


U-200PZH4E8




[FIND OUT MORE ABOUT BIG PACI ELITE FROM 20,0 TO 25,0 KW. R32 GAS](#)

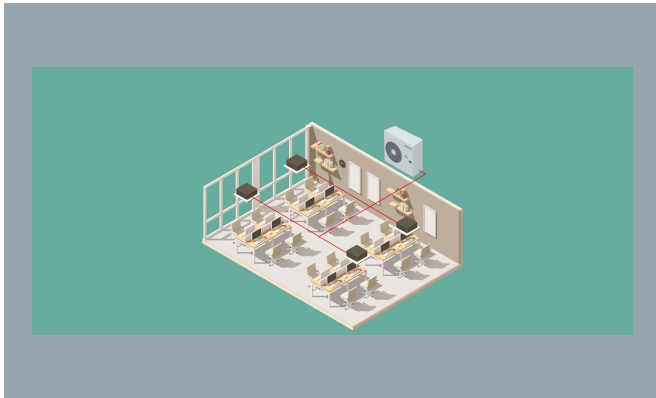

New 4 way 90x90 cassette PU3 with nanoe[®] X

These cassettes offer upgraded nanoe[®] X and Econavi technologies to make the room air more comfortable and healthy and to increase the energy efficiency.

[FIND OUT MORE](#)

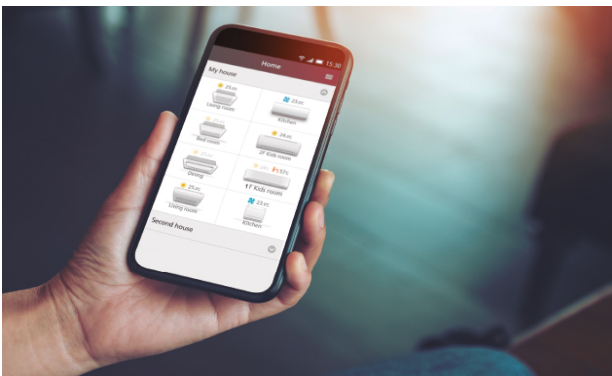

Commercial WLAN Adaptor

Panasonic CZ-CAPWFC1 interface adaptor, allows connection of one or a group of indoor units to Panasonic Comfort Cloud App, which provides control, monitoring, scheduling and error alerts.

[FIND OUT MORE](#)



New wired remote controller

CONEX with IoT integration. Not only detailed operation and maintenance settings are possible with the smartphone or tablet, but also service and diagnostic functions.

[FIND OUT MORE](#)

Big PACi NX Elite from 20,0 to 25,0kW R32

		20.0 kW
Outdoor unit three phase		U-200PZH4E8
Cooling capacity (Nominal)	kW	19,0
Cooling capacity (Min)	kW	5,7
Cooling capacity (Max)	kW	20,0
Heating capacity (Nominal)	kW	22,4
Heating capacity (Min)	kW	5,0
Heating capacity (Max)	kW	24,5
Power supply (Three phase)	V	380 - 400 - 415
Air flow (Cool Hi)	m³/min	164
Air flow (Heat Hi)	m³/min	164
Outdoor sound pressure (Cool -Hi)	dB(A)	59
Outdoor sound pressure (Heat -Hi)	dB(A)	61
Outdoor sound power (Cool -Hi)	dB(A)	77
Outdoor sound power (Heat -Hi)	dB(A)	79
Outdoor dimension (Height)	mm	996
Outdoor dimension (Width)	mm	1.140
Outdoor dimension (Depth)	mm	460
Net weight	kg	190
Pipe diameter (Liquid)	Inch (mm)	1/2 (12,70)
Pipe diameter (Gas)	Inch (mm)	7/8 (22,22)
Pipe length range	m	5 ~ 100
Elevation difference (in/out)	m	30

Big PACi NX Elite from 20,0 to 25,0kW R32		
		20.0 kW
Pipe length for additional gas	m	30
Additional gas amount	g/m	80
Refrigerant (R32) / CO2 Eq.	kg / T	4,80 / 3,24
Operating range (Cool - Min)	°C	-15
Operating range (Cool - Max)	°C	+52
Operating range (Heat - Min)	°C	-20
Operating range (Heat - Max)	°C	+35

Complementary products