
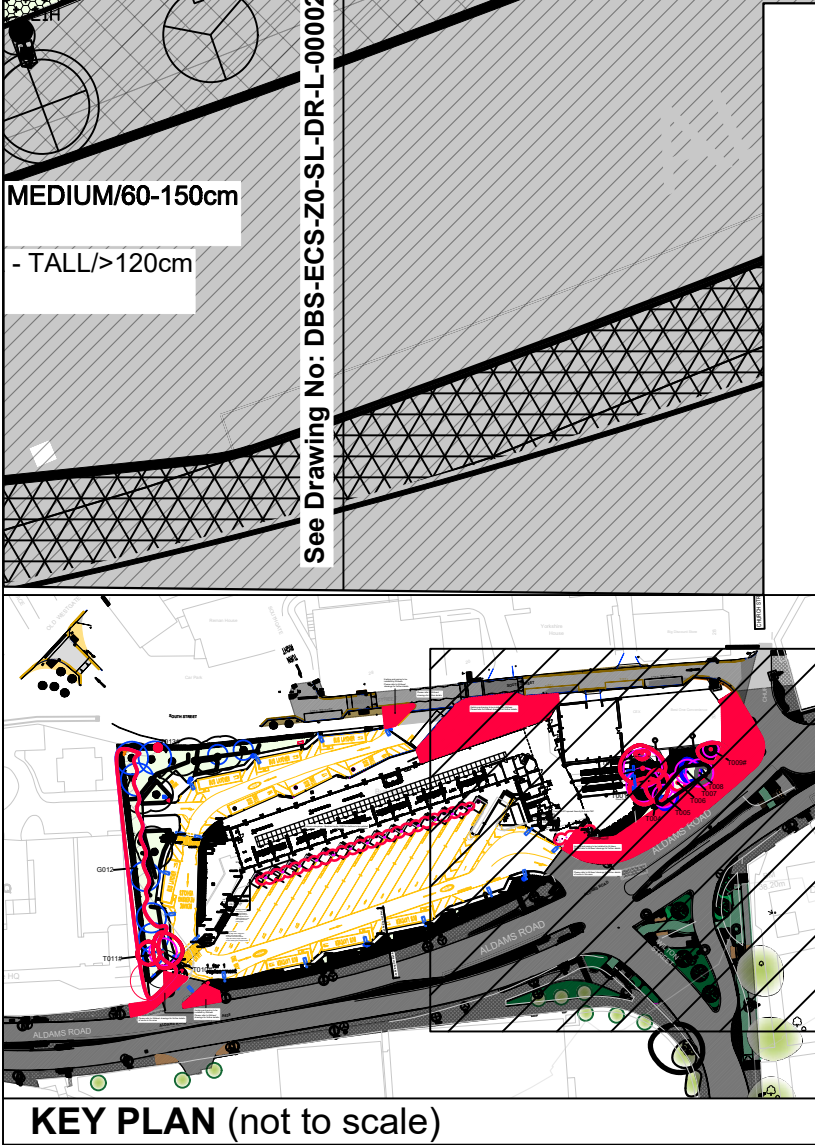


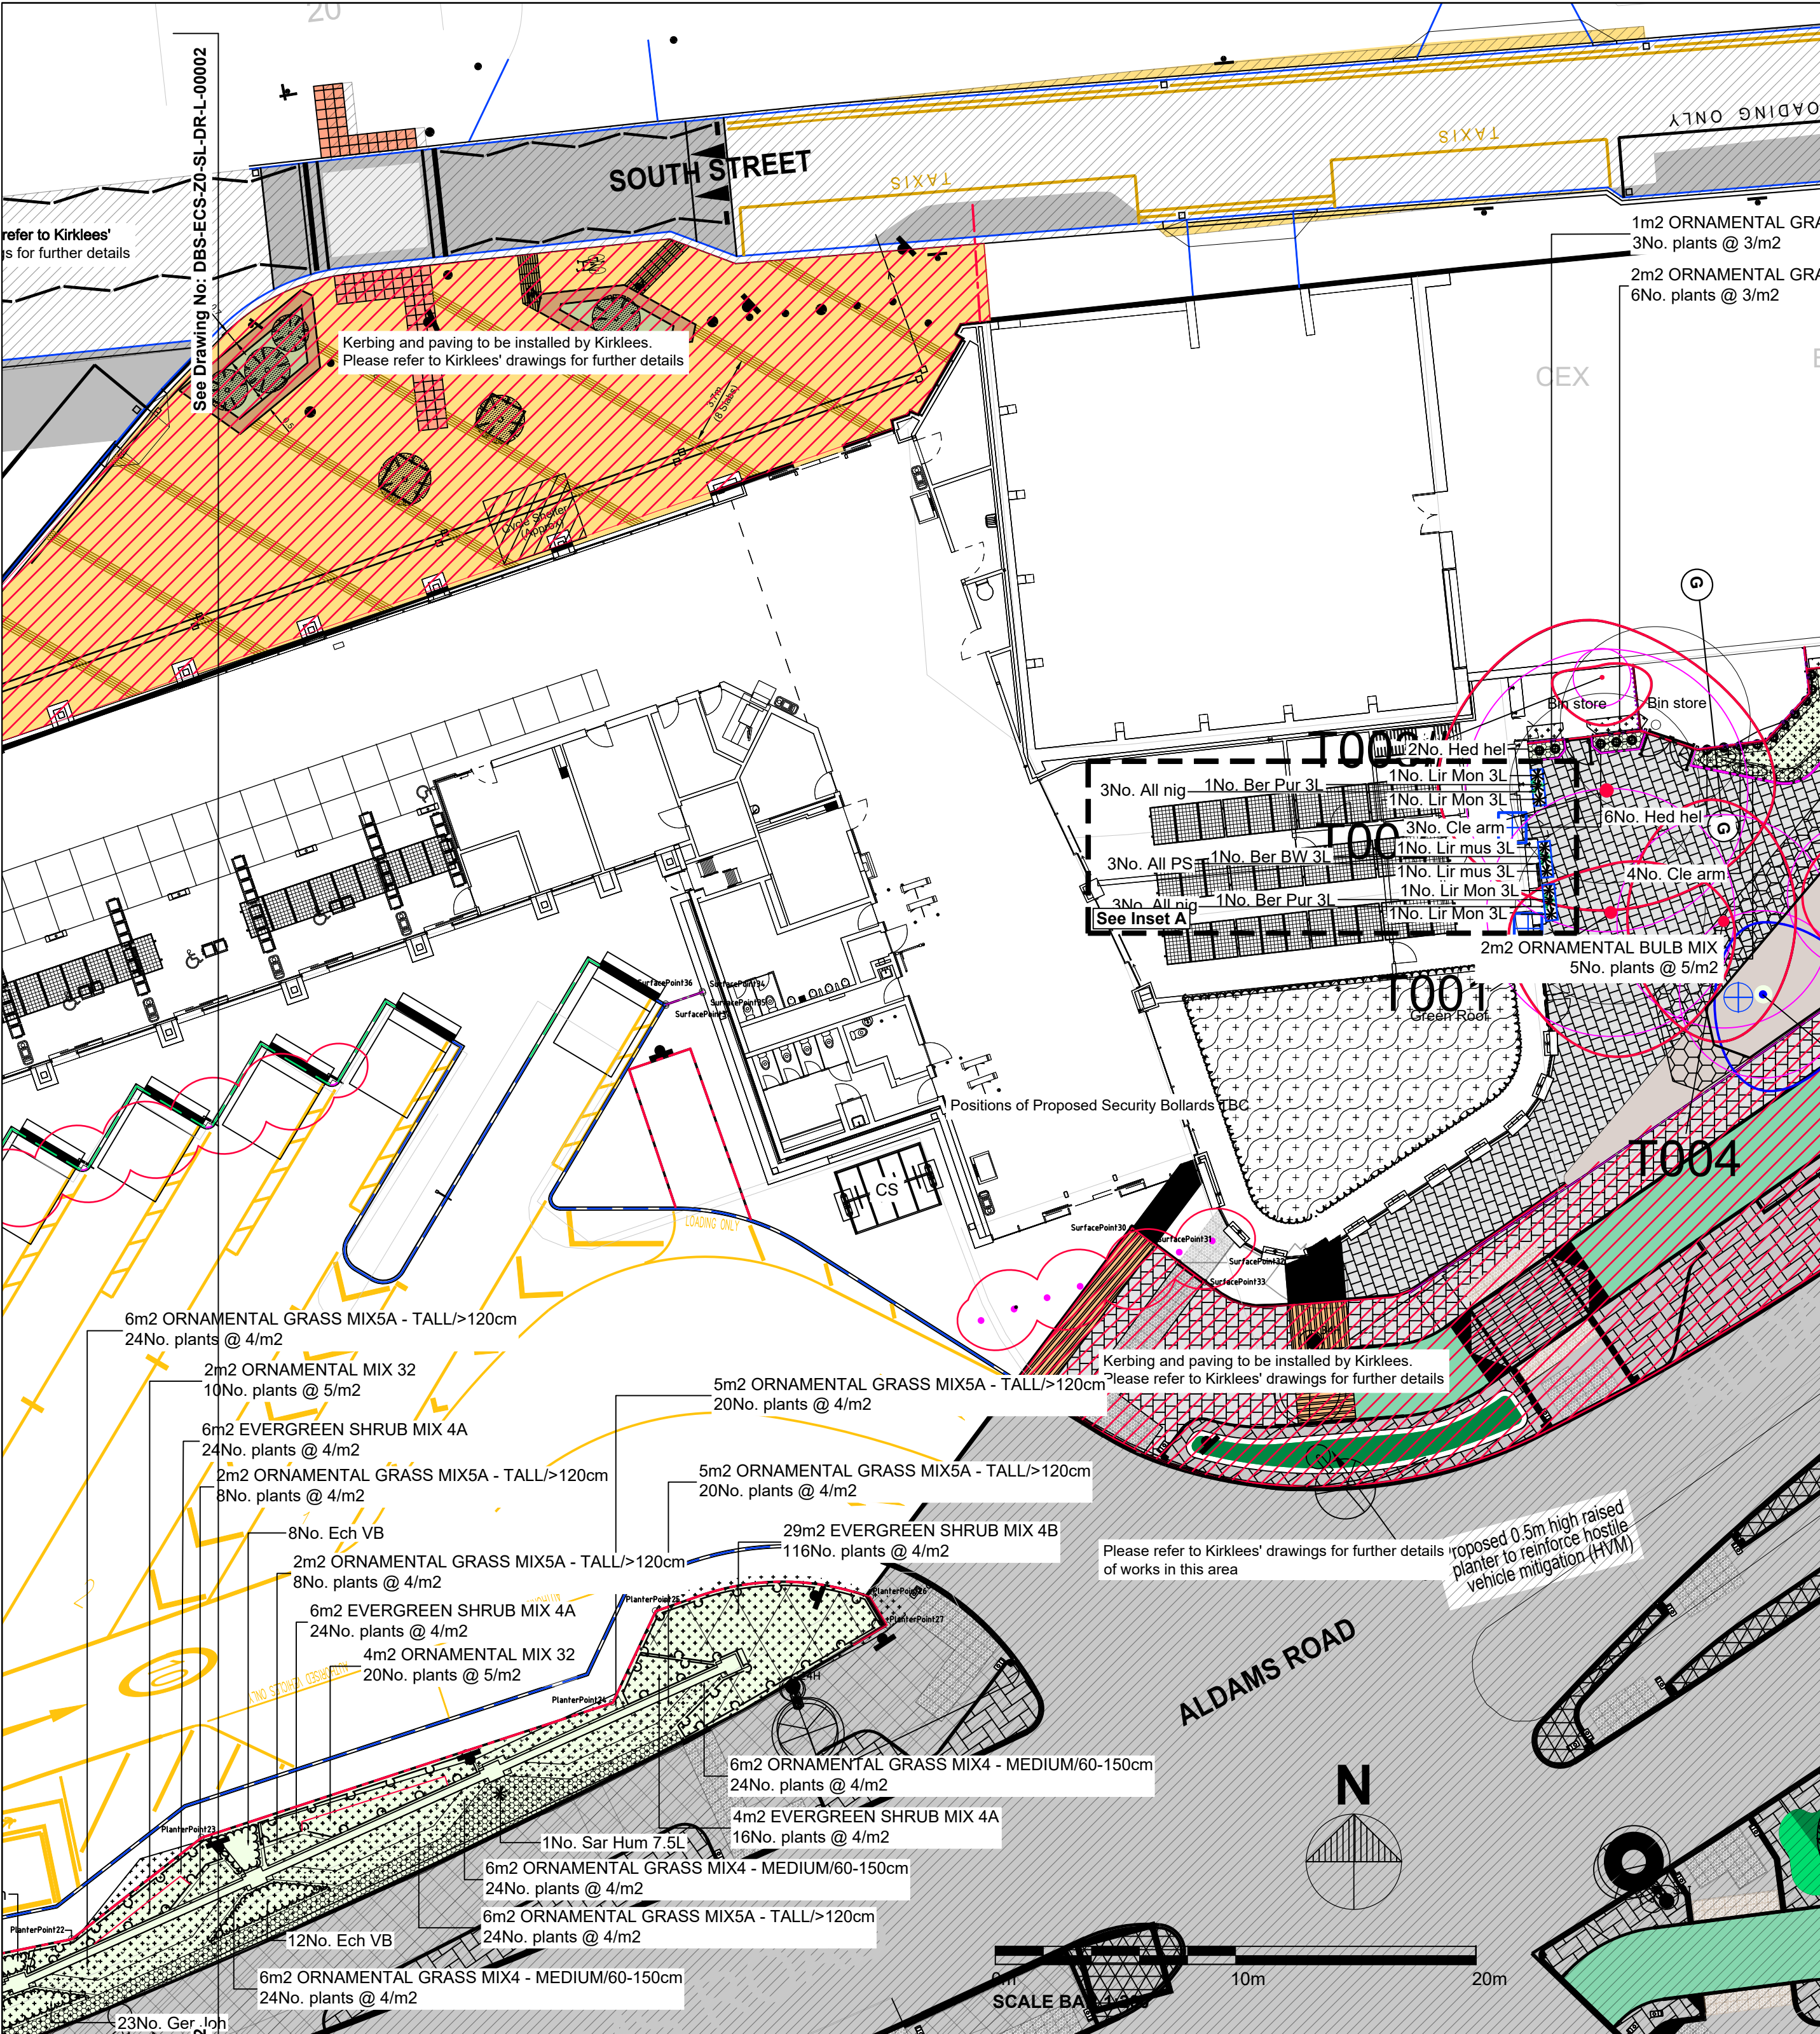

PLANT SCHEDULE

TREES

QTY	CODE	PLANT NAME	STOCK	FORM	GIRTH/HEIGHT	SPECIFICATION
3No.	BET FAS hs	Betula pendula 'Fastigiata'	RB	STD	12-14cm	3x; heavy standard; clear stem minimum 175-200, 350-425cm
3No.	BET PEN hs12	Betula pendula	RB	STD	12-14cm	ht: 5 breaks
3No.	PRU PAD xhs14	Prunus padus	RB	STD	14-16cm	3x; Extra Heavy Standard; clear stem 175-200cm; 5 breaks
3No.	SOR STR xhs14	Sorbus aucuparia 'Streetwise'	RB	EHS	14-16cm	3x; Extra Heavy Standard; clear stem 175-200cm; 5 breaks

HEDGES

QTY	CODE	PLANT NAME	STOCK	SIZE
131m		Hombeam Hedge 60-80cm	B Trans	60-80cm
786No.		Plants spaced @ 6m in a Double Staggered Row		

SHRUBS

QTY	CODE	PLANT NAME	STOCK	SIZE	SPACING	SPECIFICATION
4No.	Bra Sun	Brachyglottis 'Sunshine'	C 3L	30-40cm	3m2	Branched; 4 breaks
4No.	Cean PB 10L	Ceanothus 'Puglet Blue'	C 10L	60-80cm	2m2	Bushy
2No.	Heb Red 10L	Hebe 'Red Edge'	C 10L	30-40cm	1m2	Bushy; 9 breaks
6No.	Lon pil	Lonicera pileata	C 2L	20-30cm	3m2	Bushy; 3 breaks
1No.	Pin mop 10-15L	Pinus mugo 'Mops'	C 10-15L	30-40cm	2m2	Bushy
2No.	Sar Hum 7.5L	Sarcococca hookeriana 'humilis'	C 7.5L	25-30cm	3m2	Branched; 7 breaks
1No.	Vib Daw 10L	Viburnum x bodnantense 'Dawn'	C 10L	80-100cm	1m2	Branched; 4 breaks
22No.	Vin Ger	Vinca minor 'Gertrude Jekyll'	C 2L	20-30cm	5m2	Several shoots; 3 breaks

HERBACEOUS PLANTS

QTY	CODE	PLANT NAME	STOCK	SPACING	SPECIFICATION
11No.	Aca spl	Acanthus spinosus	C 0.5L	6m2	Full pot
1No.	Ber BW 3L	Bergenia 'Bressingham White'	C 3L	5m2	Full pot
2No.	Ber Pur 3L	Bergenia cordifolia 'Purpurea'	C 3L	5m2	Full pot
4No.	Ech VB	Echinops ruthenicus 'Veitche Blue'	C 2L	3m2	Full pot

HERBACEOUS PLANTS continued

QTY	CODE	PLANT NAME	STOCK	SPACING	SPECIFICATION
54No.	Ger Joh	Geranium endressii 'Johnsons Blue'	C 2L	6m2	Full pot
16No.	Heu PP	Heuchera micrantha 'Palace Purple'	C 2L	5m2	Full pot
2No.	Lir mus 3L	Liriope muscari	C 3L	5m2	Full pot
4No.	Lir Mon 3L	Liriope muscari 'Monroe White'	C 3L	5m2	Full pot

CLIMBERS

QTY	CODE	PLANT NAME	STOCK	HEIGHT	HABIT	SPECIFICATION
7No.	Cle arm	Clematis armandi	C 3L	60-80cm	Twiner	Caned; several shoots; 2 breaks
8No.	Hed hel	Hedera helix	C 3L	60-80cm	Self-clinger	

BULBS/WILDFLOWERS

QTY	CODE	PLANT NAME	STOCK	SPACING	SPECIFICATION
72No.	All gig 2L	Allium giganteum	C 2L	5m2	Full pot
6No.	All nig	Allium nigrum	Grade 12+	10m2	
3No.	All PS	Allium 'Purple Sensation'	Grade 12+	10m2	

PLANT MIXES

PERCENT	QTY	PLANT NAME	STOCK	SIZE	SPECIFICATION
24m2	EVERGREEN SHRUB MIX 3 planted @ 4m2				
25%	24No.	Vinca minor 'Gertrude Jekyll'	C 2L	20-30cm	Several shoots; 3 breaks
25%	24No.	Bergenia 'Bressingham Ruby'	C 2L	-	Full pot
25%	24No.	Lavandula angustifolia 'Hidcote'	C 2L	15-20cm	Bushy; 5 breaks
25%	24No.	Heuchera villosa 'Palace Purple'	C 2L	-	Full pot

33m2 EVERGREEN SHRUB MIX 4A planted @ 4m2

QTY	CODE	PLANT NAME	STOCK	SIZE	SPECIFICATION
25%	33No.	Vinca minor 'Gertrude Jekyll'	C 2L	20-30cm	Several shoots; 3 breaks
25%	33No.	Erica carnea	C 1L	-	Bushy
25%	33No.	Hebe sutherlandii	C 2L	15-20cm	Bushy; 3 breaks
25%	33No.	Santolina virens	C 2L	20-30cm	Bushy; 5 breaks

62m2 EVERGREEN SHRUB MIX 4B planted @ 4m2

QTY	CODE	PLANT NAME	STOCK	SIZE	SPECIFICATION
25%	62No.	Erica carnea	C 1L	-	Bushy
25%	62No.	Hebe sutherlandii	C 2L	15-20cm	Bushy; 3 breaks
25%	62No.	Santolina virens	C 2L	20-30cm	Bushy; 5 breaks
25%	62No.	Rubus 'Betty Ashburner'	C 2L	30-40cm	Bushy; 3 breaks

19m2 ORNAMENTAL MIX 31 planted @ 5m2

QTY	CODE	PLANT NAME	STOCK	SIZE	SPECIFICATION
25%	24No.	Lonicera ligustrina var. pileata	C 2L	20-30cm	Bushy; 3 breaks
25%	24No.	Verbena bonariensis	C 2L	-	Full pot
25%	24No.	Brachyglottis	C 2L	20-30cm	Branched; 3 breaks
25%	24No.	Acanthus spinosus	C 2L	-	Full pot

Individual varieties to be planted in groups of 1, 3 and 5.

22m2 ORNAMENTAL MIX 32 planted @ 5m2

QTY	CODE	PLANT NAME	STOCK	SIZE	SPECIFICATION
40%	44No.	Salvia officinalis	C 1L	-	Full pot
30%	33No.	Verbena Bonariensis	C 2L	-	Full pot
30%	33No.	Sarcococca hookeriana var. humilis	C 2L	20-25cm	Bushy; 4

Individual varieties to be planted in groups of 1, 3 and 5.

15m2 ORNAMENTAL MIX 33 planted @ 5m2

QTY	CODE	PLANT NAME	STOCK	SIZE	SPECIFICATION
15%	11No.	Achillea 'Summerwine'	C 2L	-	Full pot
20%	15No.	Acanthus spinosus	C 2L	-	Full pot
15%	11No.	Bergenia 'Bressingham Ruby'	C 2L	-	Full pot
20%	15No.	Heuchera micrantha 'Palace Purple'	C 2L	-	Full pot
10%	8No.	Verbena Bonariensis	C 2L	-	Full pot
20%	15No.	Allium giganteum	Bulb	-	Grade 18/20

Individual varieties to be planted in groups of 1, 3 and 5. Allium bulbs to be scattered throughout planting.

4m2 ORNAMENTAL MIX 34 planted @ 5m2

QTY	CODE	PLANT NAME	STOCK	SIZE	SPECIFICATION
20%	5No.	Bergenia 'Bressingham Ruby'	C 2L	-	Full pot
20%	5No.	Echinops 'Veitche Blue'	C 2L	-	Full pot
40%	6No.	Heuchera micrantha 'Palace Purple'	C 2L	-	Full pot

Individual varieties to be planted in groups of 1, 3 and 5.

6m2 ORNAMENTAL BULB MIX planted @ 5m2

QTY	CODE	PLANT NAME	STOCK	SIZE	SPECIFICATION
6m2	6No.	Allium giganteum	Bulb	-	
20%	6No.	Galanthus 'S. Arnott'	Bulb	-	
20%	6No.	Narcissus 'Ice Follies'	Bulb	-	
20%	6No.	Hyacinthoides hispanica	Bulb	-	
20%	6No.	Lilium martagon	Bulb	-	

Bulbs to be scattered throughout planting.

KEY

Soft Works

- Existing Tree to be Retained - see Arboriculture report (Dewsbury Bus Station - BS 5837/2012 Arboricultural Report, Impact Assessment and Method Statement) produced by Ecus Ltd, Nov 24) for further details
- Tree-Existing to be Removed - see Arboriculture report for further details
- Proposed Tree - Heavy Standard / Standard - see plant schedule for species and specification
- Indicative extent of tree's mature canopy spread (if it extends beyond tree graphic symbol)
- Proposed Low Hedge - see plant schedule for species and specification
- Proposed Shrub Planting - Deterrent Evergreen - Small /less than 500mm - see plant schedule for species and specification
- Proposed Shrub Planting - Small / less than 500mm - see plant schedule for species and specification
- Proposed Herbaceous / Perennial Planting - see plant schedule for species and specification
- Proposed Green Roof - See Architectural Specification "DBS-AHR-XX-ZZ-T-A-00001" for details
- Proposed Bulb Planting - see plant schedule for species and specification
- Proposed Climbing Shrub - see plant schedule for species and specification
- Proposed Specimen Shrub - see plant schedule for species and specification
- Proposed Ornamental Grass planting - Tall height - see plant schedule for species and specification
- Proposed Ornamental Grass planting - Medium height - see plant schedule for species and specification
- Proposed Ornamental Grass planting - Short height - see plant schedule for species and specification
- Proposed Grass rich with Wildflower - 80% Emorsgate EM2 mix (4g/m2) and 20% Emorsgate EC1 mix (2g/m2)
- Proposed Root barrier - shown indicatively. ReRoot 1000 (Ribbed) by GreenBlue Urban (www.greenblue.com) or similar approved
- Proposed bulb planting in raised planter. Plant in groups of 3 as shown. See plant schedule for species and specification
- Proposed raised free standing planters - see Q31 C292 and Q28 Cl 105 in Landscape Specification for details
- Proposed Mulch Surfacing - see Q28 Cl 845 from Landscape Specification for further details

GENERAL NOTES

- Cura Terrae Land & Nature (CTLN - formerly Ecus) drawing) document references:
DBS-ECS-ZO-SL-DR-L-00001 General Arrangement
DBS-ECS-ZO-SL-DR-L-00002 Planting Plan sheet 1 of 2
DBS-ECS-ZO-SL-DR-L-00003 Planting Plan sheet 2 of 2
DBS-ECS-ZO-SL-DR-L-00004 Typical Details - Southern Wall
DBS-ECS-ZO-SL-DR-L-00005 Typical Details - Paving
DBS-ECS-ZO-SL-DR-L-00006 Typical Details - Tree Pits
DBS-ECS-ZO-SL-DR-L-00007 Typical Details - Eastern area
DBS-ECS-ZO-SL-DR-L-00008 Maintenance Schedule
DBS-ECS-ZO-SL-DR-L-00010 Landscape Proposals - Southern Boundary Wall Setting Out Information
DBS-ECS-ZO-SL-DR-L-00011 Landscape Proposals - Surfacing Setting Out Information
DBS-ECS-ZO-SL-DR-L-00012 Landscape Proposals - Planters Setting Out Information
DBS-ECS-ZO-SL-DR-L-00013 Landscape Proposals - Eastern Area Setting Out Information (Bin Store & Planter Edges)
DBS-ECS-ZO-SL-DR-L-00014 Typical Details - Cycle Store
DBS-ECS-ZO-SL-DR-L-00015 Typical Details - Pedestrian Guardrail
DBS-ECS-ZO-SL-DR-L-00001 Landscape Specification

- Refer to latest revision "Dewsbury Bus Station - BS 5837/2012 Arboriculture Report, Impact Assessment and Method Statement" Willmot Dixon Construction Ltd" originally produced by Ecus Ltd, Nov 24, for details of existing vegetation to be retained and protection measures. All works within the vicinity of the existing trees to be overseen by an appointed qualified Arboricultural consultant acting as ECoW in accordance with the Arboricultural Method Statement.
- Building / Site Layout provided by AHR Architects Ltd on drawing no: DBS-AHR-XX-00-D-A-20001_P5
- Refer to Bryan C Hall's Setting Out Information for Fencing, Guardrails and Security & Heavy Duty Bollards on Drawing "Apron Works Proposed Fencing & Guardrails", Dwg No: DBS-BGH-ZO-XX-DR-C-0010
- For details of the wall structure, refer to engineer's detail drawing no: DBS-RCS-SSK-01
- Building foundations to be confirmed by Engineer with reference to planting positions and NHC guidance (or alternative where applicable). Tree locations to be fully co-ordinated once building foundation depth are confirmed. Requirements for root barriers to be confirmed by an engineer.
- Refer to Engineer's details for level and drainage information
- Levels to be confirmed following coordination with the design team.
- Levels to be verified by the contractor with any variations to be reported to the drainage engineer
- For utilities information, see "DBS-KZN-ZO-XX-D-U-1001" produced by HEB/Keizen Consulting Engineers
- For Green roof details, refer to "DBS-AHR-XX-ZZ-T-A-00001" Architectural Specification
- The contractor is responsible for the accurate execution of all setting out information and to ensure it meets the necessary industry standards. Any discrepancies or issues to be reported to the Landscape Architect
- Setting out on site to be agreed with Landscape Architect
- Check all dimensions on site.
- Do not scale from this drawing
- Report any discrepancies and omissions to CTLN
- This drawing is Copyright
- All levels indicative only. Extrapolated from site levels. All require to be checked.
- All details subject to approval by the local authority for the discharge of relevant planning conditions.

3RD-PARTY INFORMATION
NB This drawing includes information provided by independent surveyors and / or consultants, to whom all queries shall be made. CTLN can accept no liability for its context or accuracy.

DESIGN
Unless stated otherwise, the designs shown are subject to detailed site survey, investigations, and legal definition, the CDM regulations and the comments and / or approval of the various relevant Local Authority Officers, Statutory Undertakers, Fire Officers, Engineers and the like. They are copyright, project specific and confidential. No part is to be used or copied in anyway without the express prior consent of CTLN.

TREE NOTES:
Note that all tree and shrub locations are subject to coordination with services, to be undertaken by others. The requirement for root barriers is to be confirmed by an engineer.
Note that it is best practice that root barriers are required to extend 2m beyond the mature canopy spread of new trees to protect all structures and hard landscape elements, such as highways, services and buildings. In addition, root barriers are required for all new trees within 5m of highways - e.g. GreenBlue Urban 'ReRoot 2000' or similar. Depth of tree root barrier to be confirmed by an engineer once services design has been produced at construction detail. Install to manufacturer's and engineer's guidance.

SETTING OUT INFORMATION
It is the contractor's responsibility to ensure the setting out information is correct prior to construction. Any queries or discrepancies are to be raised immediately.

CDM - Risks / Hazards

1. Proposed locations of landscape elements shown are subject to the presence of below ground services. A detailed survey is to be undertaken and necessary method statements prepared and approved prior to undertaking any excavations / work within this area.
2. Care to be taken when working in proximity to the surrounding existing roads.
3. Care to be taken when clearing the existing site due to the potential presence of needles, litter etc.

ID	RISK	MITIGATION	DATE OF MITIGATION
RESIDUAL PROJECT RISKS			
C05	28.07.26	JS	CTLN

C04	26.03.26	JS	CTLN
C03	24.11.25	JS	CTLN

C02	29.07.25	JS	CTLN
C01	17.07.25	JS	CTLN

02	29.07.25	JS	CTLN	Key and notes updated
01	17.07.25	JS	CTLN	Stage 5 Issue

REV	DATE	DRAWN BY	CHECKED BY	REVISION COMMENT

DRAWING STATUS: Construction

Job
DEWSBURY BUS STATION

Title
Landscape Proposals - Detailed Planting Plan - Sheet 2 (of 2)

Drawn by	Date	Scale
TA	Dec 23	As shown at A1

Drg. no.	Rev
DBS-ECS-ZO-SL-DR-L-00003	C05

Any plants that fails to establish within a period of 5 years from the completion are to be replaced in the next planting season on a like for like basis unless written consent is provided by the Local Planning Authority to vary the approved details.