

KEY:

SAW CUT EXISTING FOOTWAY LEVELS TO TIE PROPOSED IN NEATLY

FULL FOOTWAY CONSTRUCTION

20mm SURFACE COURSE - AC6 DENSE SURF 100/150
50mm BINDER COURSE - AC20 DENSE BIN 100/150
100mm TYPE 1 SUB BASE TO SERIES 800 MCHW

FOOTWAY PLANE AND REPLACE

PLANE EXISTING SURFACE COURSE; CLEAN OFF ALL LOOSE MATERIAL, SPRAY WITH TACK COAT, AND LAY:
20mm SURFACE COURSE - AC6 DENSE SURF 100/150

NARROW WIDENING FOOTWAY CONSTRUCTION

20mm SURFACE COURSE - AC6 DENSE SURF 100/150
50mm BINDER COURSE - AC20 DENSE BIN 100/150
SUB BASE TO BE REPLACED WITH ST4 CONCRETE

GRASS VERGE

150mm OF TOPSOIL AND SEED TO BE LAID

K1 255x125mm HALF BATTERED PCC KERB TO BE LAID WITH 100mm UPSTAND



K14 255x125mm DROPPER LEFT TRANSITION KERB TO BE LAID TO TRANSITION 100mm UPSTAND TO 6mm

K16 255x125mm DROPPER RIGHT TRANSITION KERB TO BE LAID TO TRANSITION KERB UPSTAND FROM 6mm BACK TO 100mm

K15 150x125mm BULL NOSED KERB TO BE LAID FLUSH WITH THE SURROUNDING CARRIAGEWAY

E1 150x50 EDGING KERB TO BE LAID FLUSH WITH BACK OF FOOTWAY AND SURROUNDING TACTILE / CORDUROY FLAGS

DC K14-K16x2-K15
450x450mm TACTILE FLAGS REFER TO: KMBC HD/SD/11/11b FOR DETAIL

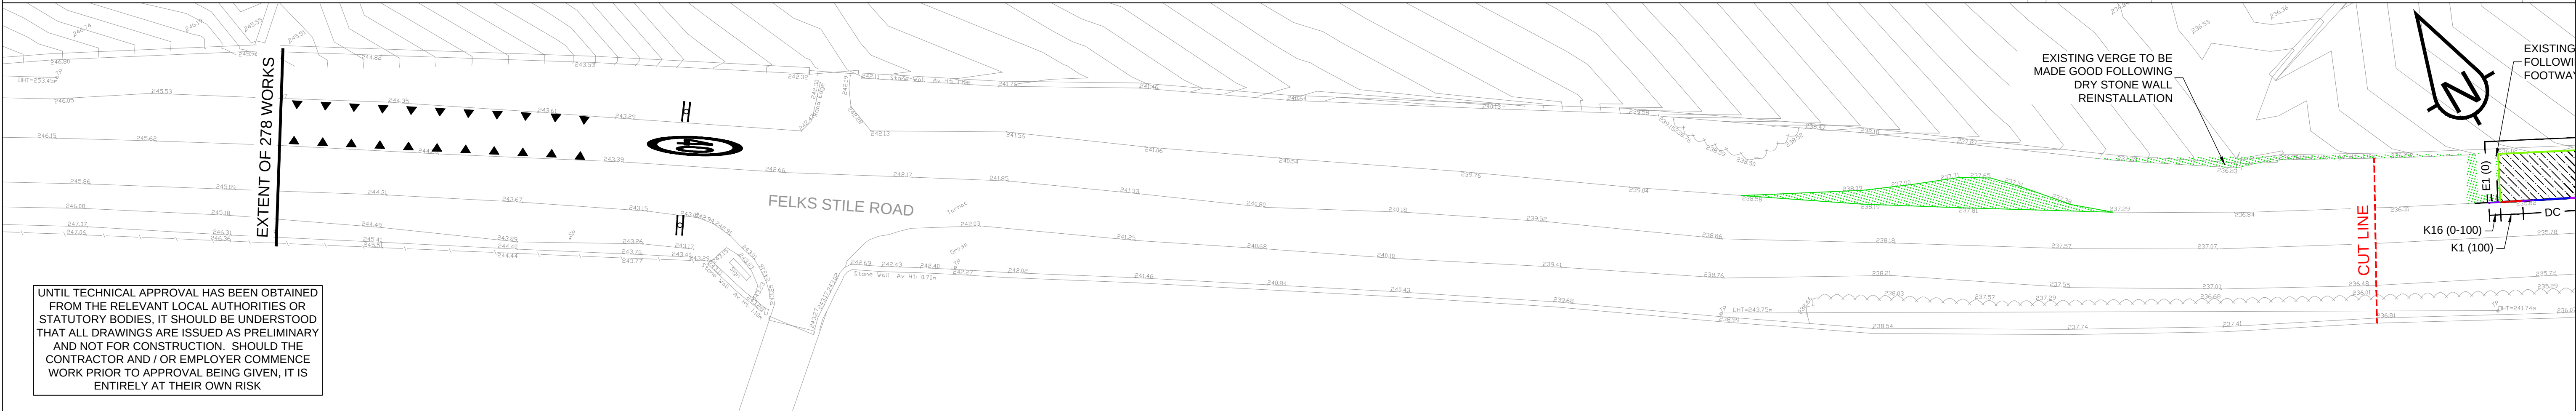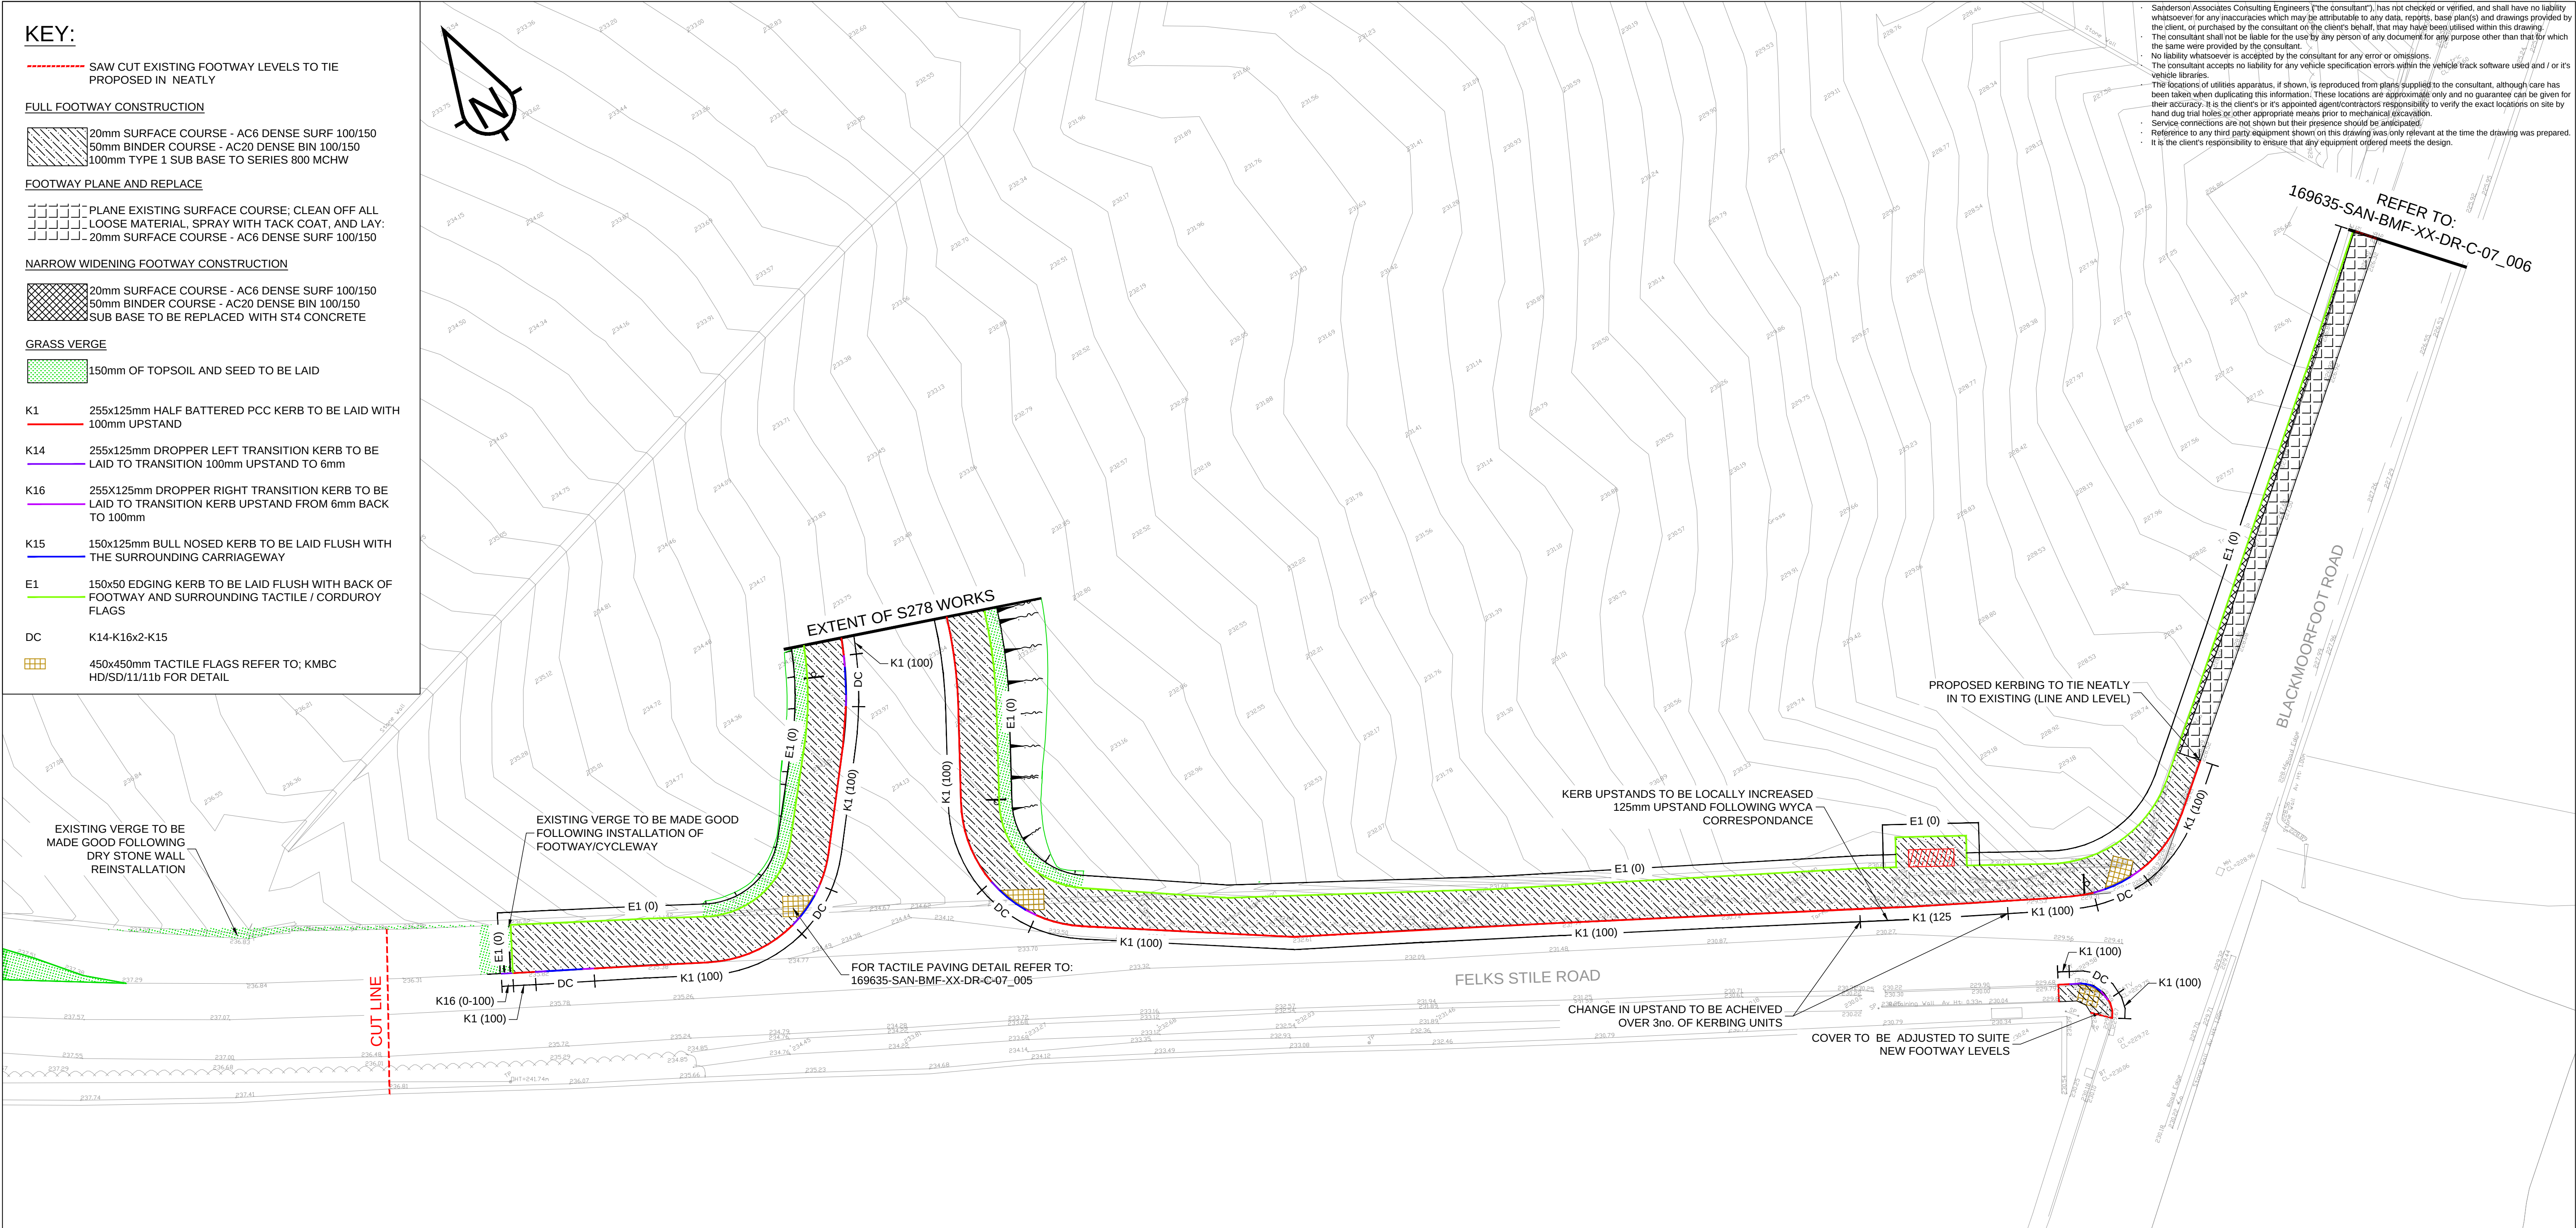

UNTIL TECHNICAL APPROVAL HAS BEEN OBTAINED FROM THE RELEVANT LOCAL AUTHORITIES OR STATUTORY BODIES, IT SHOULD BE UNDERSTOOD THAT ALL DRAWINGS ARE ISSUED AS PRELIMINARY AND NOT FOR CONSTRUCTION. SHOULD THE CONTRACTOR AND / OR EMPLOYER COMMENCE WORK PRIOR TO APPROVAL BEING GIVEN, IT IS ENTIRELY AT THEIR OWN RISK

P04	BASE LAYOUT AMENDED FOLLOWING COMMENTS RECEIVED BY KMBC ON 11/05/2026	SS	22/05/2026	JLG
Rev	Amendment	Drawn	Date	Checked

P03	AMENDED FOLLOWING MEETING WITH MILLER HOMES ON 20/04/2026	SS	24/04/2026	JLG
P02	AMENDED FOLLOWING COUNCIL COMMENTS RECEIVED 16/03/2026	SS	15/04/2026	DB
P01	FIRST ISSUE	JBG	03/10/2025	TC
Rev	Amendment	Drawn	Date	Checked
Drawing Status				
S5 - FOR APPROVAL				

Client	MILLER HOMES	Project Title	Scale	Drawing Size	Drawn By	Checked By
		SECTION 278 WORKS BLACKMOORFOOT	1:250	A1	JBG	TC
		Drawing Title	Project Number		Date	Approved By
		PROPOSED KERBING AND FOOTWAYS	169635		OCT 25	DB
		Drawing Number				Rev
		169635-SAN-BMF-XX-DR-C-11_001				P04