

DO NOT SCALE EXCEPT FOR PLANNING AND BUILDING REGULATION PURPOSES

GENERAL NOTES

LIGHTING :-
ALL LIGHTING TO BE POSITIONED TO AVOID DIRECT GLARE ON THE EYES OF THE USER AND UNWANTED REFLECTIONS FROM THE SCREEN OR OPERATING FEATURES. GLARE FROM LIGHTING TO BE AVOIDED.
SIGNAGE :-
ALL SIGNAGE TO CONFORM TO BS 8300:2001 SECTIONS 9.2.2 LOCATION & DESIGN OF SIGNS & INFORMATION AND 9.2.3 VISUAL SIGNS.
ALL NEW GLAZING CONFORMS TO BS 6206.
ALL ELECTRICAL WORK CONFORMS TO BS 7671.

IT IS ASSUMED THAT ALL PRELIMINARY WORKS CARRIED OUT / CONTRACTED BY THE SITE OWNER (SHOULD THEY BE REQUIRED BY THE PROJECT) ARE COMPLETED IN ACCORDANCE WITH CURRENT BUILDING REGULATIONS 2010 AND AMENDMENTS THEREAFTER

SITE NOTES

FLOOR CONSTRUCTION: VINYL ON TIMBER


TTW INSTALL
TEMPORARILY REMOVE D1 UPVC DOOR FOR ATM DELIVERY ONLY
(ONLY 762MM CLEAR WIDTH WITH DOOR REMOVED / FRAME CANNOT BE REMOVED AS FULL HEIGHT OF SHOP FRONT WITH GLAZING PANEL ABOVE DOOR)
REMOVE SECTION OF UPVC SHOP FRONT INCLUDING 3 X EXISTING GLAZING PANELS, 2 X EXISTING TRANSOMS, UPVC FRAME AND SILL AS REQUIRED
MODIFY / CUT DOWN SHUTTER - NEW GUIDE, ANGLE, INFILL AND BOX SECTION REQUIRED

INSTALL - NEW SECTION OF WHITE UPVC SHOP FRONT c/w MULLION AND TRANSOMS AS SHOWN ON CAD. 2 X NEW GLAZING PANELS TO L/H/S, WHITE LAMINATE PANELS TO R/H/S, 26MM FLOOR PLATE, ATM, ELECTRICS AND ILLUMINATED SIGNAGE
MAKE GOOD INTERNAL APERTURE WITH WHITE PLASTIC TRIM
INSTALL FIRE LINED FLOOR SUPPORT


NOTE:
- NO ASBESTOS REG. NCRA TO ARRANGE ASBESTOS SURVEY REQUIRED PRIOR TO FURTHER SURVEYS AND INVASIVE WORKS COMMENCING
- ALL PROPOSED ATM INSTALL WORKS MUST ALLOW FOR FULL ATM SERVICE CLEARANCE INC. FULL RACK OUT OF REAR DISPENSERS
- ATM ELECTRICAL INSTALLATION TBC / SEE ELECTRICAL SURVEY
- NCRA SURVEYOR STATED ATM INSTALL LOCATION AS FAR TO R/H/S AS POSSIBLE / UNKNOWN BOXING / VENT AT FLOOR LEVEL
- NO ATM ENCLOSURE INSTALLED AS STATED BY CASH ZONE
- CASH ZONE REQUESTED ILLUMINATED SIGNAGE
- SHOP HAS A BASEMENT / DESTRUCTIVE FLOOR SURVEY REQUIRED
- EXISTING UPVC SHOP FRONT NOT SUITABLE FOR ATM INSTALL / NEW SECTION OF SHOP FRONT REQUIRED / DUE TO COST AND EXTENSIVE SHOP FRONT WORKS RECOMMEND PLANNING PRIOR TO ATM INSTALL
- PARKING RESTRICTIONS APPLY / 3 X CONC. BOLLARDS / ZIG ZAG LINES AND DOUBLE YELLOW LINES TO SHOP FRONT & OPPOSITE SHOP / PARKING TICKETS LIKELY

WORK TO BE CARRIED OUT BY SITE


PROVIDE FULL ACCESS FOR ASBESTOS SURVEY AND ANY ADDITIONAL SITE SURVEYS
PROVIDE CLEAR ACCESS TO BASEMENT FOR NCRA BUILDER TO INSTALL FLOOR SUPPORT UNDER ATM
REMOVE GLASS SHELING
RELOCATE 1 X COUNTER AS SHOWN ON CAD

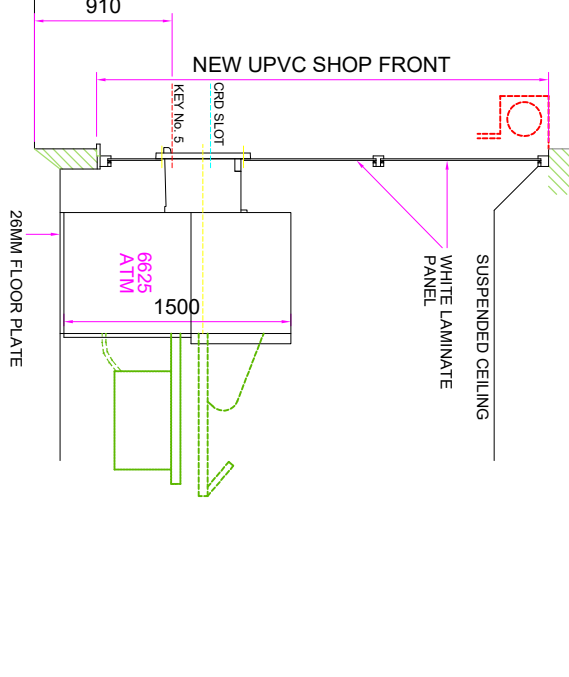


SECTION VIEW A-A

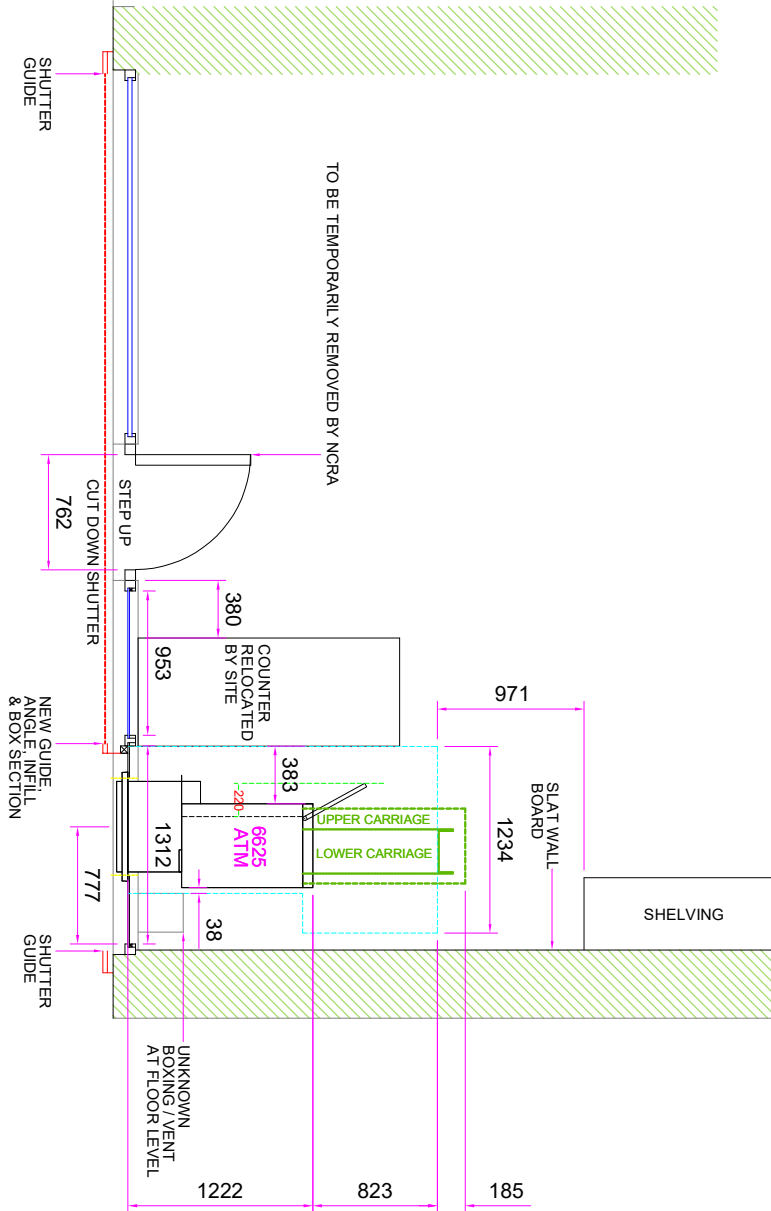

PROPOSED (PART) PLAN

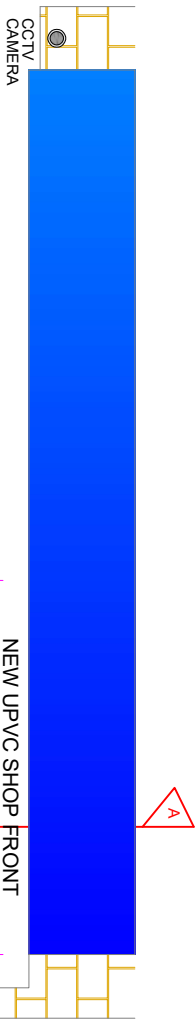

EXISTING ELEVATION

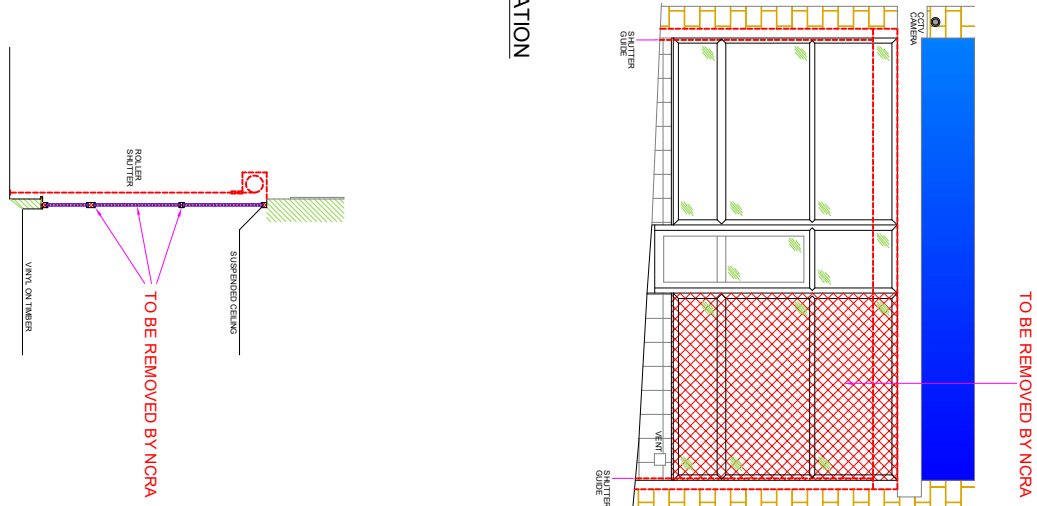

EXISTING SECTION VIEW A-A



SITE ADDRESS STAR MINI MARKET 214 MANCHESTER ROAD, THORNTON LODGE, HUDDERSFIELD, HD1 3JF	TITLE PROPOSED AUTOMATED TELLER MACHINE (ATM) INSTALLATION FOR CASHZONE		04		drawing approval	
			03			
	DRAWN MAL	DATE 18/12/25	SCALE VARIOUS @A3	01	NAME:-	
	REFERS No. E030315	SHEET	REVISION 01	DESCRIPTION	POSITION:-	APPROVED:-
					DATE:-	SIGNED:-