


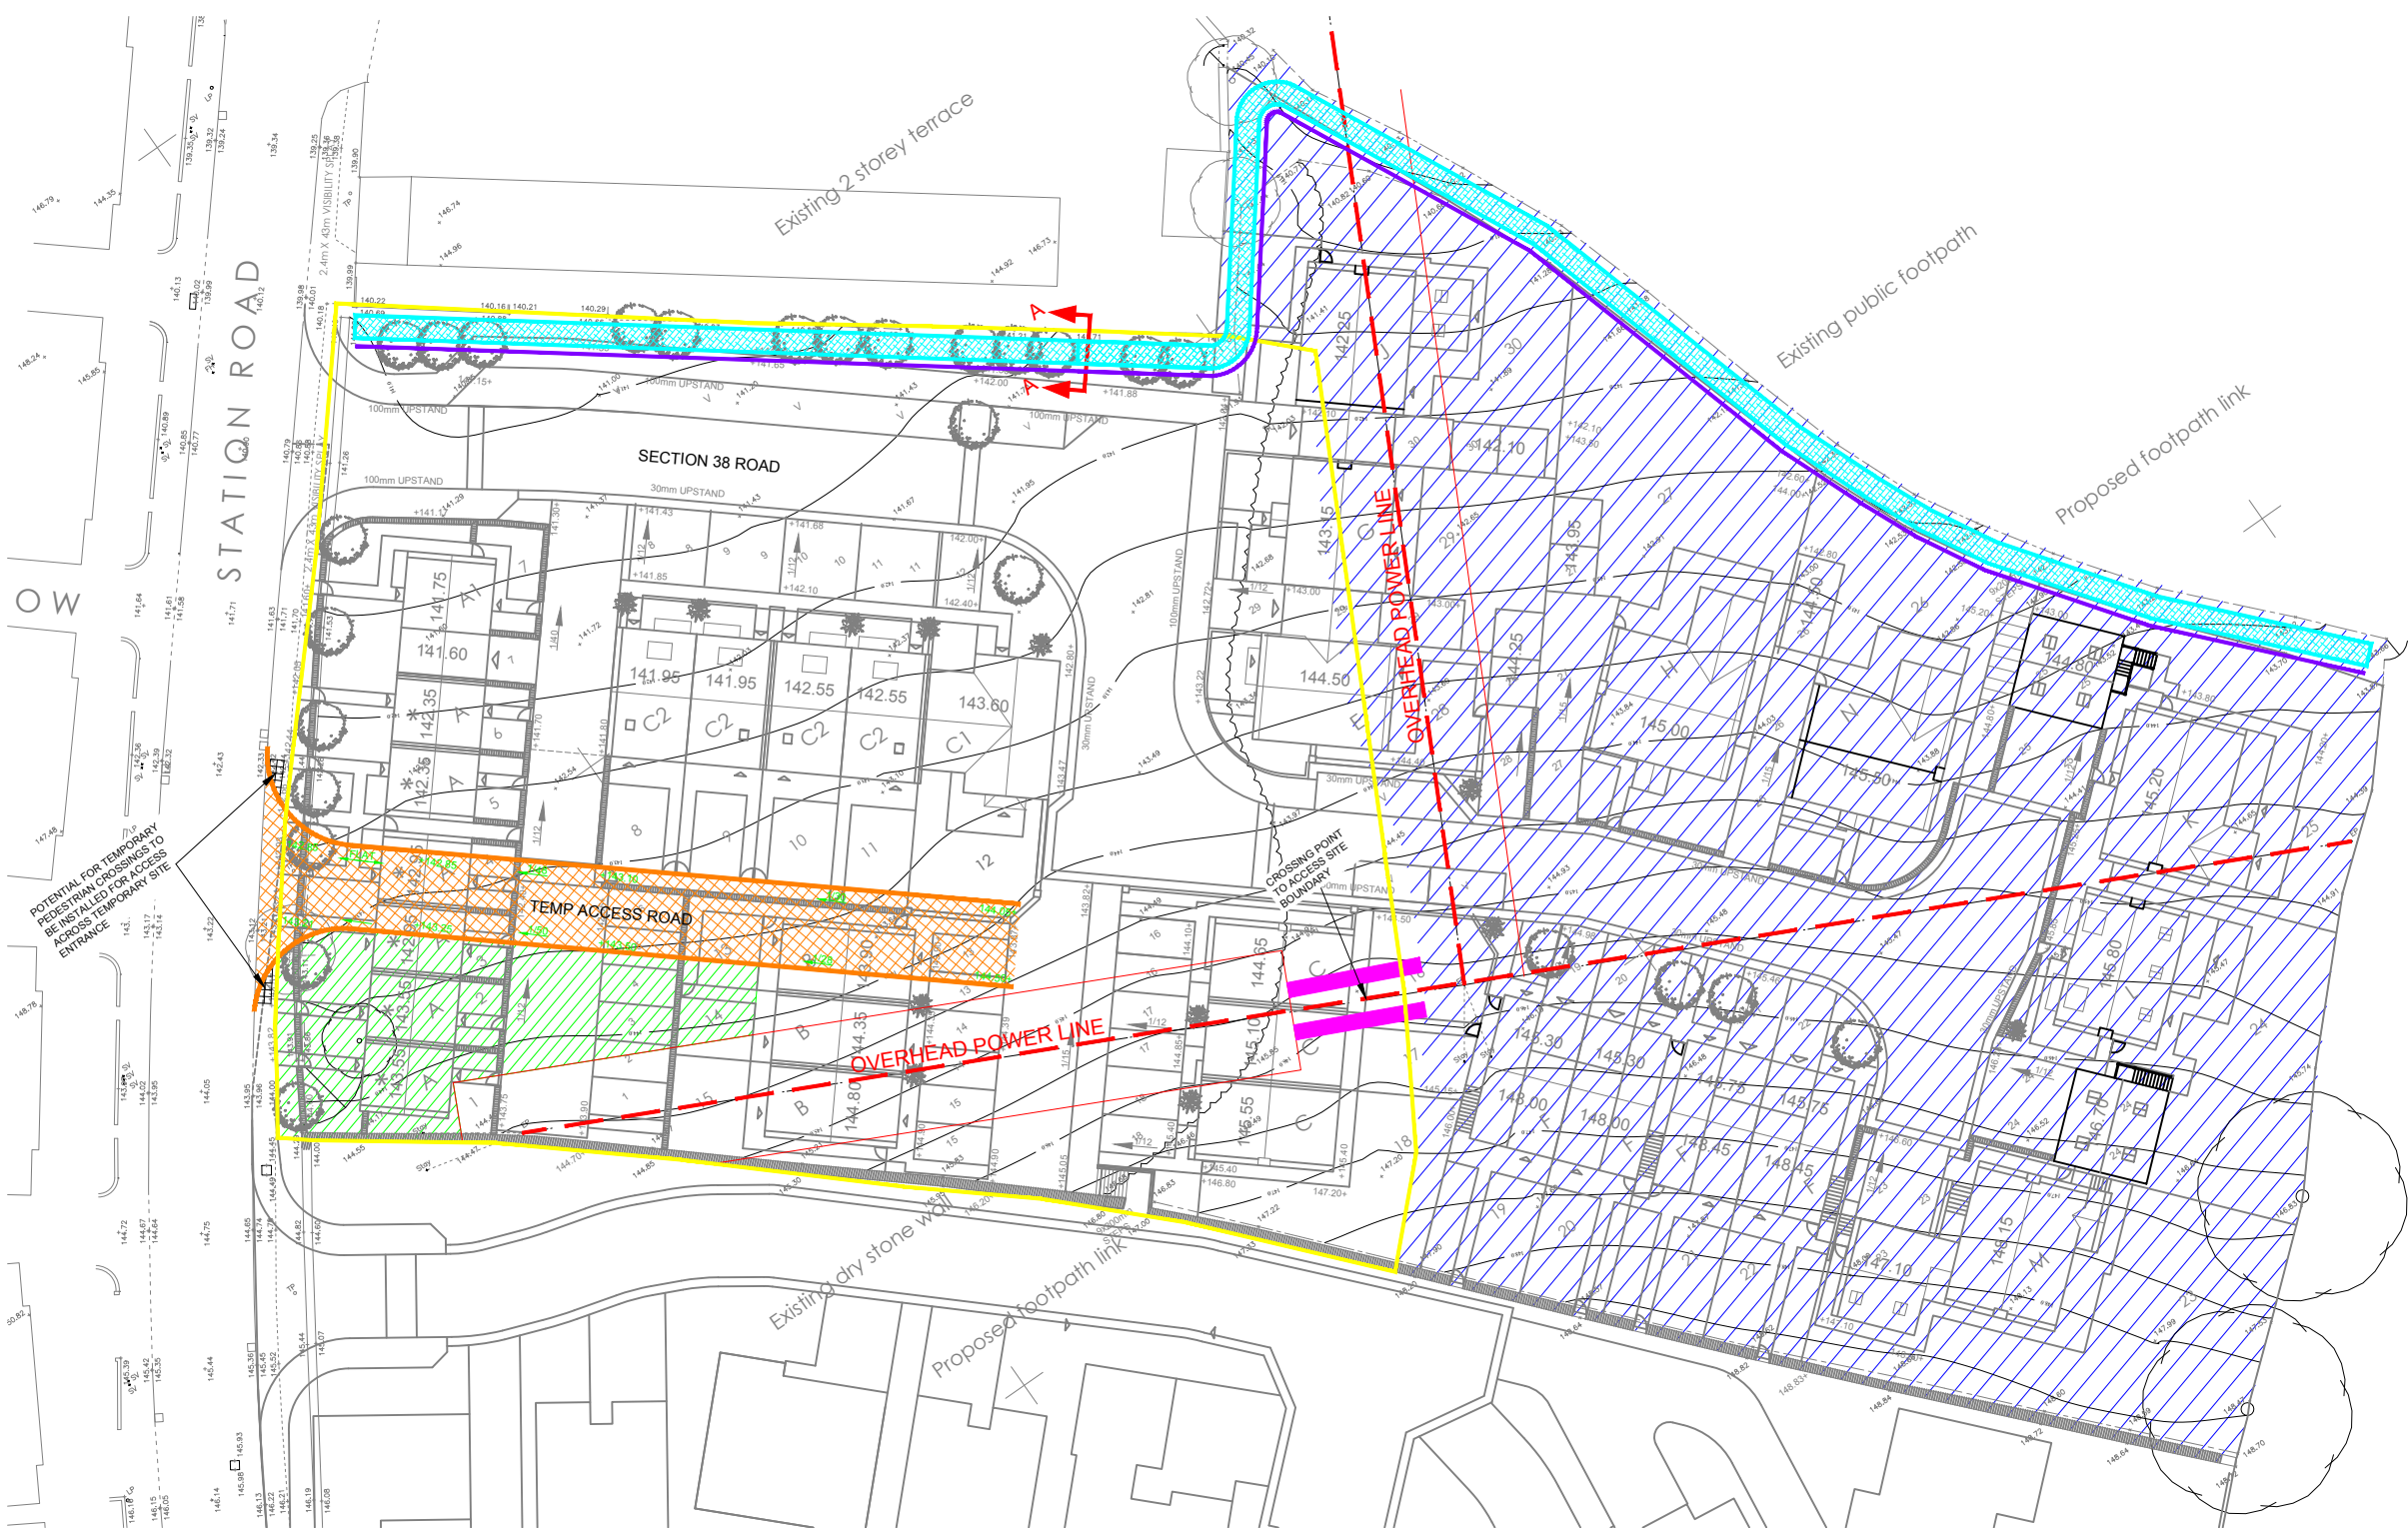
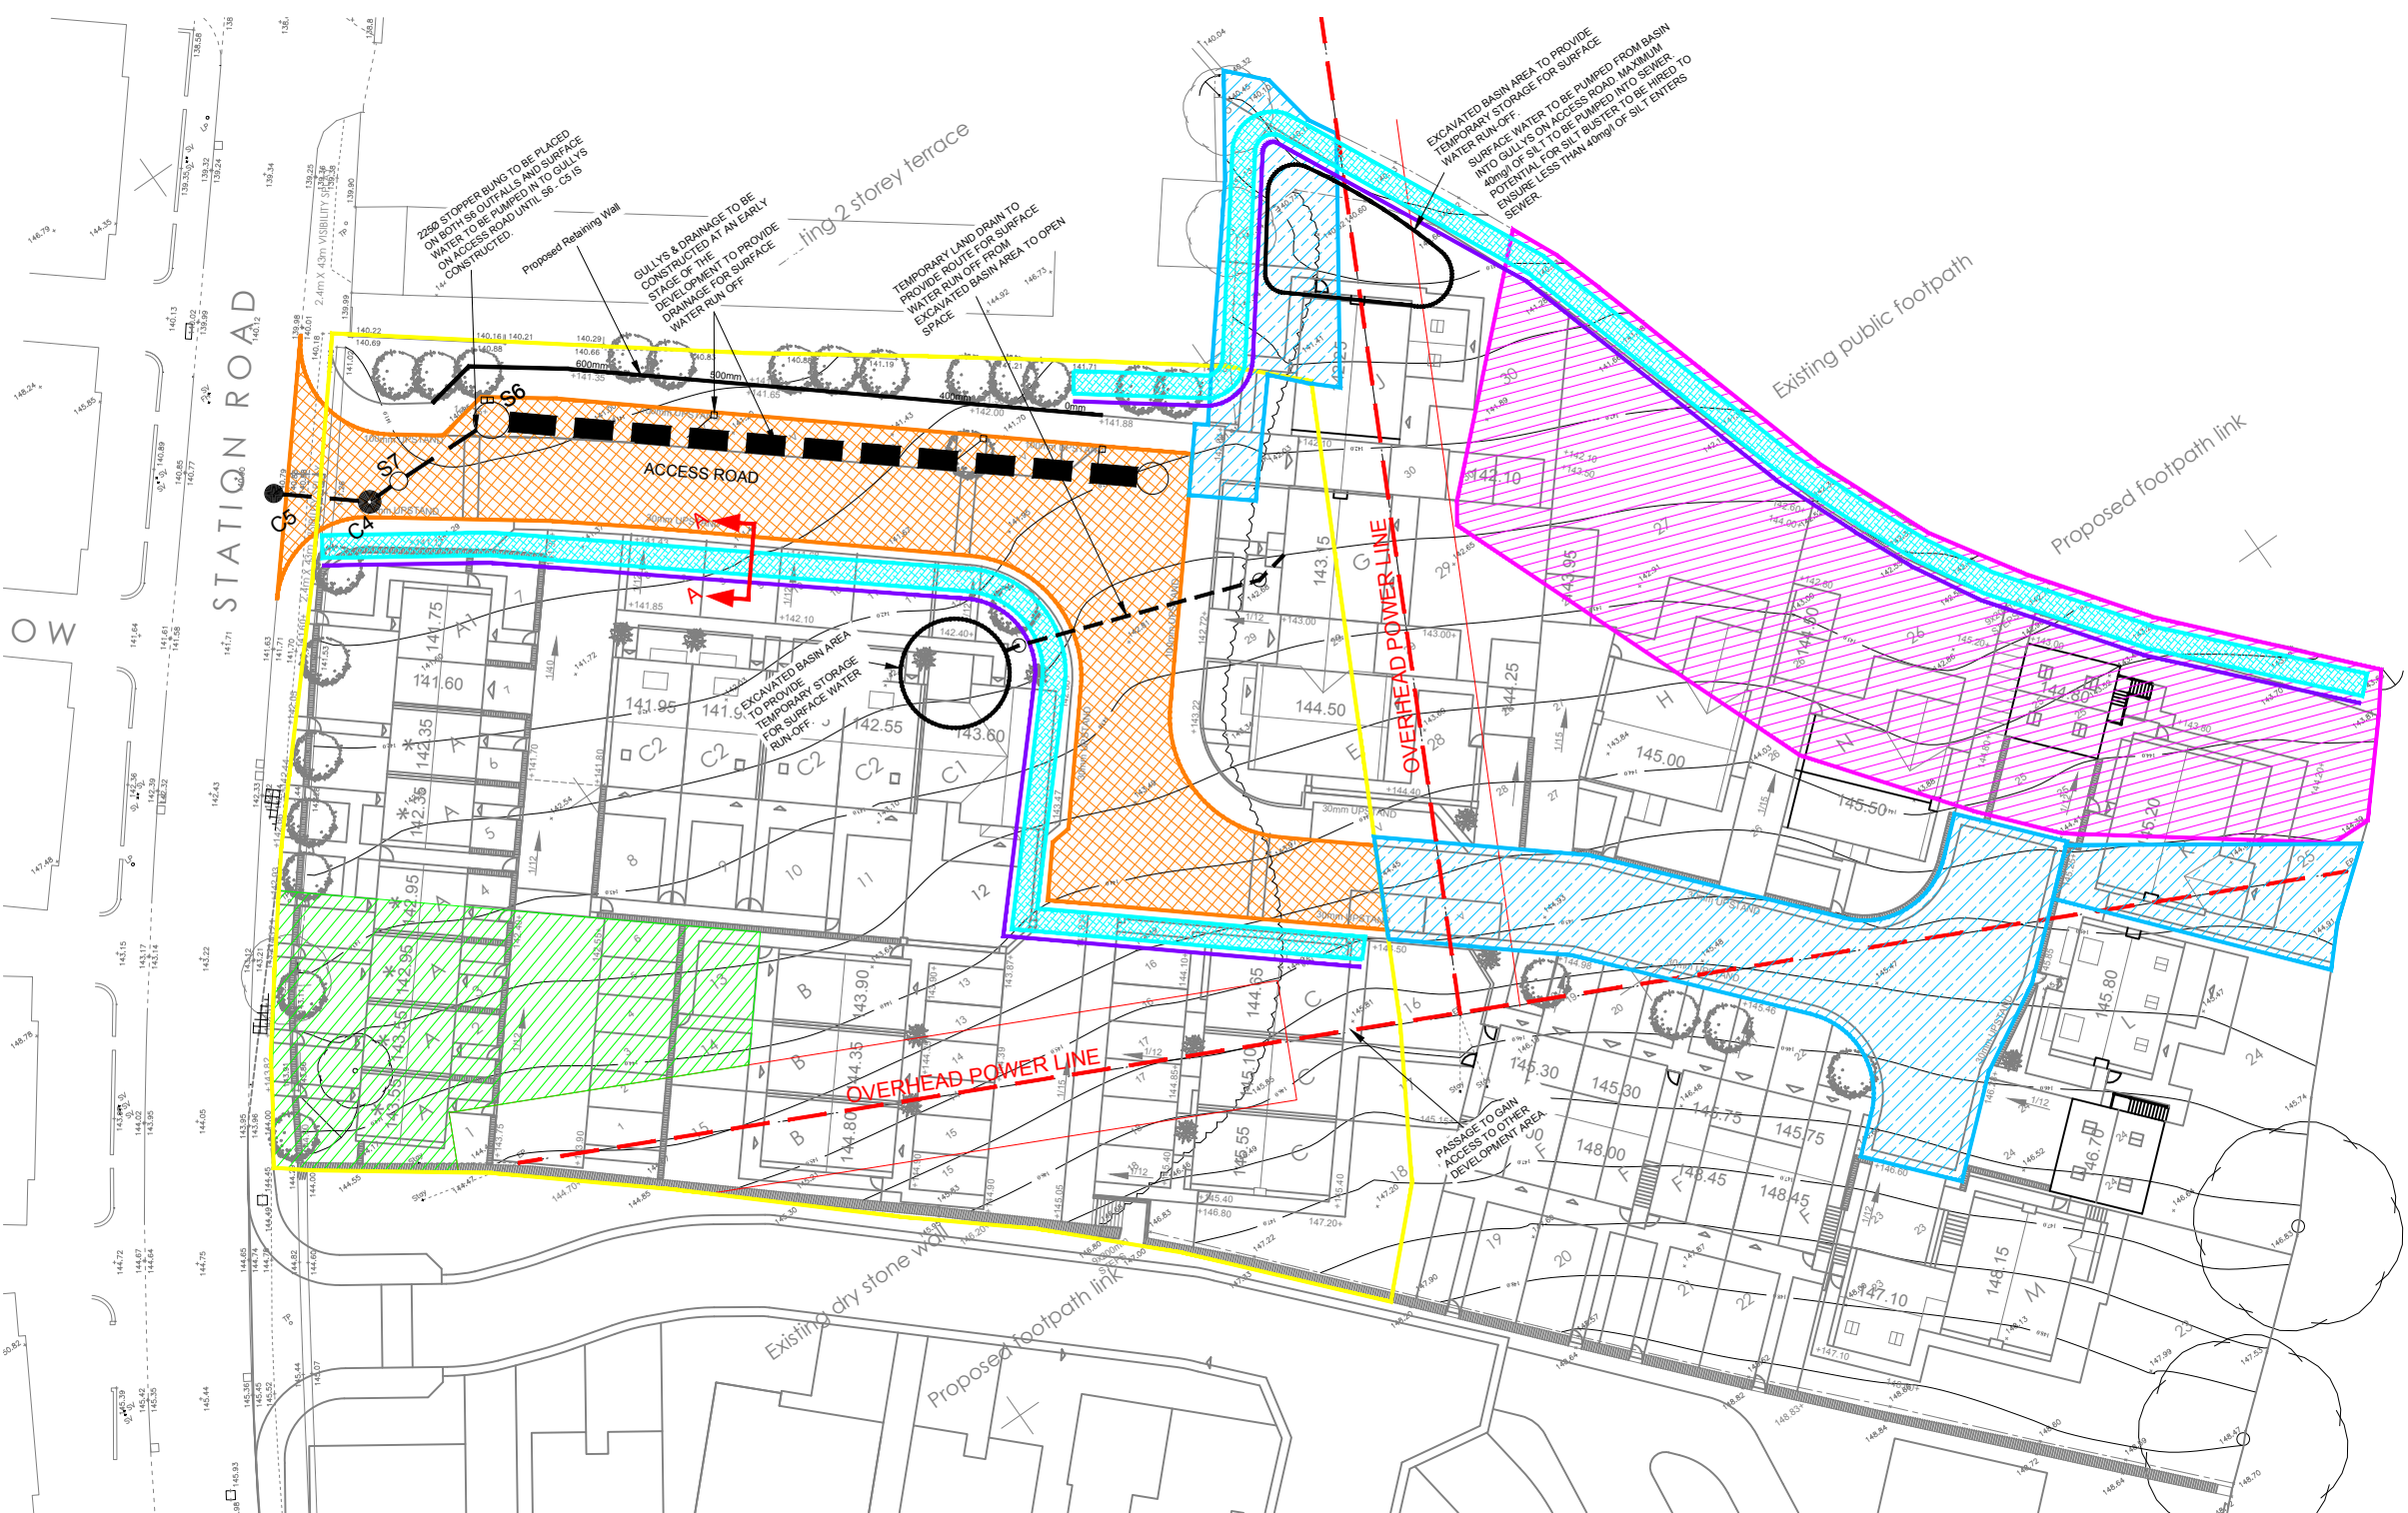


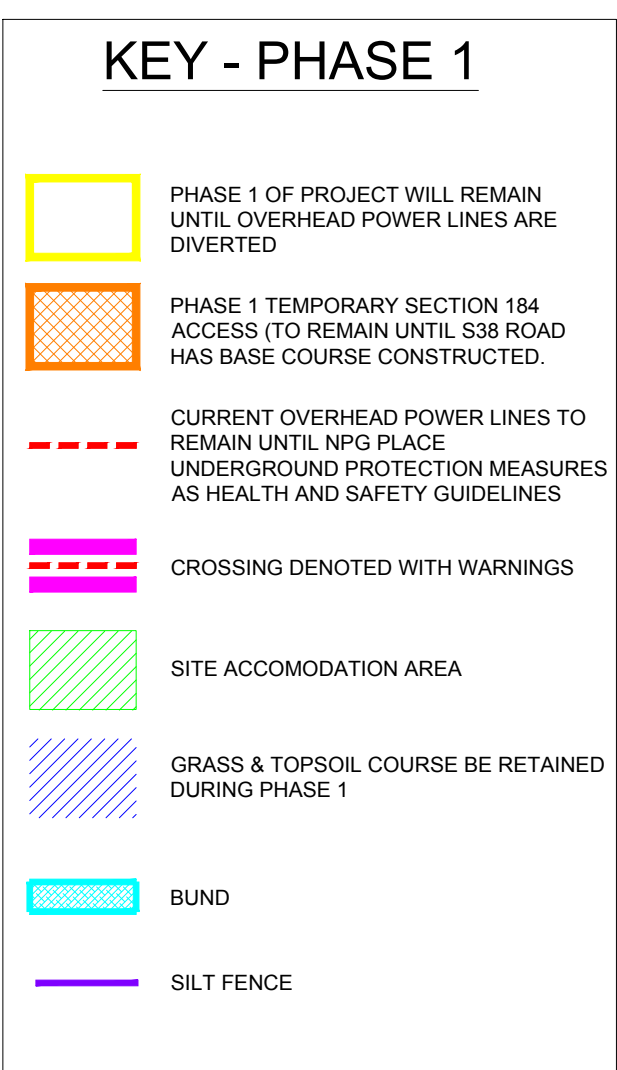



PHASE 1 - SCALE 1:500

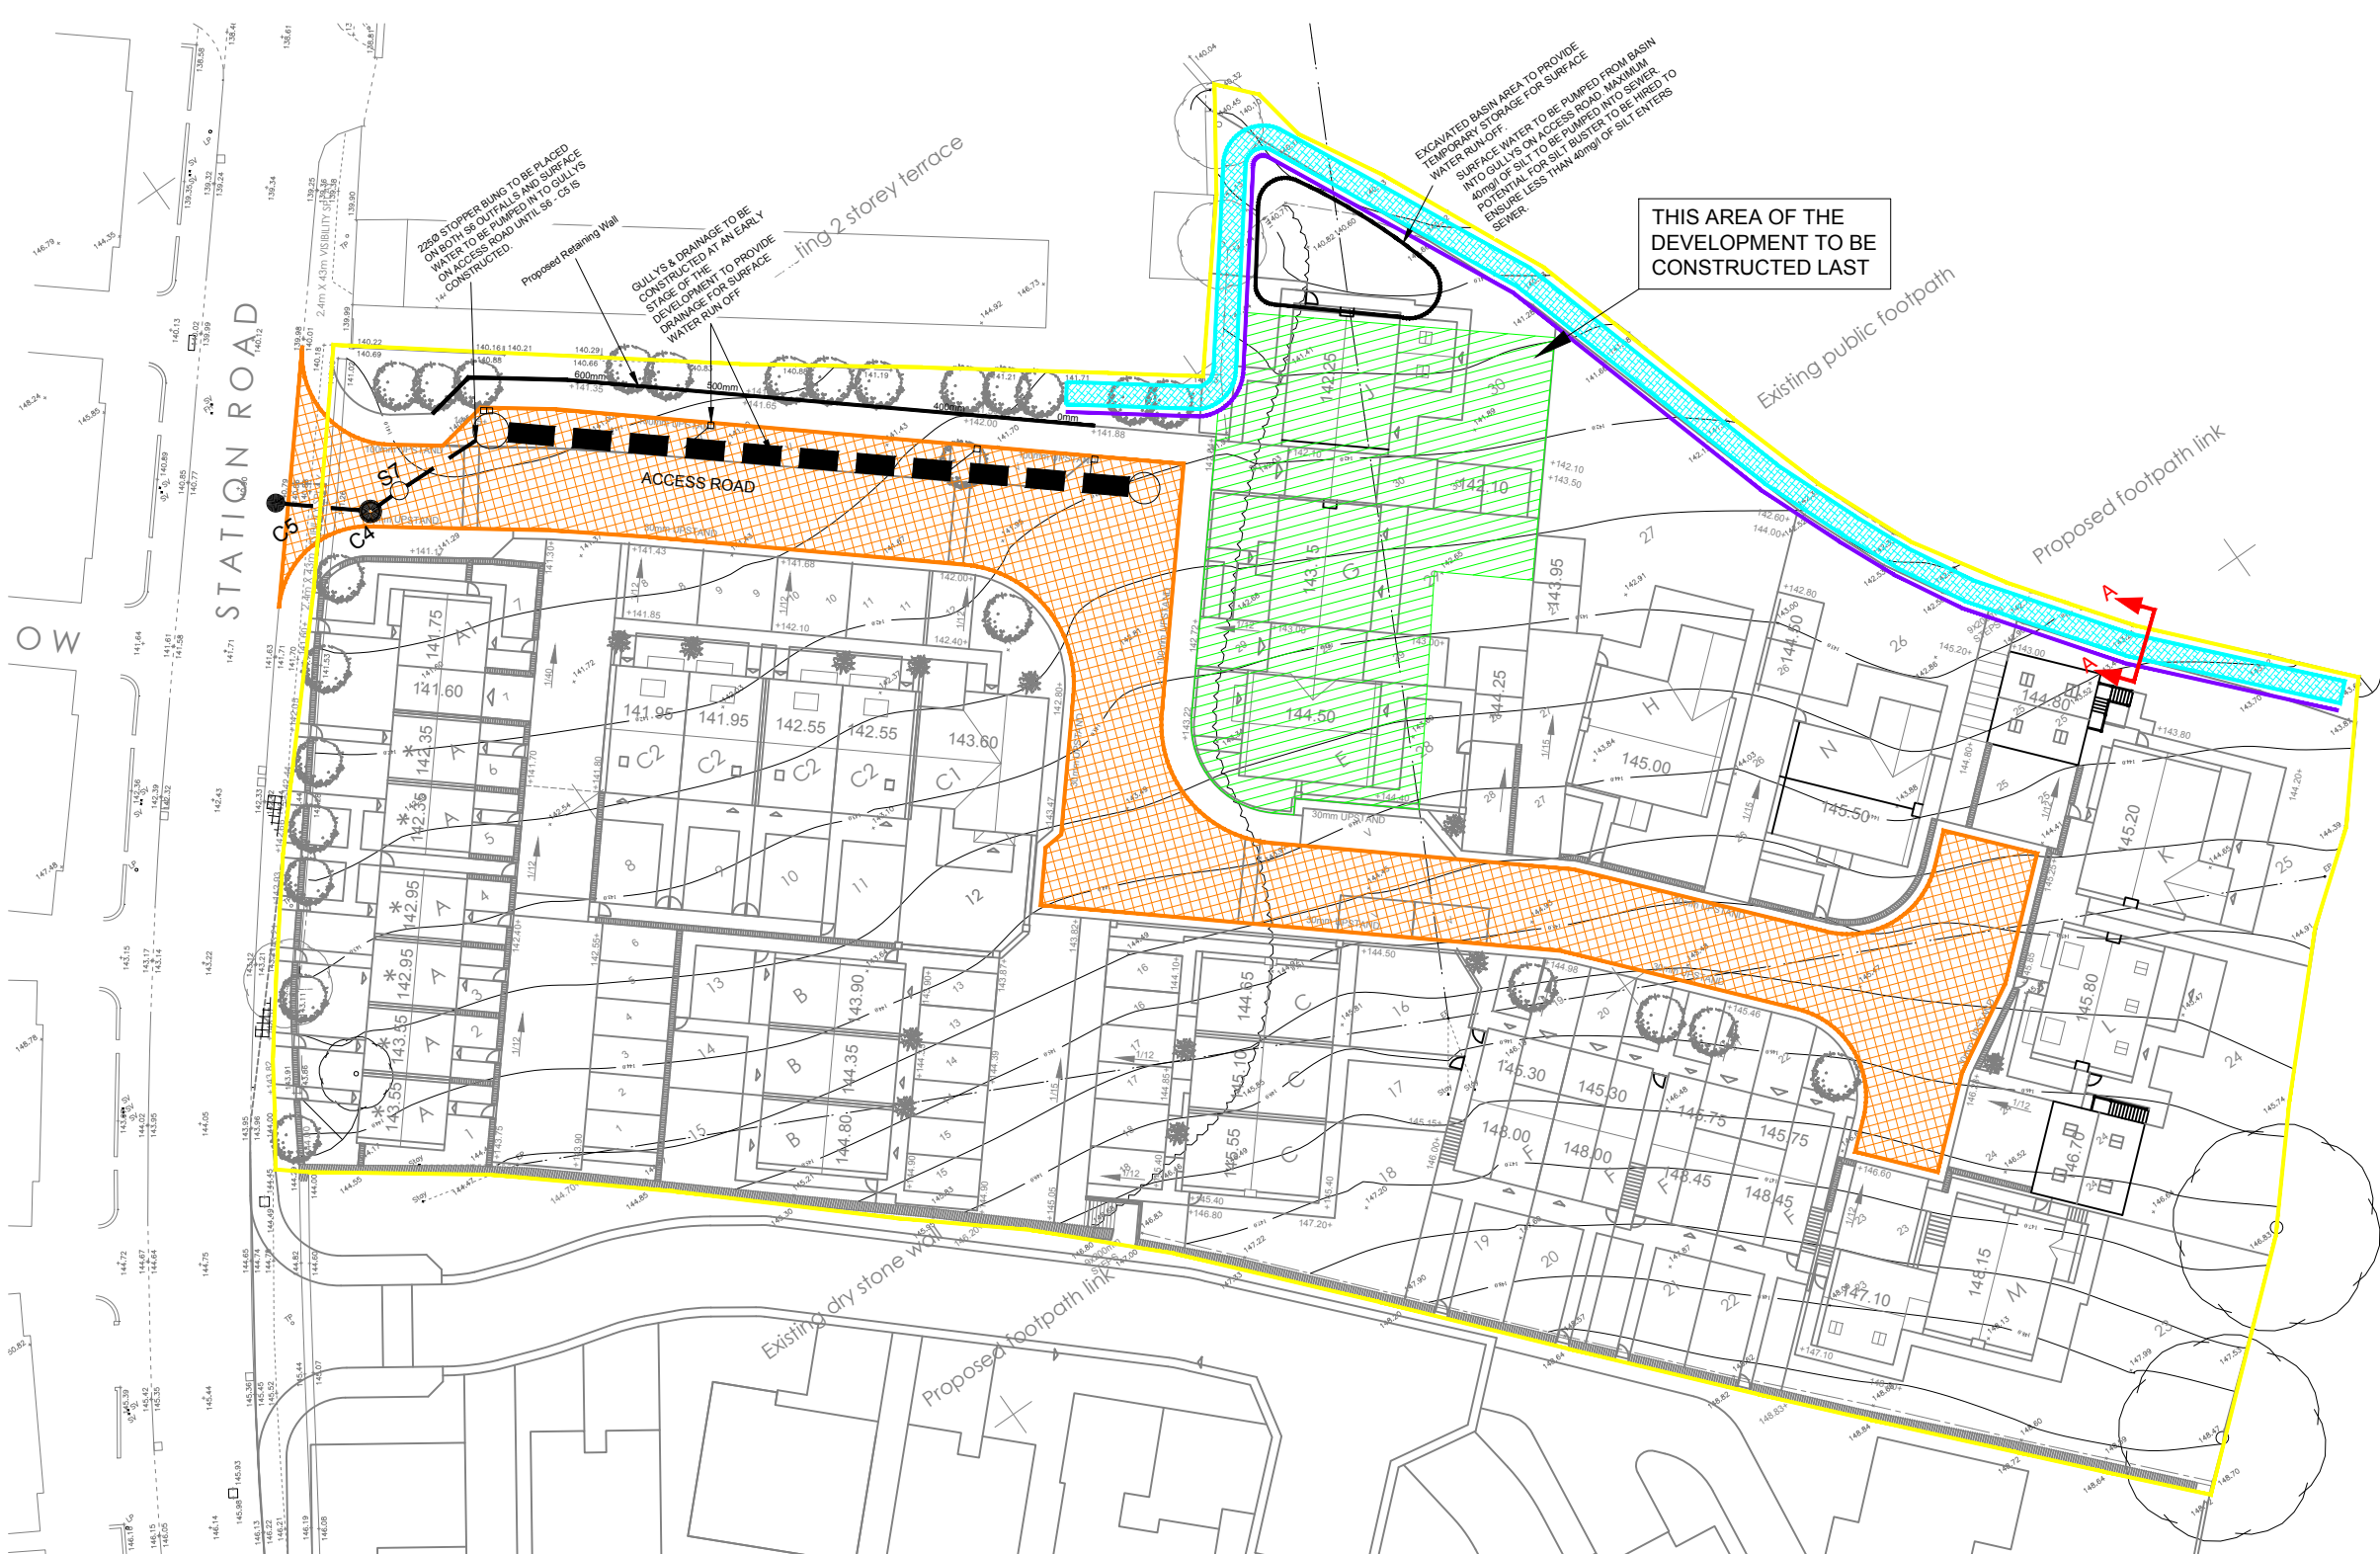


PHASE 1A - SCALE 1:500

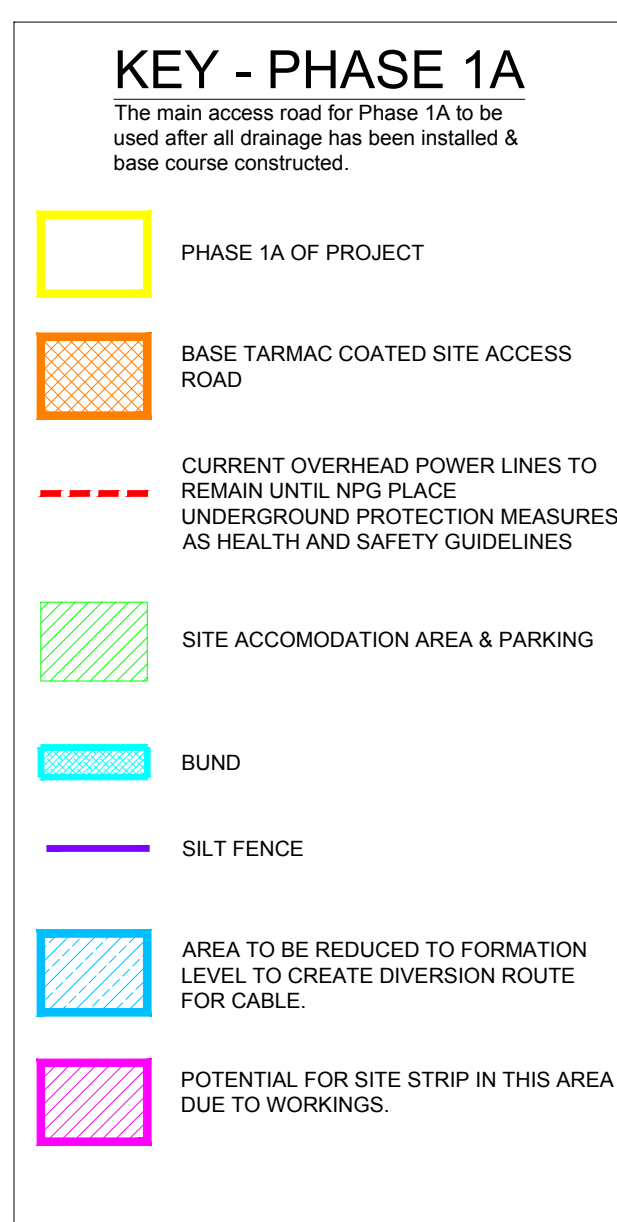

PHASE 2 - SCALE 1:500

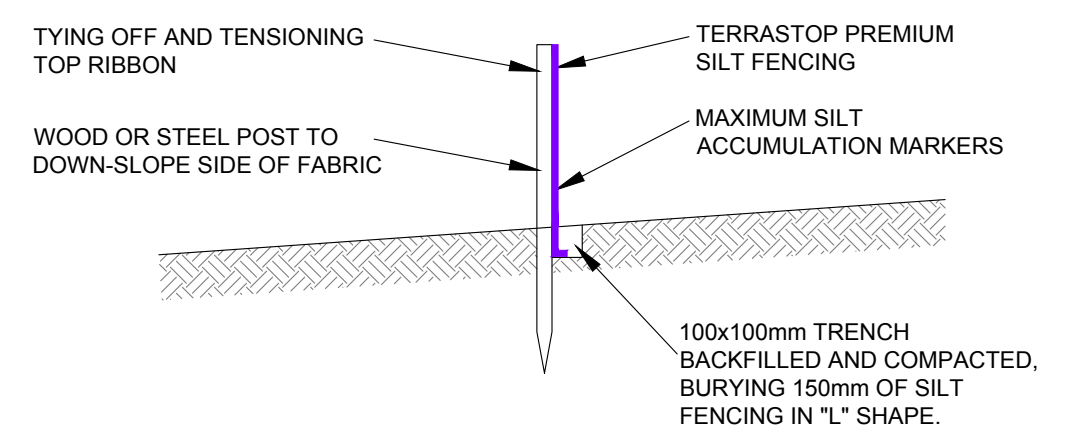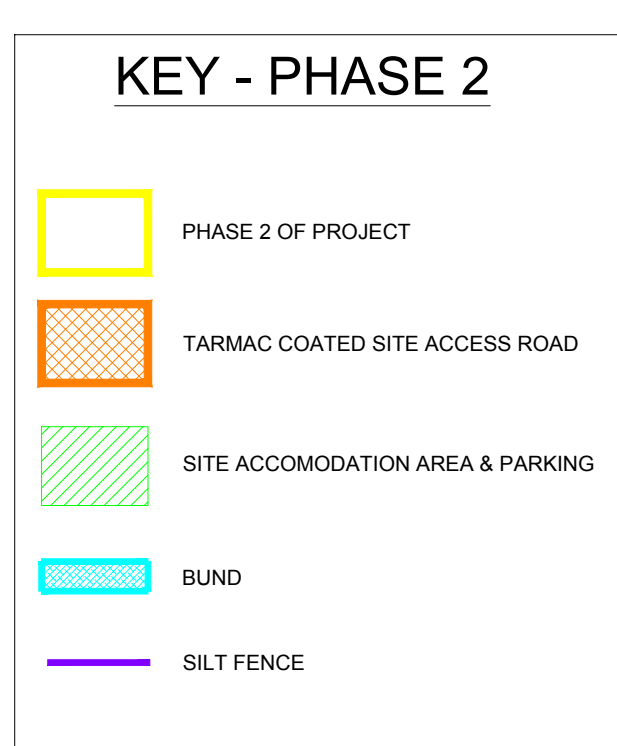

TYPICAL SECTION THRO' HY-TEX TERRASTOP SILT FENCING Scale 1:25

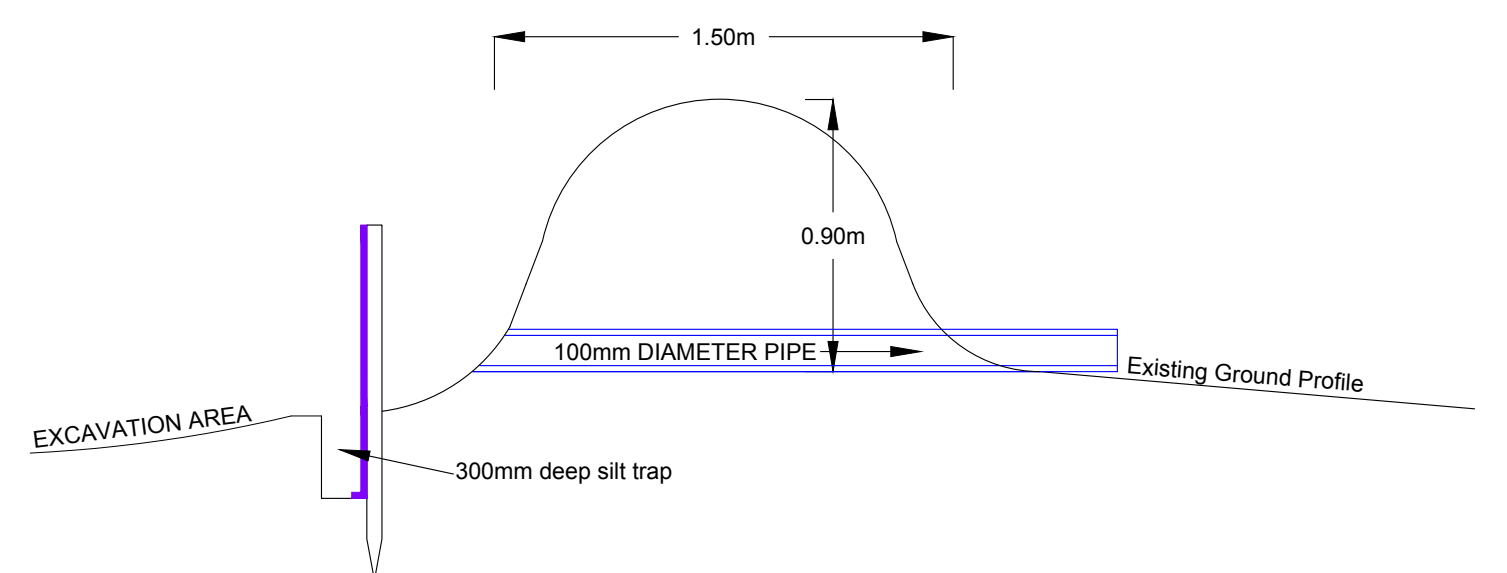

SECTION A-A THRO' PROPOSED BUND INC SILT FENCE Scale 1:50

EXISTING GULLIES TO BE FILLED WITH SILT SCREENS PROVIDED TO PREVENT SILT TRANSPORTATION. WEEKLY INSPECTION AND MAINTENANCE REQUIRED.


SURFACE WATER MANAGEMENT PLAN TO BE REASSESSED BEFORE EACH BUILD ROUTE.

WHEEL WASHING FACILITY TO BE PROVIDED AT SITE ENTRANCE TO PREVENT SILT TRANSPORTATION FROM SITE .

MAINTENANCE AND INSPECTION TO BE CARRIED OUT:
1) ON A WEEKLY BASIS
2) FOLLOWING A HEAVY RAINFALL
3) PRIOR TO A FORECAST HEAVY RAIN

LOGS TO BE PRODUCED AND ANY REMEDIAL WORKS NOTED THROUGHOUT TEMPORARY WORKS.

PUMP TO BE PROVIDED ON STAND BY IN CASE OF FAILURE TO TEMPORARY DRAINAGE WORKS. i.e. EXCESSIVE SURFACE WATER BUILD UP DURING EXTREME STORM EVENTS IN TEMPORARY BASINS & ON-SITE. EMERGENCY CONTACT NUMBER TO BE PROVIDED AT ALL TIMES.

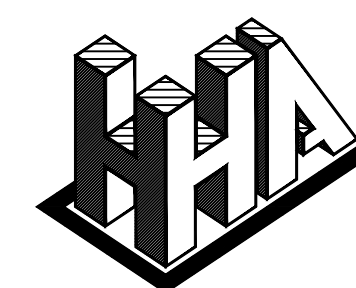

Haigh Huddleston & Associates

Civil Structural Engineering Consultants

Firth Buildings, 99 - 101 Leeds Rd, Dewsbury, WF12 7BU t 01924 464342 f 01924 450662
e trevor.haigh@haighhuddleston.co.uk

Client
YORKSHIRE COUNTRY PROPERTIES

Project
STATION ROAD, SKELMANTHORPE

Detail
SURFACE WATER MANAGEMENT PLAN

Dwn JF Chkd MH Date JUN-21 Scale 1:500@A1 Dwg No. E18/7366/042