


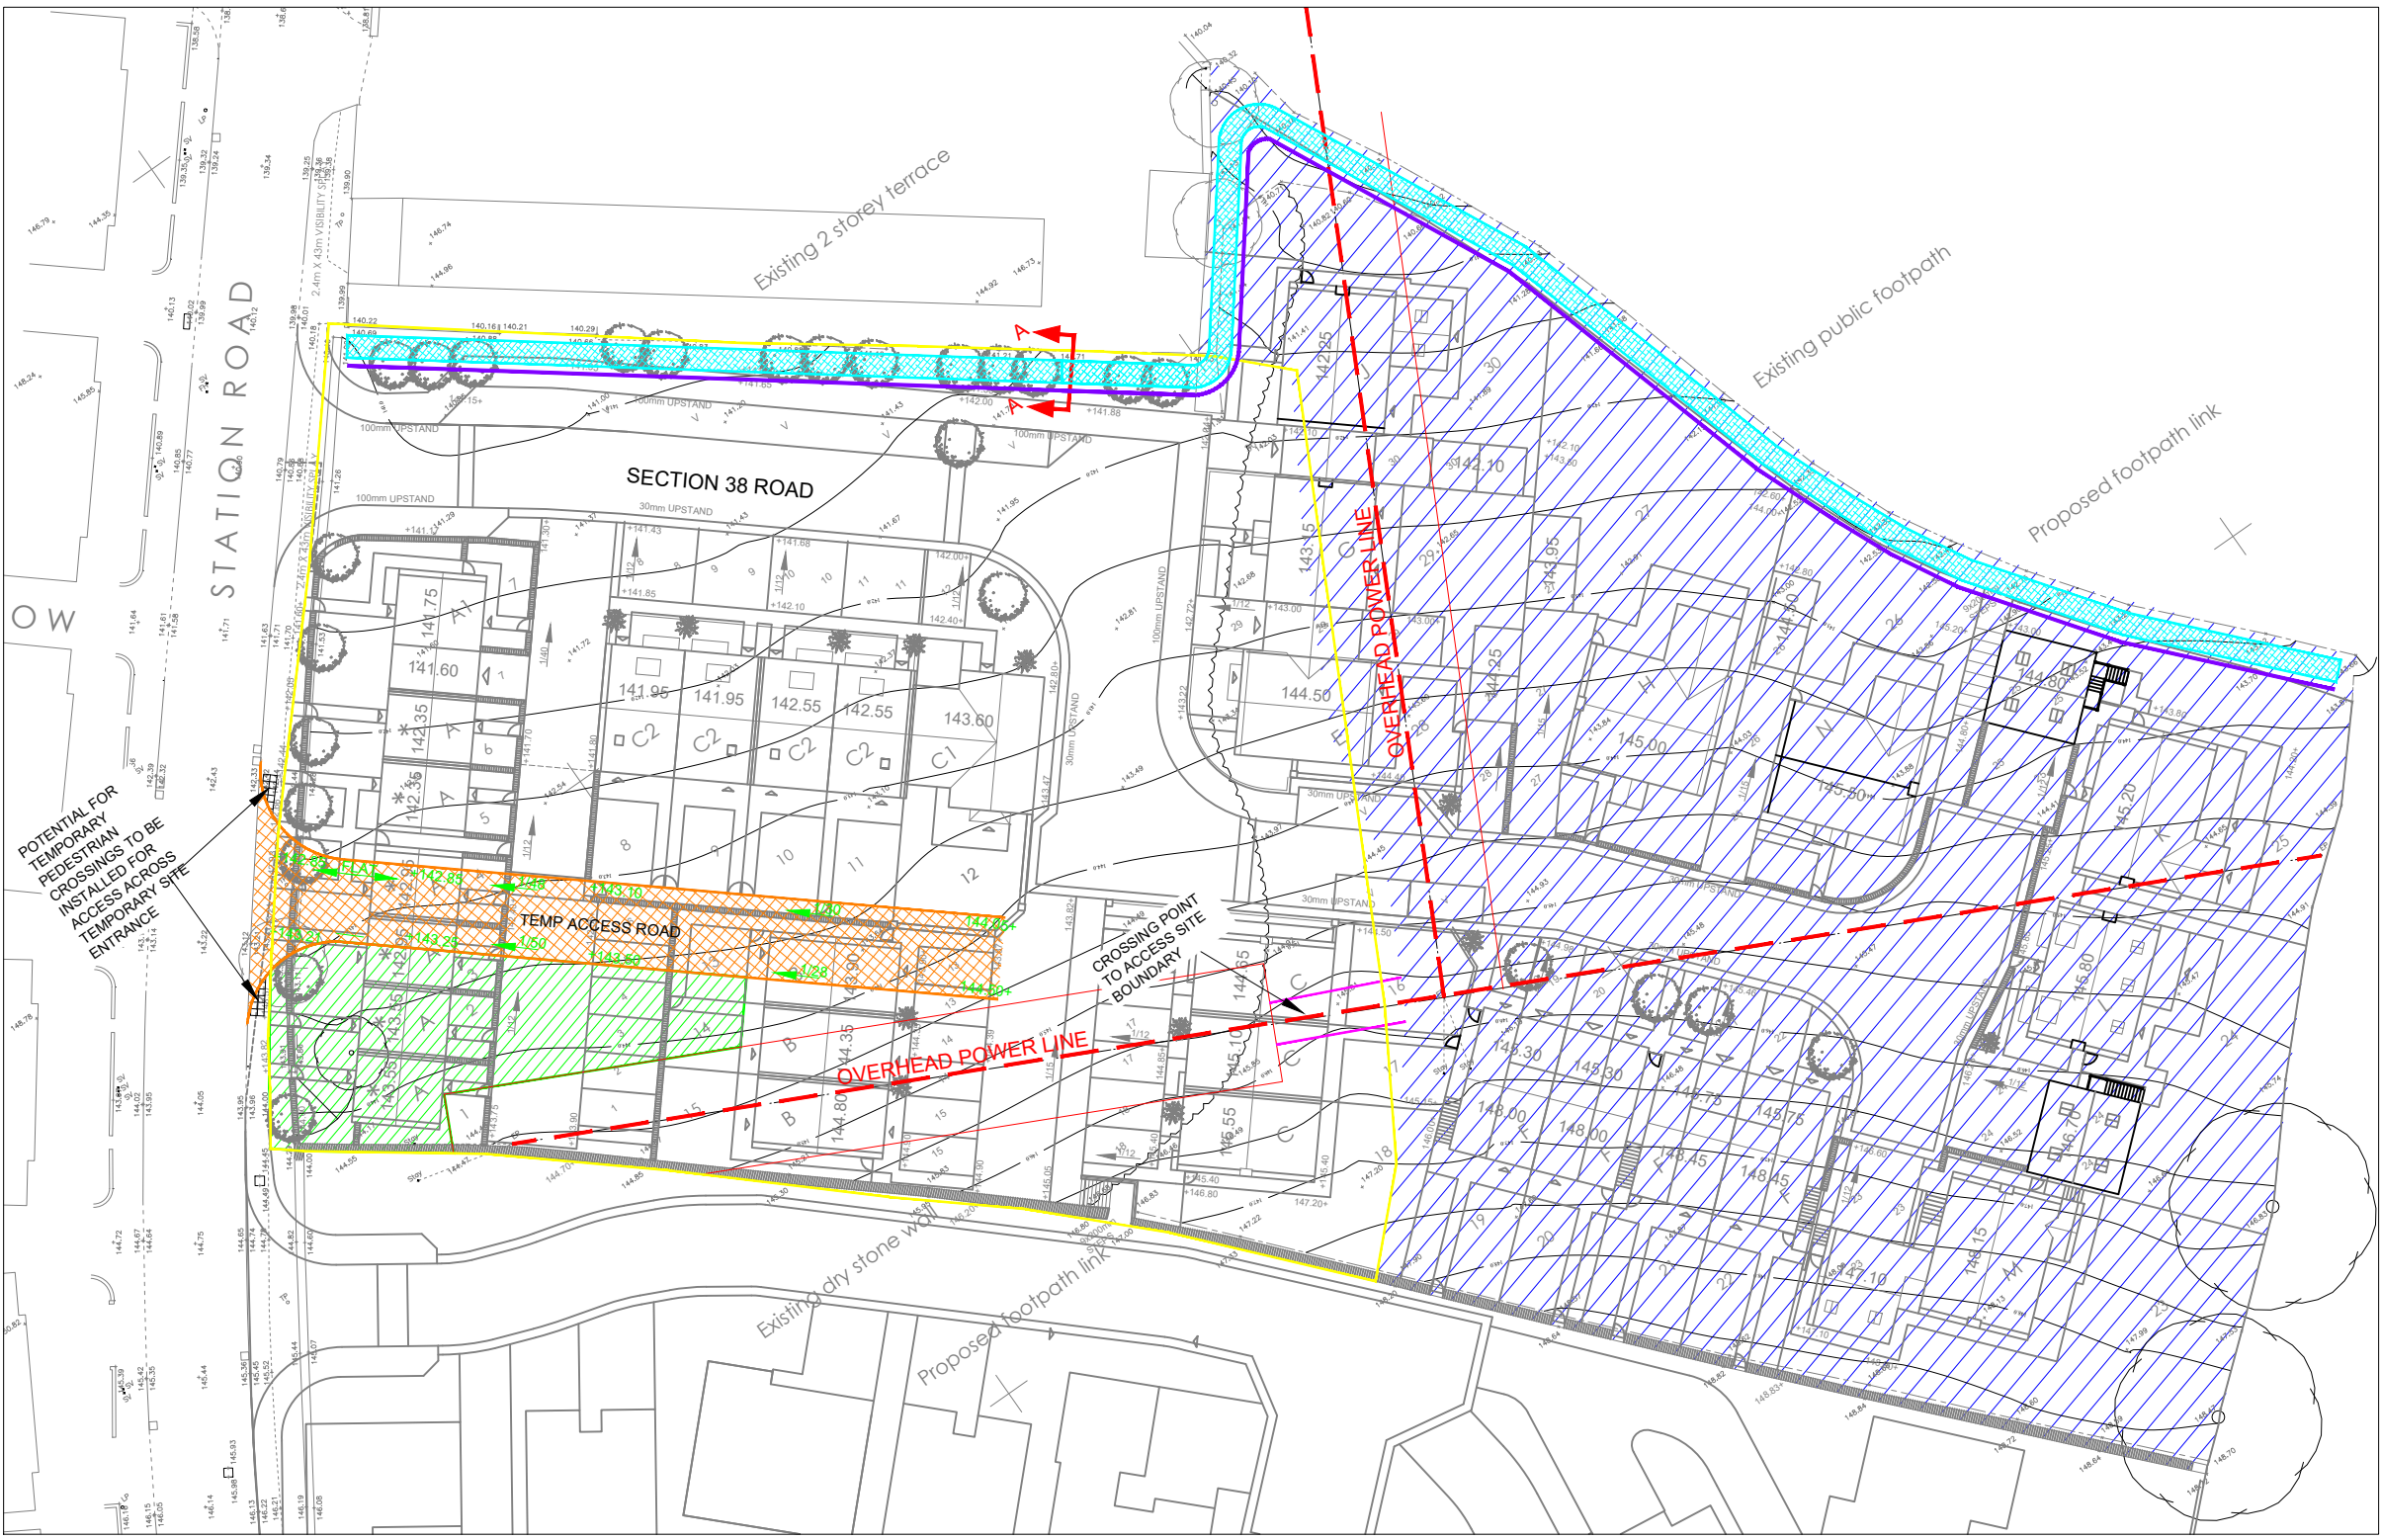


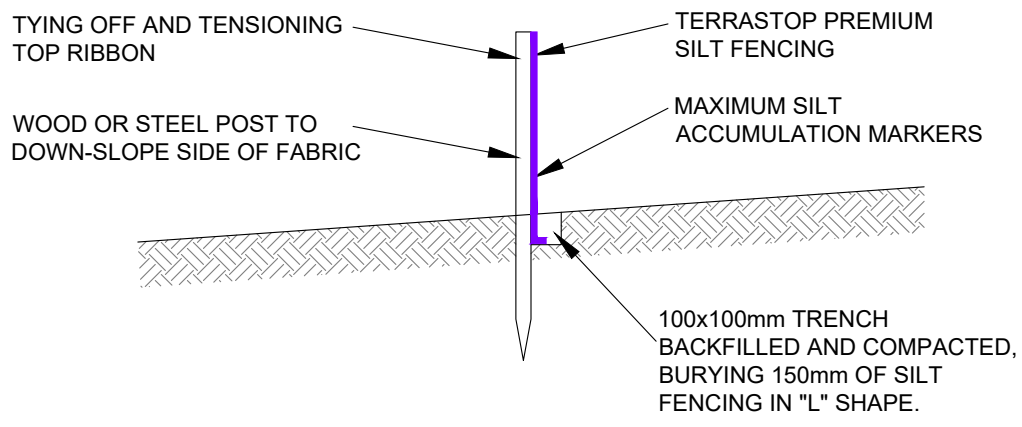


PHASE 1 - SCALE 1:500

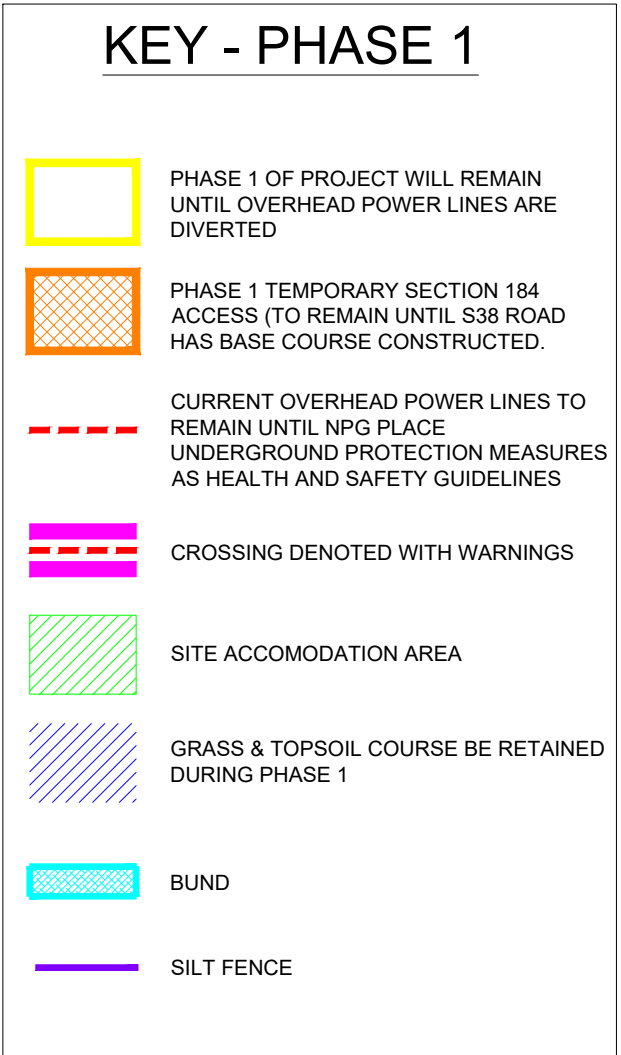



TYPICAL SECTION THRO' HY-TEX TERRASTOP SILT FENCING Scale 1:25

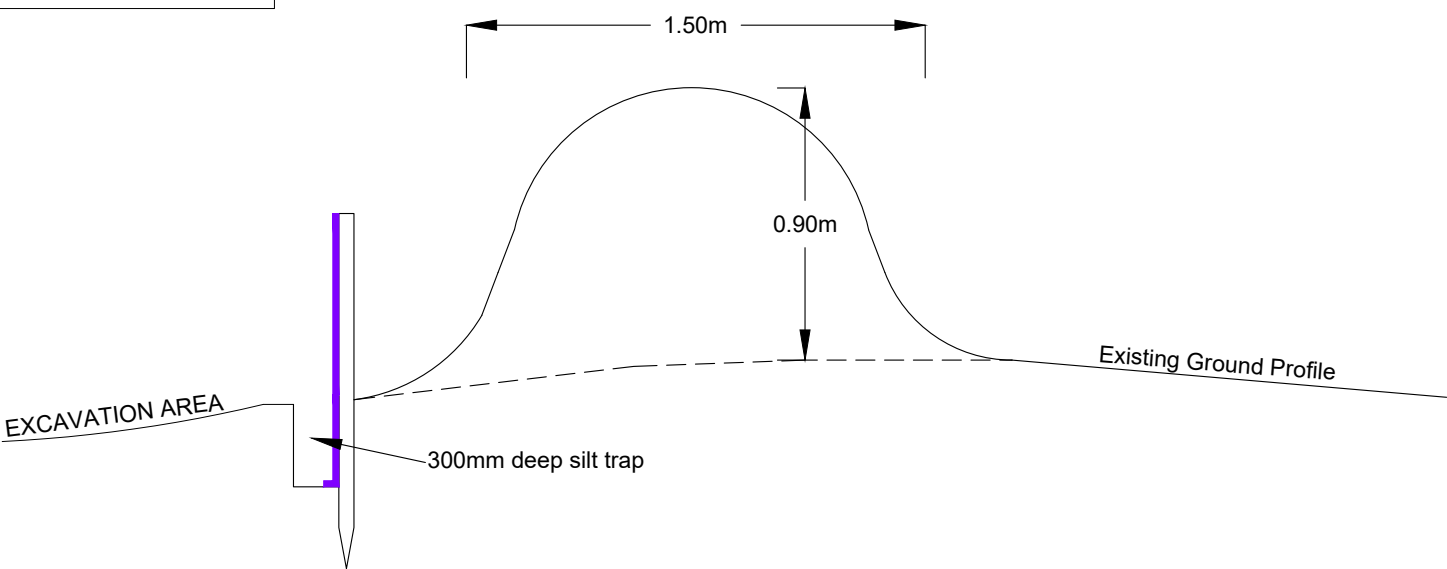


SECTION A-A THRO' PROPOSED BUND INC SILT FENCE Scale 1:50

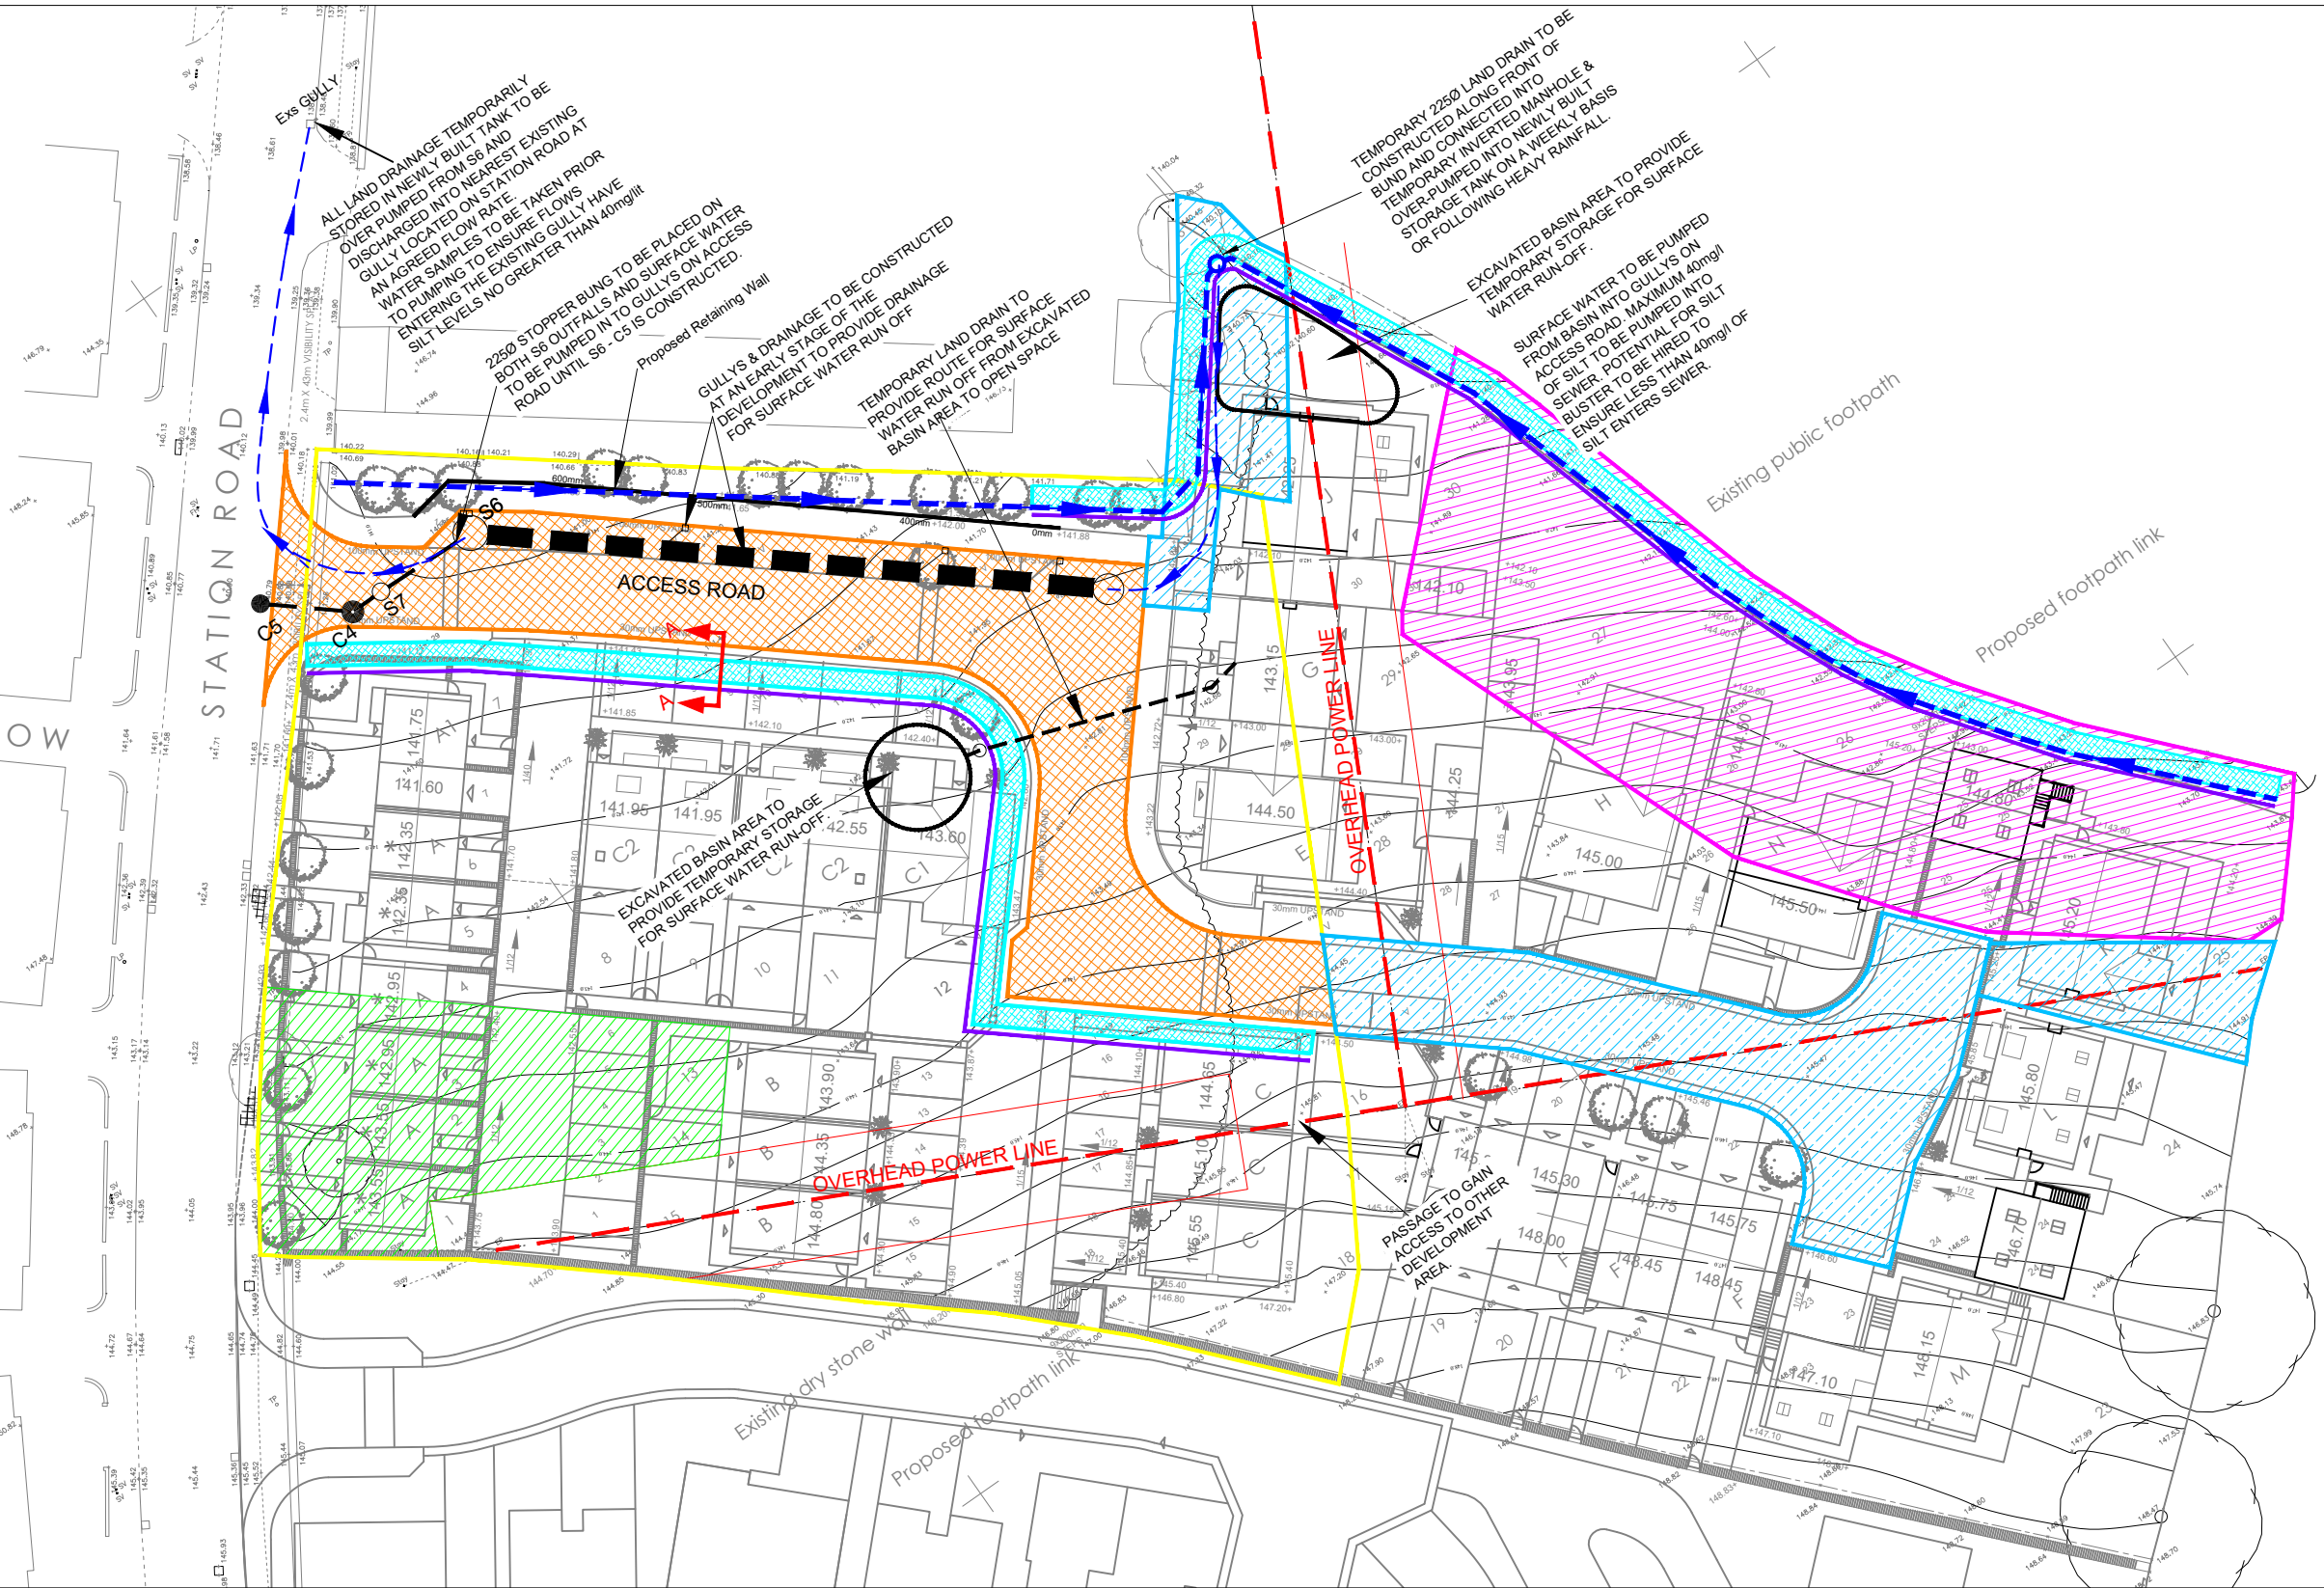


PHASE 1A - SCALE 1:500

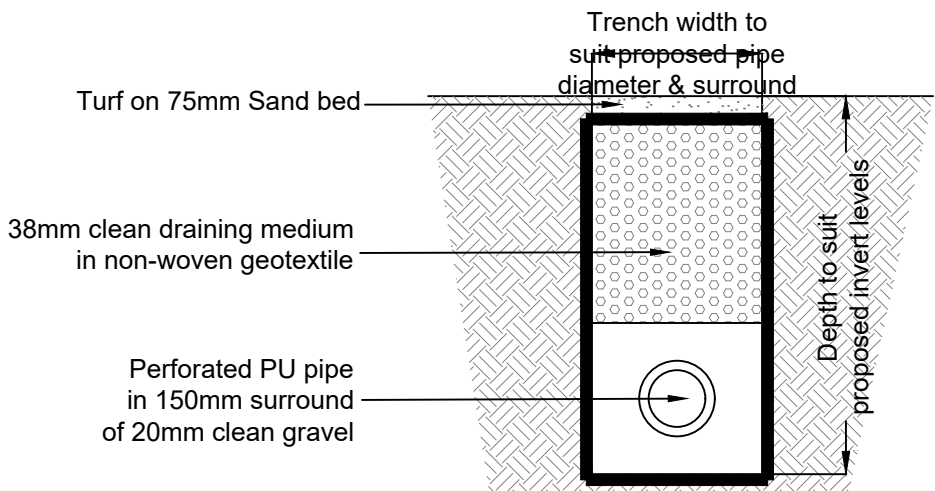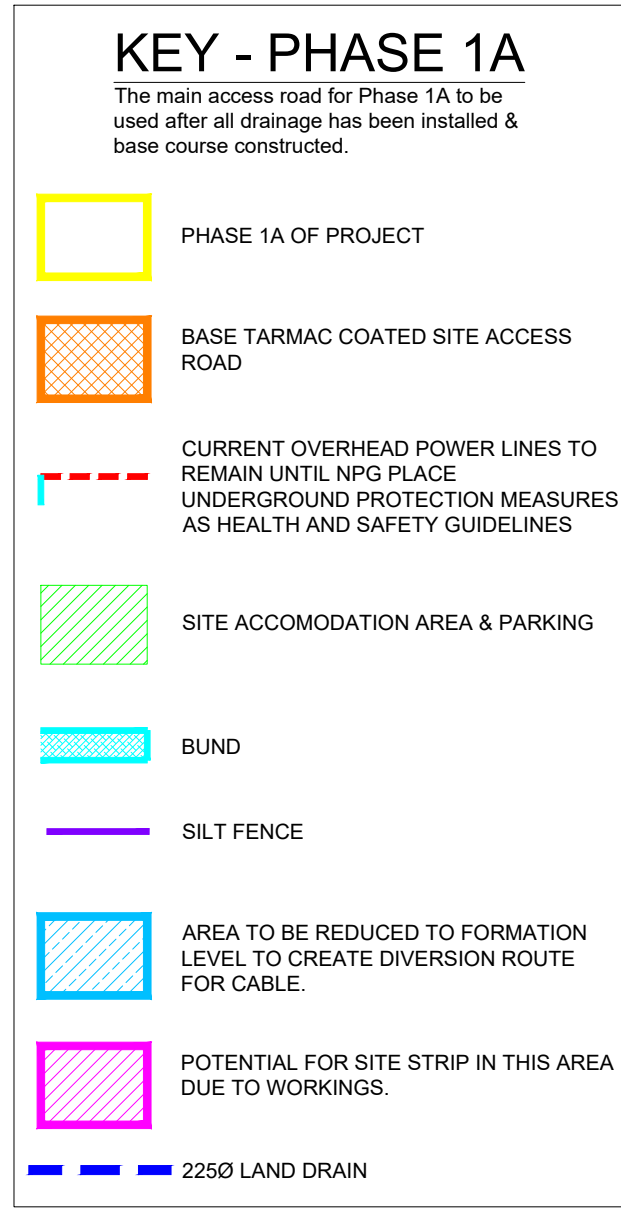

TYPICAL SECTION THRO' LAND DRAIN

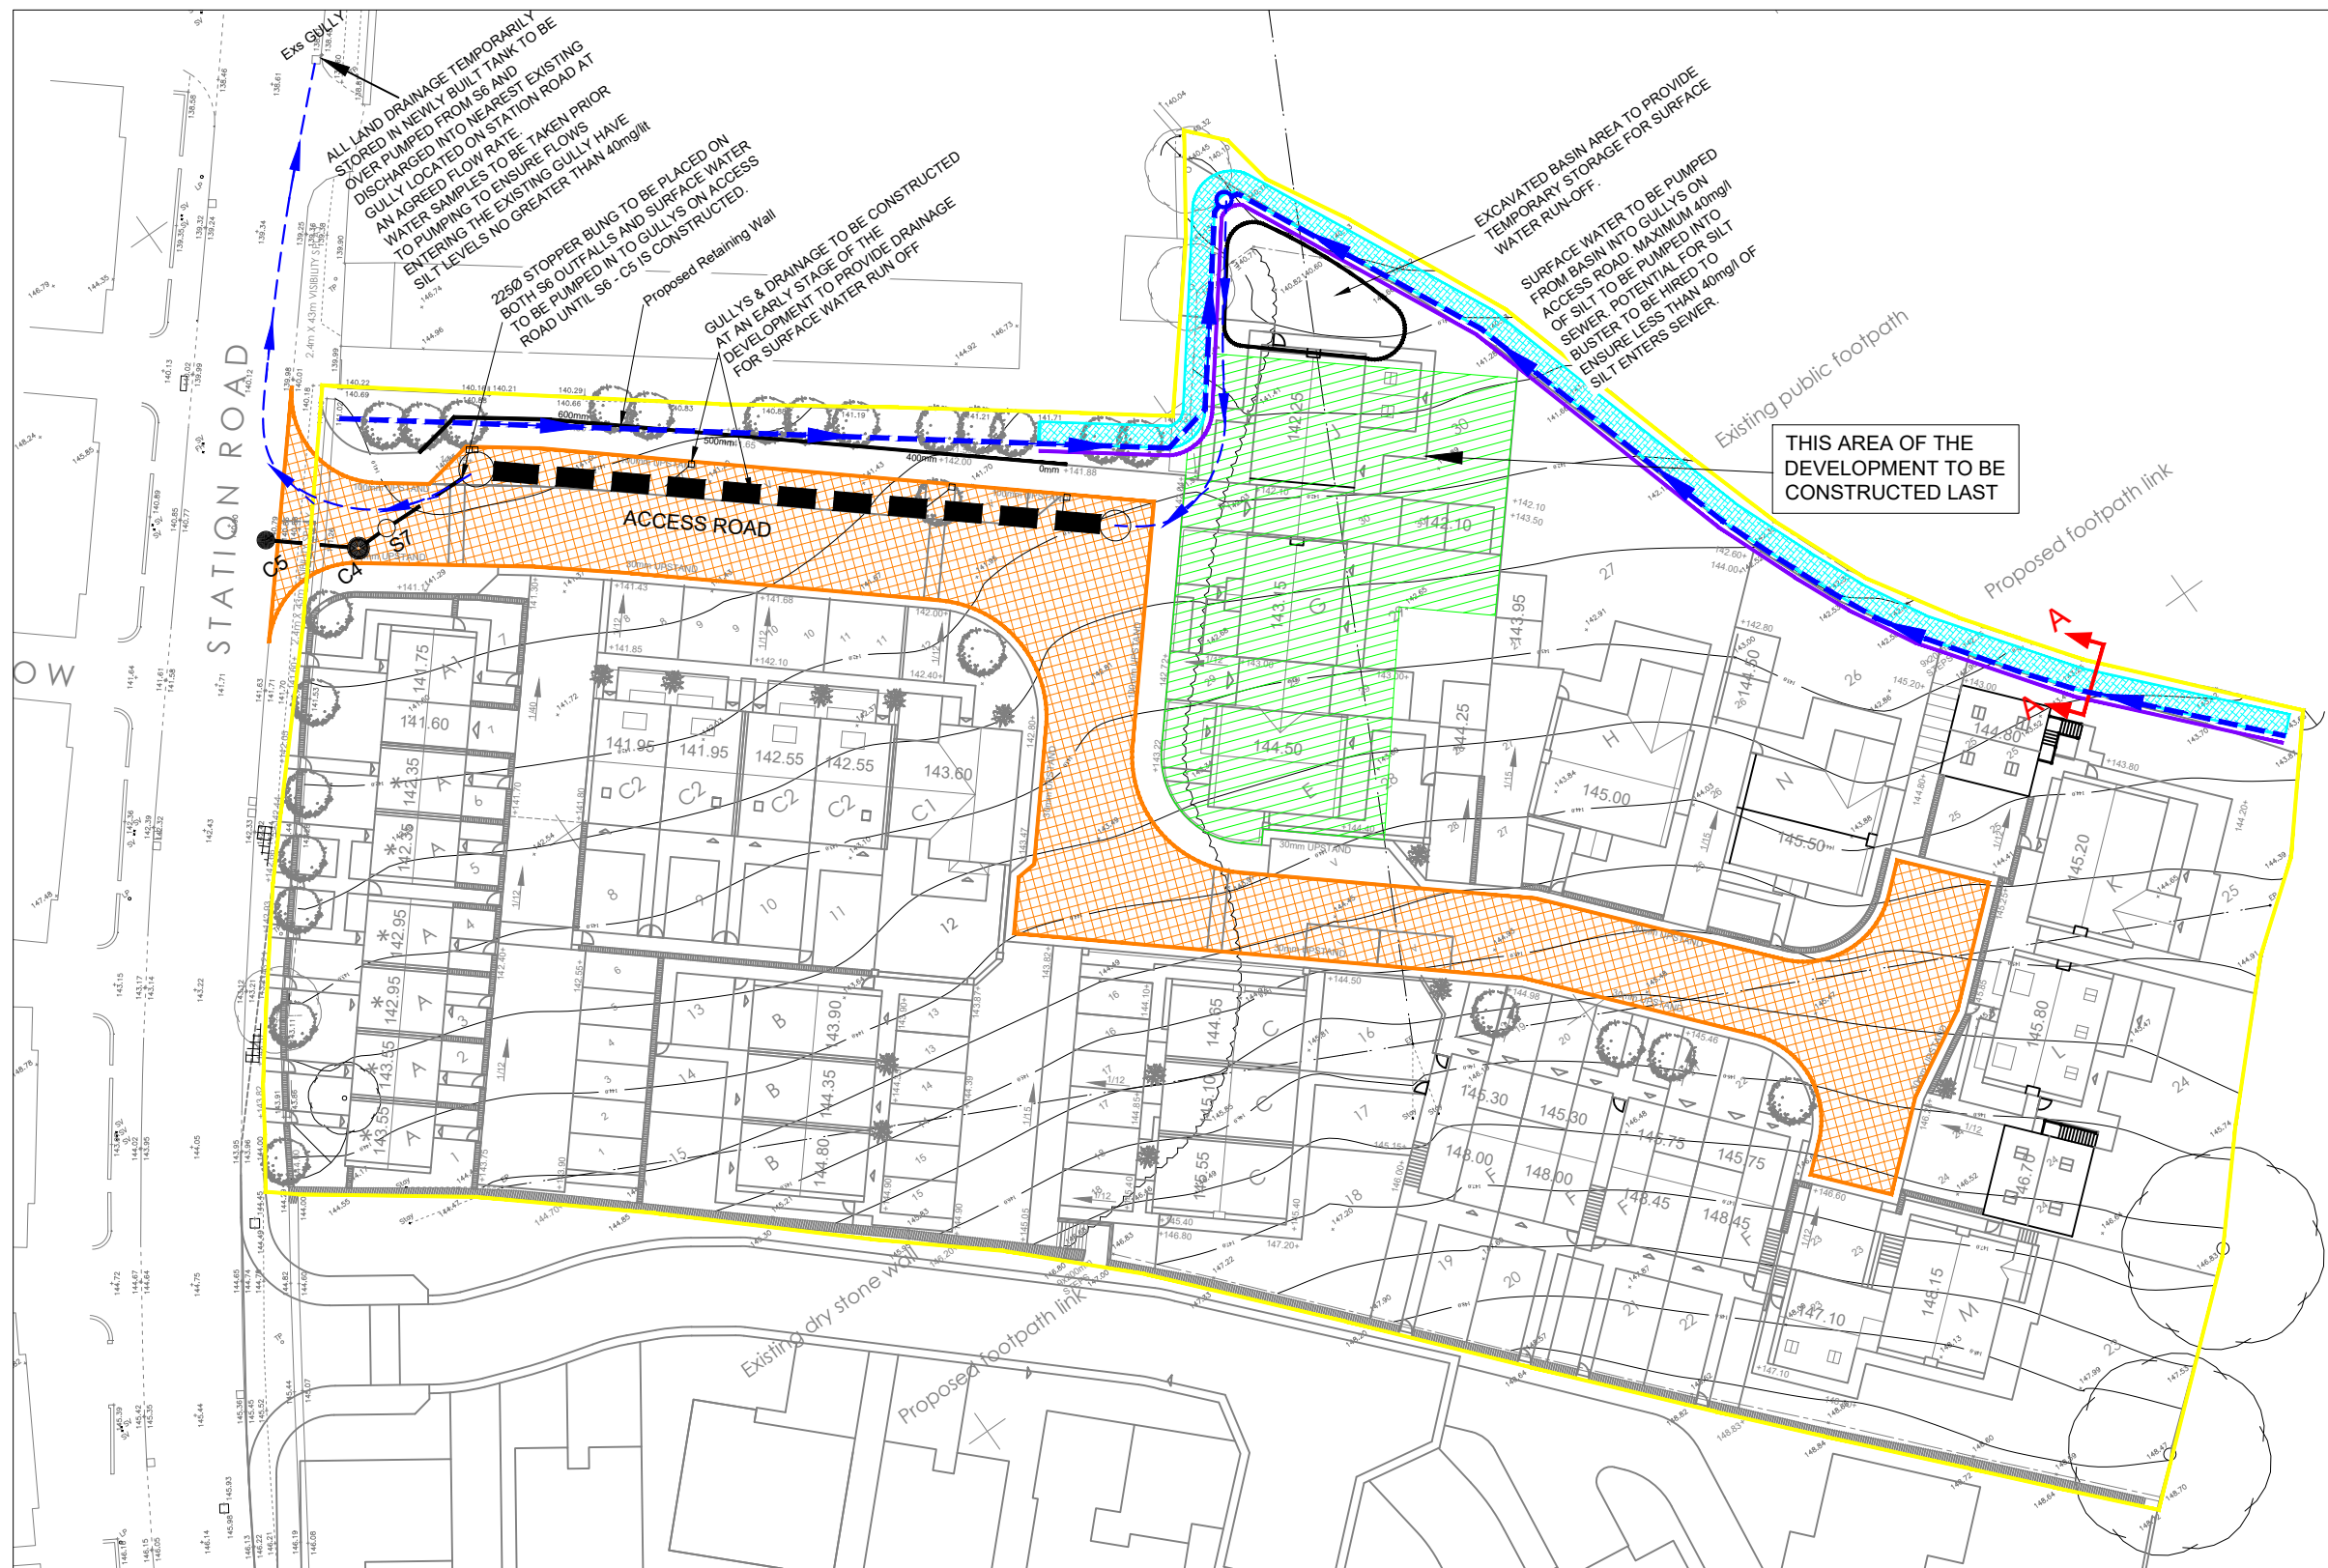

PHASE 2 - SCALE 1:500

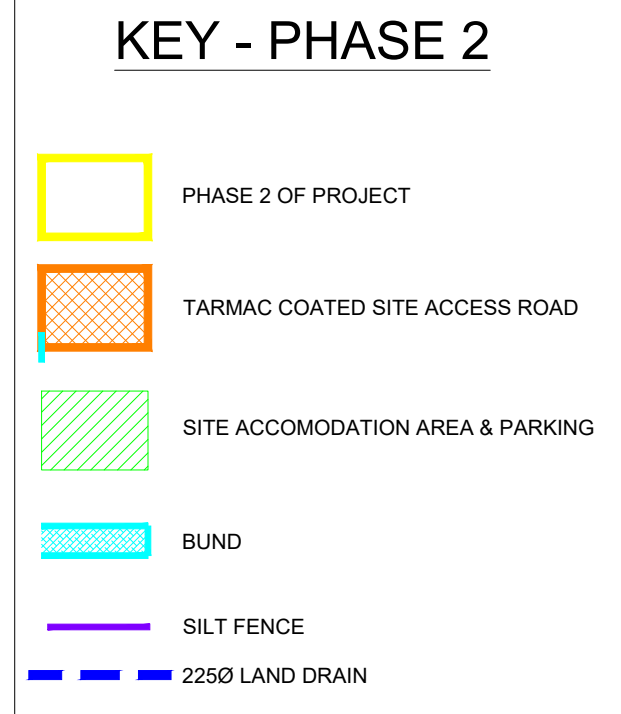

EXISTING GULLIES TO BE FILLED WITH SILT SCREENS PROVIDED TO PREVENT SILT TRANSPORTATION. WEEKLY INSPECTION AND MAINTENANCE REQUIRED.

SURFACE WATER MANAGEMENT PLAN TO BE REASSESSED BEFORE EACH BUILD ROUTE.

WHEEL WASHING FACILITY TO BE PROVIDED AT SITE ENTRANCE TO PREVENT SILT TRANSPORTATION FROM SITE .

MAINTENANCE AND INSPECTION TO BE CARRIED OUT:
1) ON A WEEKLY BASIS
2) FOLLOWING A HEAVY RAINFALL
3) PRIOR TO A FORECAST HEAVY RAIN

LOGS TO BE PRODUCED AND ANY REMEDIAL WORKS NOTED THROUGHOUT TEMPORARY WORKS.

PUMP TO BE PROVIDED ON STAND BY IN CASE OF FAILURE TO TEMPORARY DRAINAGE WORKS. i.e. EXCESSIVE SURFACE WATER BUILD UP DURING EXTREME STORM EVENTS IN TEMPORARY BASINS & ON-SITE. EMERGENCY CONTACT NUMBER: 01484 598455