




SECTION A-A THRO' PROPOSED BUND
Scale 1:25

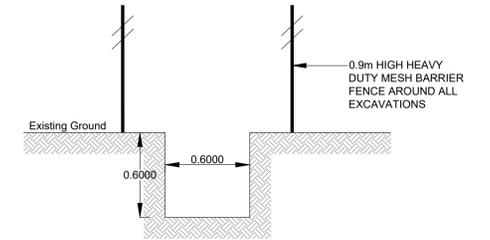


TYPICAL SECTION THRO' TEMPORARY DRAINAGE TRENCH
Scale 1:25

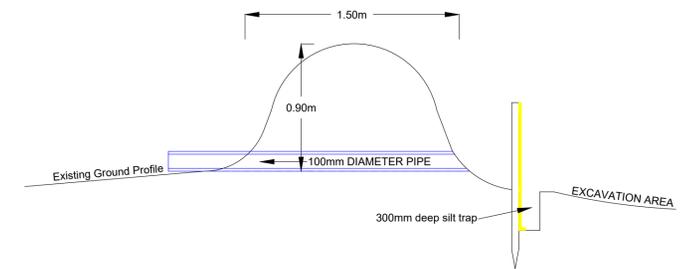

SECTION B-B THRO' PROPOSED BUND INC STRAW BALES
Scale 1:25

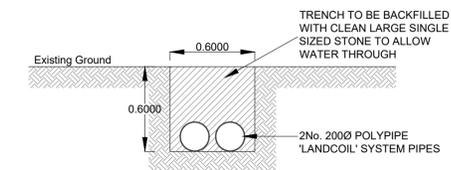

TYPICAL SECTION THRO' TEMPORARY DRAINAGE TRENCH AT VEHICLE CROSSINGS
Scale 1:25

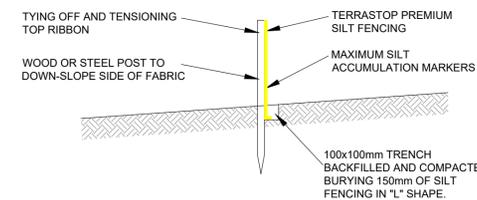

TYPICAL SECTION THRO' HY-TEX TERRASTOP SILT FENCING
Scale 1:25

TOPSOIL AND GRASS TO REMAIN IN-SITU WHERE POSSIBLE TO LIMIT RUNOFF AND SILT TRANSPORTATION UNTIL REFERENCED IN HHA TEMPORARY SURFACE WATER MANAGEMENT PLAN.


MAINTENANCE AND INSPECTION TO BE CARRIED OUT:
1) ON A WEEKLY BASIS
2) FOLLOWING A HEAVY RAINFALL
3) PRIOR TO A FORECAST OF HEAVY RAINFALL.

SURFACE RUN-OFF TO BE MONITORED ON A REGULAR BASIS TO ENSURE SILT CONTENT OF WATER LEAVING SITE DOES NOT EXCEED 40mg/l IN ACCORDANCE WITH ENVIRONMENT AGENCY REQUIREMENTS WHERE DIRECT OUTFALL TO WATERCOURSE

RISK	LEVEL OF RISK (H/M)	SUGGESTED ACTION
DEEP EXCAVATIONS ASSOCIATED WITH NEW DRAINAGE WORKS	HIGH	ENSURE ALL EXCAVATIONS HAVE ADEQUATE TRENCH SUPPORTS
HANDLING LARGE DIAMETER MANHOLE RINGS AND CIRCULAR PIPES	HIGH	USE CORRECT LIFTING EQUIPMENT AND ENSURE OPERATIVES WEAR APPROPRIATE PROTECTIVE CLOTHING/HARD HAT/CORRECT PPE
CONTACT WITH SEWAGE	MED	OPERATIVES TO USE CORRECT BREATHING EQUIPMENT/CORRECT PPE
NOISE	MED	OPERATIVES TO USE CORRECT EAR PROTECTION/CORRECT PPE
DRAINAGE EXCAVATIONS ADJACENT EXISTING BOUNDARY STRUCTURES AND BUILDINGS WHERE REQUIRED	HIGH	ENSURE CORRECT SUPPORTS ARE PROVIDED TO TRENCHES AND SHIELDS WHERE REQUIRED
DRAINAGE EXCAVATION IN PUBLIC HIGHWAY	HIGH	ENSURE CORRECT USE OF TRENCH SUPPORTS IN EXCAVATION AND SHIELDS BARRIERS TO PROTECT MEMBERS OF THE PUBLIC
MAINTAIN ACCESS TO ADJACENT PROPERTIES AND OCCUPIERS	HIGH	ENSURE WORKS ARE PROTECTED WITH BARRIERS AND SIGNS TO GUIDE THE PUBLIC AWAY FROM THE WORKS
DRAINAGE EXCAVATIONS NEAR TO EXISTING SERVICES	HIGH	ENSURE WORKS ARE PROTECTED WITH BARRIERS AND SIGNS TO GUIDE MEMBERS OF THE PUBLIC AWAY FROM THE WORKS
WORKING IN CONFINED SPACES, WORKING IN DRAINS AND MANHOLES	HIGH	CONFINED SPACES WORKING TRAINED PERSONNEL ONLY TO CARRY OUT WORKS UNDER A PERMIT TO WORK SCHEME IMPLEMENTED BY CONTRACTOR. GAS TESTING TO TAKE PLACE BEFORE ALL ENTRIES TO CONFINED SPACES
WORKING IN HIGHWAYS / RISKS FROM VEHICLE AND PLANT	HIGH	ALL WORKS TO BE SIGNED AND FENCED FROM NORMAL VEHICULAR TRAFFIC. ALL WORKERS TO WEAR HIGH VISIBILITY CLOTHING. ALL PLANT TO HAVE VISUAL AND AUDIBLE WARNING SYSTEMS
ROAD AND DRAINAGE CONSTRUCTION	HIGH	ALL EXCAVATIONS TO BE ADEQUATELY FENCED OFF AND SUPPORTED DURING CONSTRUCTION. ALL OPERATIVES TO BE TRAINED IN CORRECT METHODS OF LIFTING AND WORK IN ACCORDANCE WITH LOLER REGS

IT IS ASSUMED THAT WORKS ASSOCIATED WITH THIS DESIGN WILL BE UNDERTAKEN BY A PERSON OR PERSONS WHO ARE COMPETENT AND HAVE THE REQUIRED LEVEL OF EXPERIENCE AND EXPERTISE

Rev	Description	Date	Initials
-	-	-	-

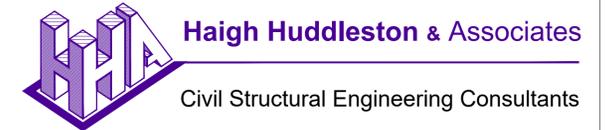

Firth Buildings, 99 - 101 Leeds Rd, Dewsbury, WF12 7BU | 01924 464342 | 01924 450662
e marlin@haighhuddleston.co.uk

Client
YORKSHIRE COUNTRY PROPERTIES

Project
ABBEY ROAD, SHERLEY - PHASE 2

Detail
TEMPORARY WORKS PLAN

Dwg No. E17/7465/529
Scale 1/500 @A1
Date Apr 2022
Checked JM
Drawn RTH

PRELIMINARY