





2021. All rights reserved. Licence number 100022432


Ordnance Survey (c) Crown Copyright 2021. All rights reserved. Licence number 100022432

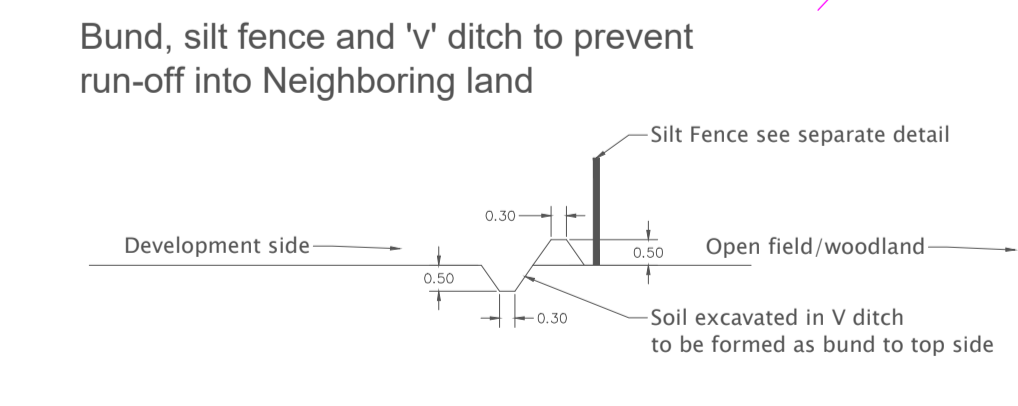


Section C-C Scale: NTS
Silt fence material to be tennax 31900700 or similar
Bunds to be created with site won topsoil or subsoils

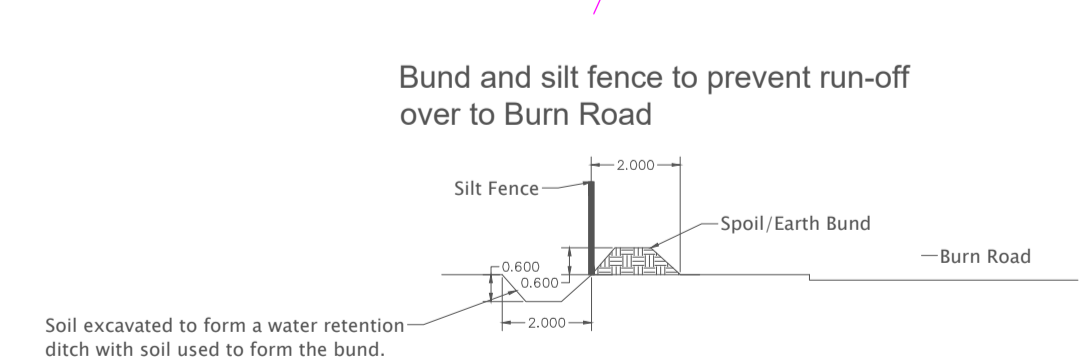

Section B-B Scale: NTS
Silt fence material to be tennax 31900700 or similar
Bunds to be created with site won topsoil or subsoils

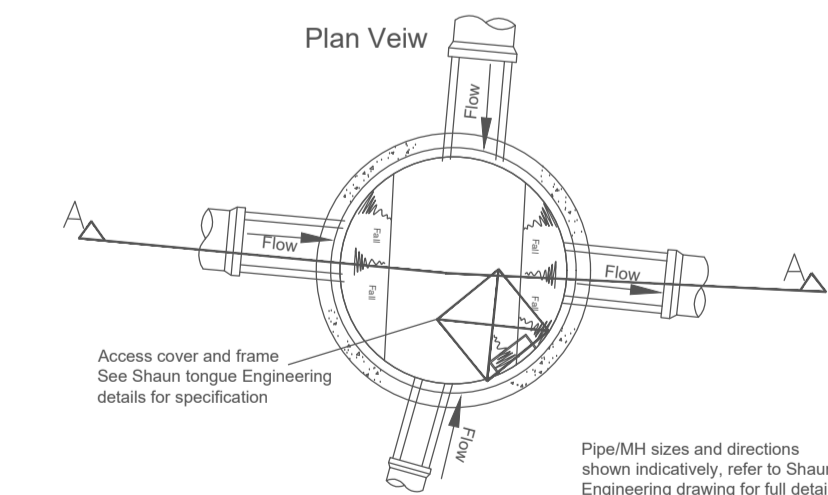


Reference must be made to Shaun Tongue Engineering drainage details drawing for full and final manhole construction details

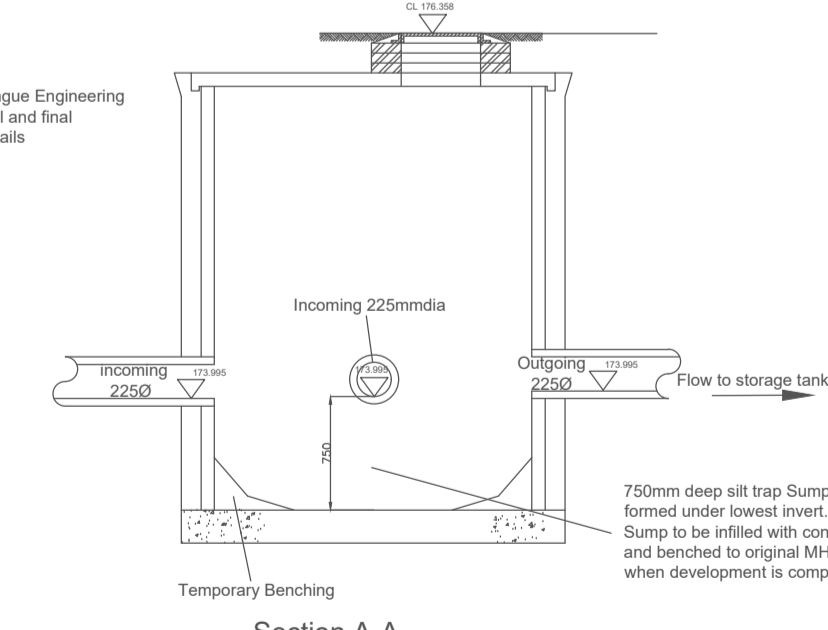


Typical silt trap Sump
General arrangement at Manhole S4
Scale 1:50

- Key:-**
- Direction of overland flow
 - Denotes Gully guard bag by forest group or similar
 - Denoted Witches Hat by Yellow shield or similar installed into SW manholes
 - Silt fence installation
- See typical installation methods below

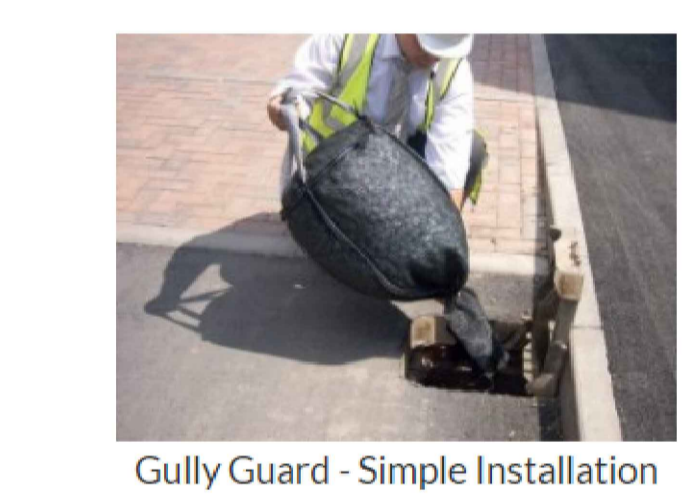

Gully Guard - Simple Installation

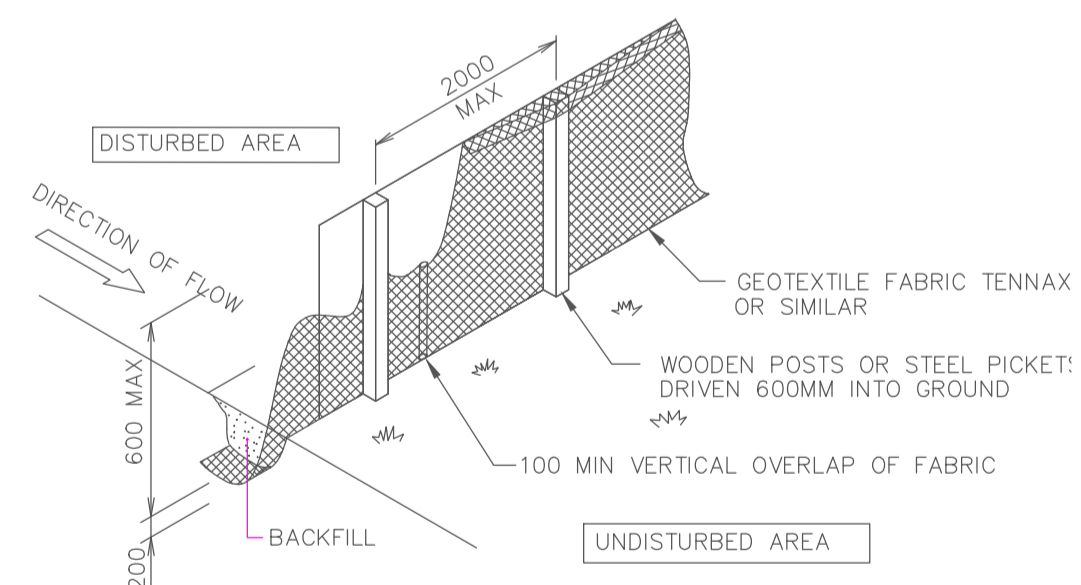

TYPICAL SILT FENCE DETAIL
NOT TO SCALE

Notes:-
 Topsoil and vegetation strip areas to be limited to the immediate build zone only. As much topsoil and vegetation as possible is to be retained on site for as long as is possible in order to slow down surface water overland flows.
 Do not deposit rubble, building waste, soil, concrete etc into manholes.
 All manhole access covers including domestic access covers are to be kept on the manhole at all times.
 Any damaged access cover lids are to be replaced immediately along with the Witches hat.
 Regular checks of all silt fencing to be carried out to ensure they are in a good state of repair.
 Weekly checks required and following a heavy downpours.
 A sign off sheet recording inspections is to be completed and retained in the site office for inspection by regulators/head office.
 Any damage identified is to be rectified immediately.
 Build up of silts against the silt fence is to be cleared regularly following above inspections.
 Regular checks on Sump manholes are required, desilting of sumps to be completed when buildup of silts reaches > 50% .
 Regular road scrapes/sweeps and cleaning is required increased during winter months.

A review of the SWMP is to be carried out by the site team and Newett Homes H&S/office engineer every 6 months to ensure it is fit for purpose and to identify any changes or updates that are required due to incidents or changes to the build schedule. Heavy fines are applicable to the developer if these measures are not followed and results in the pollution of the surface water network and or local watercourses.

| Rev | Details | Date | Drawn | Chk. |
|--------------------------------------|---------|------|-------|------|
| Newett Homes | | | | |
| Yew Tree Road - Birchcliffe | | | | |
| Surface Water Management plan | | | | |
| Dwg No. : 7003-03 | | | | |
| Date : 07-11-25 | | | | |
| Scale : Plan 1:500 @ A1 | | | | |
| Drawn : PSGBS | | | | |