

NOTES - Where works to trees are proposed on site, or to overhanging vegetation to enable construction, this shall be undertaken by qualified tree surgeon in accordance with the requirements of BS3998:2010, prior to the installation of Protective Fencing.

Retained trees and vegetation, either within the site or on adjacent land, shall be protected where necessary during works by 2300mm high mesh panel (Heras type) fencing secured to a scaffold tubing framework or supported on a suitable base pinned into the ground and connected by none tamper fixings.

Protective fencing shall be erected outside the canopy drip-line or beyond the minimum Root Protection Area (RPA) distance wherever possible. The tree works & fencing works shall be carried out prior to any demolition, groundworks, construction works.


Laminated, waterproof A4 signs shall be fixed to the fence posts at 10m intervals bearing the words 'CONSTRUCTION EXCLUSION ZONE - NO STORAGE OR OPERATIONS WITHIN FENCED AREA as per the example on the plan.

PROTECTION OF CONSTRUCTION EXCLUSION ZONE

Inside the exclusion area of the fencing, the following prohibitions shall apply:-

- No mechanical excavation whatsoever.
- No excavation by any other means without arboricultural site monitoring.
- No hand digging without a written Method Statement approved in writing by the Project Arborist.
- No lowering of levels for any purpose (except removal of grass sward using hand tools).
- No construction of a sealed hard surface - except where agreed with the Project Arborist.
- No storage of plant or materials.
- No storage or handling of any chemical, including cement washings.
- No vehicular access.
- No fire lighting. In addition to the above, further precautions are necessary adjacent to trees:-
- A 10m separation distance shall be observed between any tree and substances injurious to tree health, including fuel, oil, bitumen, cement (including cement washings), builders' sand, concrete mixing and other chemicals.
- No fire shall be lit such that flames come within 5m of tree foliage; this shall be taken to mean a fire separation distance of 20m from any tree's canopy.

ALL WORKS AFFECTING TREES SHALL BE SUBJECT TO THE REQUIREMENTS OF BS5837:2012.

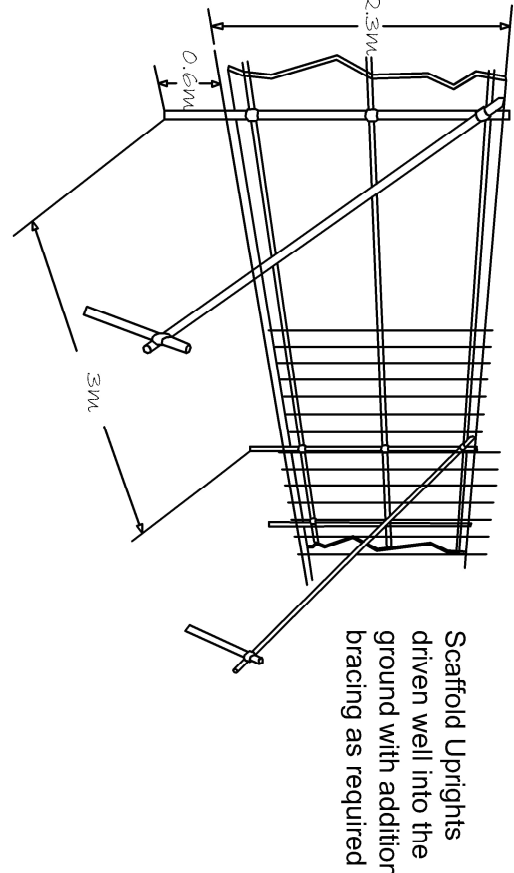


Tree Protection Fencing Type 1 (TPF1)

Tree Protection Fencing Type 3 (TPF3)



© Barnes Associates Ltd. This plan should be viewed in CAD format. Please do not scale from this drawing, all dimensions should be taken from the plan. Any errors or omissions are the responsibility of Barnes Associates Ltd. All rights reserved. This plan is the property of Barnes Associates Ltd. All rights reserved. This plan is the property of Barnes Associates Ltd. All rights reserved.

Individual Tree Symbols

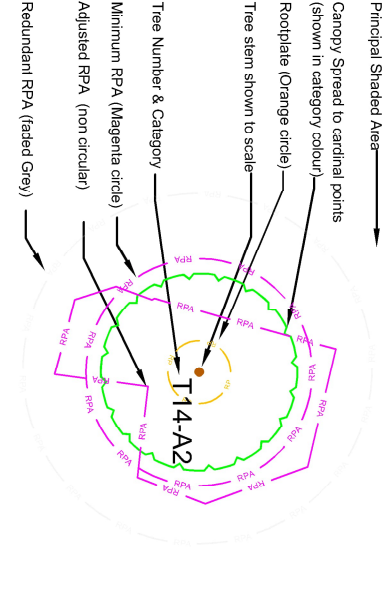

Tree Management Requirements

Trees to be retained within the scheme and protected in line with the guidelines set out in BS5837.

Tree Group Hedge & Woodland Shelterbelt


- Retained group Canopy
- Pruned group Canopy (lightning)
- Group trees to enable the scheme
- Partial group loss to enable the scheme
- Group Root Protection Area (RPA)

Trees to be removed to enable the scheme to be carried out as proposed. All works to be undertaken in line with BS3998.

Trees identified as U category requiring management, irrespective of scheme

Plan is based upon the supplied topographical Survey Plan. Copies of this plan are available in CAD Format dwg & dxf upon request. Damaged Utility layout not provided.

Drawn By	B
Date	19/06/2026
Drawn By	Area to tree work added to survey

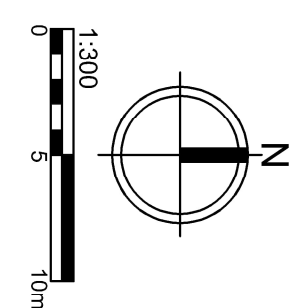

Client	Scholes Cricket Club
Project	Scholes Cricket Club, BD19 6NN
Title	Tree Protection Plan
Drawn By	BA26282TPP
Date	1:300 @ A1
Drawn By	19/06/2026
Drawn By	JE SB
Drawn By	SB

BARNES associates
SUNNY MANAGE IMPROVE
The Bungalow, Wetherby Road
Boroughbridge YO51 9HS
T 01423 322371
E info@barnesassociates.co.uk
W barnesassociates.co.uk
Company number 10438115
Registered in England and Wales



SCALE 1:100 @ A0
REVISION A