0m Scale 1:50 4m
0m Scale 1:100 8m
0m Scale 1:200 16m
0m Scale 1:1250 100m

[When to scale of original plan, bar = 8cm]

© Copyright Kirklees Metropolitan Council



SOUTH ELEVATION.



All windows & door on this East elevation to be obscure glazed.

EAST ELEVATION.



NORTH ELEVATION.

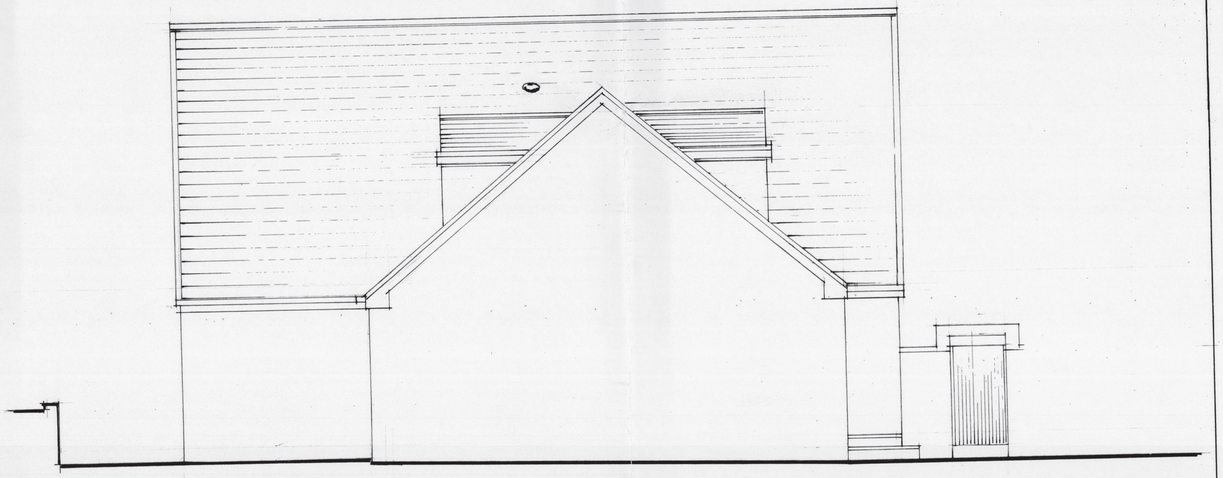

WEST ELEVATION.

PROPOSED EXTERNAL FINISHES •

WALLS
- Generally brick facings are to match existing.
- Feature walling on the E. elevation to be of cedar boarding.

ROOF
- All new roofing to be clad in 'Roman' profile tiles to match existing

DOORS
- All new external doors to be of UPVC to match existing

WINDOWS
- Vertical windows ditto

Roof window to be 550 x 780 centre pivot 'Velux' - white polyurethane.

The 3ne glove rooflights to be 350 dia 'Sunpipes'

BALCONY
- Balustrading to be of S/S frames with glass panels.



SECTION A

E		
D		
C		
B		
A	Amended to comply with Client requirements.	June'17

manor building services
3 · milner close
greetland
halifax HX4 8JZ
tel · 01422 370000
e-mail · mbs@atlas.co.uk

PROPOSED REMODELLING

339 SOOTHILL LANE BATLEY

scale · 1:50
date · May '17
drg. nº **258 A**