



Haigh Huddleston & Associates

Civil & Structural Engineering Consultants

Firth Buildings, 99 - 101 Leeds Road, Dewsbury, WF12 7BU

t 01924 464342 f 01924 450662 e trevor.haigh@haighhuddleston.co.uk

Phase 1 Geo-environmental Report

ON

PROPOSED DEVELOPMENT

AT

**Abbey Road North, Shepley
Phase 2**

FOR

YORKSHIRE COUNTRY PROPERTIES

October 2020

E19/7465/R003

Prepared by

M.Dean BSc HND

INDEX

1.0	Introduction	Page 3
2.0	The Site	Page 3
3.0	Site History	Page 5
4.0	Site Geology and Mining	Page 6
5.0	Environmental Considerations	Page 7
5.1	Radon	Page 7
5.2	Landfill Sites	Page 7
5.3	Flood Risk	Page 7
5.4	Groundwater	Page 7
6.0	Preliminary Conceptual Site Model	Page 9
7.0	Conclusions	Page 11
Appendix A	Site Location Plan Proposed Planning Layout Topographic Survey	
Appendix B	Geology Report Coal Authority Report	
Appendix C	Groundsure Report Historical Plans	

1.0 INTRODUCTION

- 1.1 This report is commissioned to examine the risk of contamination for the above site in line with the recommendations of Part II of the Environmental Protection Act 1990 PPS 23. It is based on information provided by both the client and statutory bodies in both written and verbal format. It is assumed that all information given is correct and factual at the time of writing this report. No liabilities can be accepted for information provided by third parties and subsequently found to be in error.

2.0 THE SITE

- 2.1 The site is located to the east of Abbey Road North (A629), Shepley, and is situated around Ordnance Survey grid reference 419950, 410100. A site location plan is included in Appendix A.
- 2.2 The site is irregular in shape, with the western boundary formed by Abbey Road North, and the north eastern boundary formed by Knowle Road. The southern boundary is formed by adjacent fields. The approximate site area is 1.9ha.
- 2.3 A dry stone wall crosses the site from south to north dividing the site into a western third and an eastern two-thirds. The watercourse follows the line of the stone wall and exits the site to the north beneath Knowle Road before being culverted beneath the railway embankment.
- 2.4 The western third of the site is overgrown with long grass and nettles. There is immature tree growth to the western edge and southern third of this field which is fenced off. In the central and eastern areas of the site are several small outbuildings and a concrete floor slab to a former building.
- 2.5 The eastern two thirds consist of better kept shorter cut grass. There is immature tree growth noted to the northern boundary and in the southern third of the field. A single greenhouse is located in the south east of the site.
- 2.6 The majority of the site boundary is formed by a 1m high dry stone wall. The central area of the southern boundary is formed by a post and wire fence.

- 2.7 The site slopes from south to north at a grade of approximately 1 in 9, from a high point of 183.75m AOD in the south eastern corner towards a low point of 168.80m AOD in the central northern area. The watercourse is approximately 600-800mm lower than the adjacent ground.
- 2.8 Overhead electricity lines start in the north west and head eastwards adjacent the northern boundary. A second set of overhead electricity lines start adjacent the western boundary and head southwards. It is assumed there are underground electricity cables in this area of the site.
- 2.9 A foul sewer enters the site from a property to the south and leaves the northern boundary adjacent the watercourse.

3.0 SITE HISTORY

A number of historical Ordnance Survey plans from 1854-2014 have been consulted. These are contained for reference within Appendix C to the rear of the report. Below is a brief description outlining the significant developments that may effect future construction of the site.

Date	Historical uses on site	Historical findings within 100m perimeter of the site	Historical findings further than 100m perimeter of the site
1854	i) The site is shown as open fields. ii) A well is indicated in the middle of the northern boundary.	i) Abbey Lane forms the western boundary. ii) Un-named track forms northern and eastern boundaries. iii) Railway line heading west-east 20m north of the site.	i) Old coal pit 400m south of site.
1891-1892	i) Wells no longer shown.	i) Gas works 10m west of the site.	i) Victoria Mills and mill ponds 150m south of site. ii) Old coal pit no longer shown 400m south of site.
1903-1906	i) The on-site features are similar to the previous sheet.	i) Abbey Lane Malthouse 10m north west of site. ii) Shepley Saw Mill 20m west of site.	i) No significant developments further than 100m from the site.
1932-1970	i) The on-site features are similar to the previous sheet.	i) Gas works no longer labelled 10m west of site.	i) No significant developments further than 100m from the site.
2002	i) The on-site features are similar to the previous sheet.	i) Pond located immediately south of the site.	i) No significant developments further than 100m from the site.
2010-2014	i) The on-site features are similar to the previous sheet.	i) No significant developments within 100m of the site.	i) No significant developments further than 100m from the site.

4.0 SITE GEOLOGY & MINING

- 4.1 The BGS Digital Geological Map of Great Britain at 1:10,000 and 1:50,000 scale have been consulted and we would report as follows:-
- 4.2 There are no areas of made ground or superficial deposits shown overlying the site, however an area of made ground is located approximately 20m north of the site associated with the railway line.
- 4.3 The western third of the site is underlain by the Grenoside Sandstone formation, consisting of Sandstone. The eastern two-thirds of the site are underlain by the Pennine Lower Coal Measures Formation consisting of Mudstone, Siltstone and Sandstone.
- 4.4 A Coal Authority Report is included in Appendix B and states that the property is not in a surface area that could be affected by past recorded underground coal mining. However, the property is in an area where the Coal Authority believes that there is coal at or close to the surface, which may have been worked at some point in the past.
- 4.5 The property is not in area where the Coal Authority has granted, or plans to grant, a licence to remove or otherwise work coal using underground methods. However, reserves of coal are thought to exist in the local area which could be worked at some time in the future.
- 4.6 No mine entries are recorded within 20m of the site boundary.
- 4.7 The Coal Authority Interactive Map Viewer shows a coal outcrop crossing the site from south to north adjacent the stream. To the east of this outcrop, approximately two thirds of the site is shown to be an area of probable shallow mine workings.
- 4.8 Boreholes undertaken in Phase 1 to the south of this development proved up to 0.7m of topsoil and clays overlying 15.9-16.5m of sandstone. Beneath the sandstone, there were alternating bands of mudstone to a depth of 30m below existing ground levels. It should be noted these boreholes were undertaken to the west of the indicated coal seam, the probable workings are indicated to the east.

5.0 ENVIRONMENTAL CONSIDERATIONS

5.1 Radon

The site is not in a Radon Affected Area, as less than 1% of properties are above the Action Level.

No Radon Protective Measures are necessary.

5.2 Landfill Sites

A landfill recorded as accepting inert and industrial waste is located 10m north east of the site.

5.3 Flood Risk

The site is not located within a designated Environment Agency flood risk zone or shown to be at risk of flooding from rivers or the sea.

5.4 Groundwater

The bedrock underlying the site is classed as Secondary A Aquifer. These are Permeable layers capable of supporting water supplies at a local rather than strategic scale, and in some cases forming an important source of base flow to rivers. These are generally aquifers formerly classified as minor aquifers.

There are six groundwater abstraction licences for potable water recorded within 500m of the site. These are located 215-220m south west of the site.

A revoked discharge consent with an effluent type of unspecified trade discharges is recorded 105m south west of the site, with the receiving water being a tributary stream of Shepley Dike. This was active from 1982-1991.

There are no surface water abstraction licences recorded within 250m of the site.

There is one recorded pollution incident to controlled waters within 250m of the site. This is identified as oils and fuels pollution, and located 70m north west of the site. This was classified as a Category 3 (minor) incident..

Only the central southern area of the site, where the watercourse enters the site, is located in Source Protection Zone 1.

The nearest open surface water feature is an un-named watercourse crossing the centre of the site from south-west to north-east. This is classified as an inland river not influenced by normal tidal action.

6.0 PRELIMINARY CONCEPTUAL SITE MODEL

- 6.1 The initial stage in assessing the risks posed from contaminated land during the redevelopment of a site is to prepare a conceptual model. A generalised conceptual model can be developed highlighting the main pollutant linkages through a contaminant ► pathway ► receptor model for a residential housing development. In order to prepare the conceptual model for a particular site the following parameters need to be reviewed as discussed below.
- 6.2 Contamination of existing land can be caused by a number of factors, including:-
- i) Possible historical/current industrial activities.
 - ii) Disposal of waste materials.
 - iii) Storage of materials.
 - iv) A number of natural processes can also lead to hazardous gases and elevated heavy metals.
- 6.3 Potential pathways can include ground and surface water, permeable strata, existing services providing a conduit and voided ground. Potential receptors can include human health, ecosystems, controlled waters and building structures. There are a number of ways that a receptor can be exposed to the contaminant these include, inhalation, direct contact, ingestion, dermal contact and uptake.
- 6.4 There have been no reported historical uses of the site likely to cause significant contamination, however there is a potential risk of contamination from the following:-
- i) Possible shallow mine workings beneath the site.
 - ii) Industrial land uses west of the site, including engineering and gas works.
 - iii) Potential ground gas migration from shallow mine workings and landfill to north east of site.
 - iv) Construction materials within outbuildings in western third of site.
- 6.5 Considering the proposed health care end use, there will be two possible human receptor groups exposed to the existing onsite contamination:-
- a) Site operatives during development.
 - b) End users, future site residents (the critical receptor is a 6 year old female).

- 6.6 Human receptors may be exposed to site contamination by a number of possible pathways. These pathways are summarised in Table 1 below.

Table 1- Potential Human Exposure Pathways

<u>Human Exposure Pathway</u>	<u>Site Residents</u>	<u>Construction Workers</u>
Soil Ingestion	YES	YES
Consumption of Home Grown Vegetables	YES	NO
Dermal Contact	YES	YES
Dust Inhalation	YES	YES
Gases/Vapours	YES	NO

- 6.7 The construction workers will come into contact with any contaminated soil to a far greater extent than future residents. The exposure pathways are generally through dermal contact and indirect ingestion. However their exposure will be for a limited time and the provision and correct use of personnel protective equipment and adequate welfare facilities during construction should restrict their risks to acceptable levels.
- 6.8 The risk of pollution to controlled waters by existing contamination is considered low. There have been no recorded historical uses of the site likely to cause significant contamination. However, there is a risk that surface water run-off during construction on site may wash contaminants into the watercourse crossing through the site. It is recommended a surface water management plan is put in place prior to commencing work on site.
- 6.9 No specific areas of ecological importance have been identified in the initial desk top study. Therefore the site is considered to be in a low risk environmental setting. The potential for phototoxic materials to exist at shallow depth should be considered, these could pose a potential risk to new planting and soft landscaping areas within the proposed development.
- 6.10 The proposed planning drawings show detached, semi-detached and terraced houses, with private garden and car parking areas. The presence of elevated sulphates and hydrocarbons could affect the long term integrity of buried concrete structures, including foundations and drainage pipes. Plastic water supply pipes can also be damaged by the presence of hydrocarbon contamination.

7.0 CONCLUSIONS

- 7.1 From review of the historical plans, there appears to have been little or no previous historical development directly overlying the site, but there are probable shallow mine workings indicated beneath the eastern two thirds of the site and a landfill recorded immediately east of the site.
- 7.2 The site is considered to be at a low-moderate risk from ground gas migration from the landfill site located 10m north east of the site, as well as from the probable shallow mine workings.
- 7.3 Although the western third of the site is shown to be underlain by sandstone, due to the steep nature of the site, there is the possibility of water re-emergence in the lower areas of the site, as well as in properties downhill of the site. In addition to this, the eastern two thirds of the site are shown to be underlain by a mix of mudstones, siltstones and sandstones. We would therefore consider it unlikely that infiltration methods will be a viable form of surface water disposal.
- 7.4 Considering the above, we would recommend that a detailed Stage II Ground Investigation should be undertaken to confirm the foundation construction required for the proposed development. Due to the potential for unrecorded shallow mine workings to exist below the site, it will be necessary to undertake rotary drilling to determine the presence and depth of worked ground beneath the site, particularly to the east of the watercourse. As these investigations will enter and/or disturb Coal Authority interests, application should be made to the Coal Authority for undertaking the rotary boreholes.
- 7.5 Gas monitoring stations should be installed on site to determine if ground gas migration from probable shallow mine workings and the landfill recorded to the east will adversely affect the development.
- 7.6 Samples should be taken from any suspected areas of contamination and tested for metals, metalloids, EPA 16 PAHS and asbestos. This should include samples from the vicinity of the historical tanks adjacent to the south eastern site boundary.
- 7.7 Samples of any clays encountered should be submitted for geotechnical analysis to determine the volume change potential and effect the trees along the site boundaries will have on the proposed foundations.

- 7.8 If any contamination is found, a site remediation report should outline the most effective method of dealing with the contamination and any validation requirements.

Prepared by

Redacted

M. Dean. BSc HND

Checked by

Redacted

M. Huddleston. MEng

October 2020

This report is subject to the provisions of the Copyright Acts and is for the sole benefit of Yorkshire Country Properties in respect of the proposals described.

APPENDIX A

LOCATION PLAN

PLANNING LAYOUT

TOPOGRAPHIC SURVEY



Haigh Huddleston & Associates

Civil Structural Engineering Consultants

t 01924 464342 f 01924 450662
e Trevor.haigh@haighhuddleston.co.uk

Firth Building
99-101 Leeds Road
Dewsbury
WF12 7BU

Client : Yorkshire Country Properties
Job Title: Abbey Road, Shepley (Phase 2)
Job Number : E19/7465


LOCATION PLAN

OS Grid Reference : SE 199100
Easting : 419945
Northing : 410087

Topographical Survey carried out using
GPS.



MASTER PLAN / PHASE 2 PROPOSALS - ABBEY ROAD, SHEPLEY

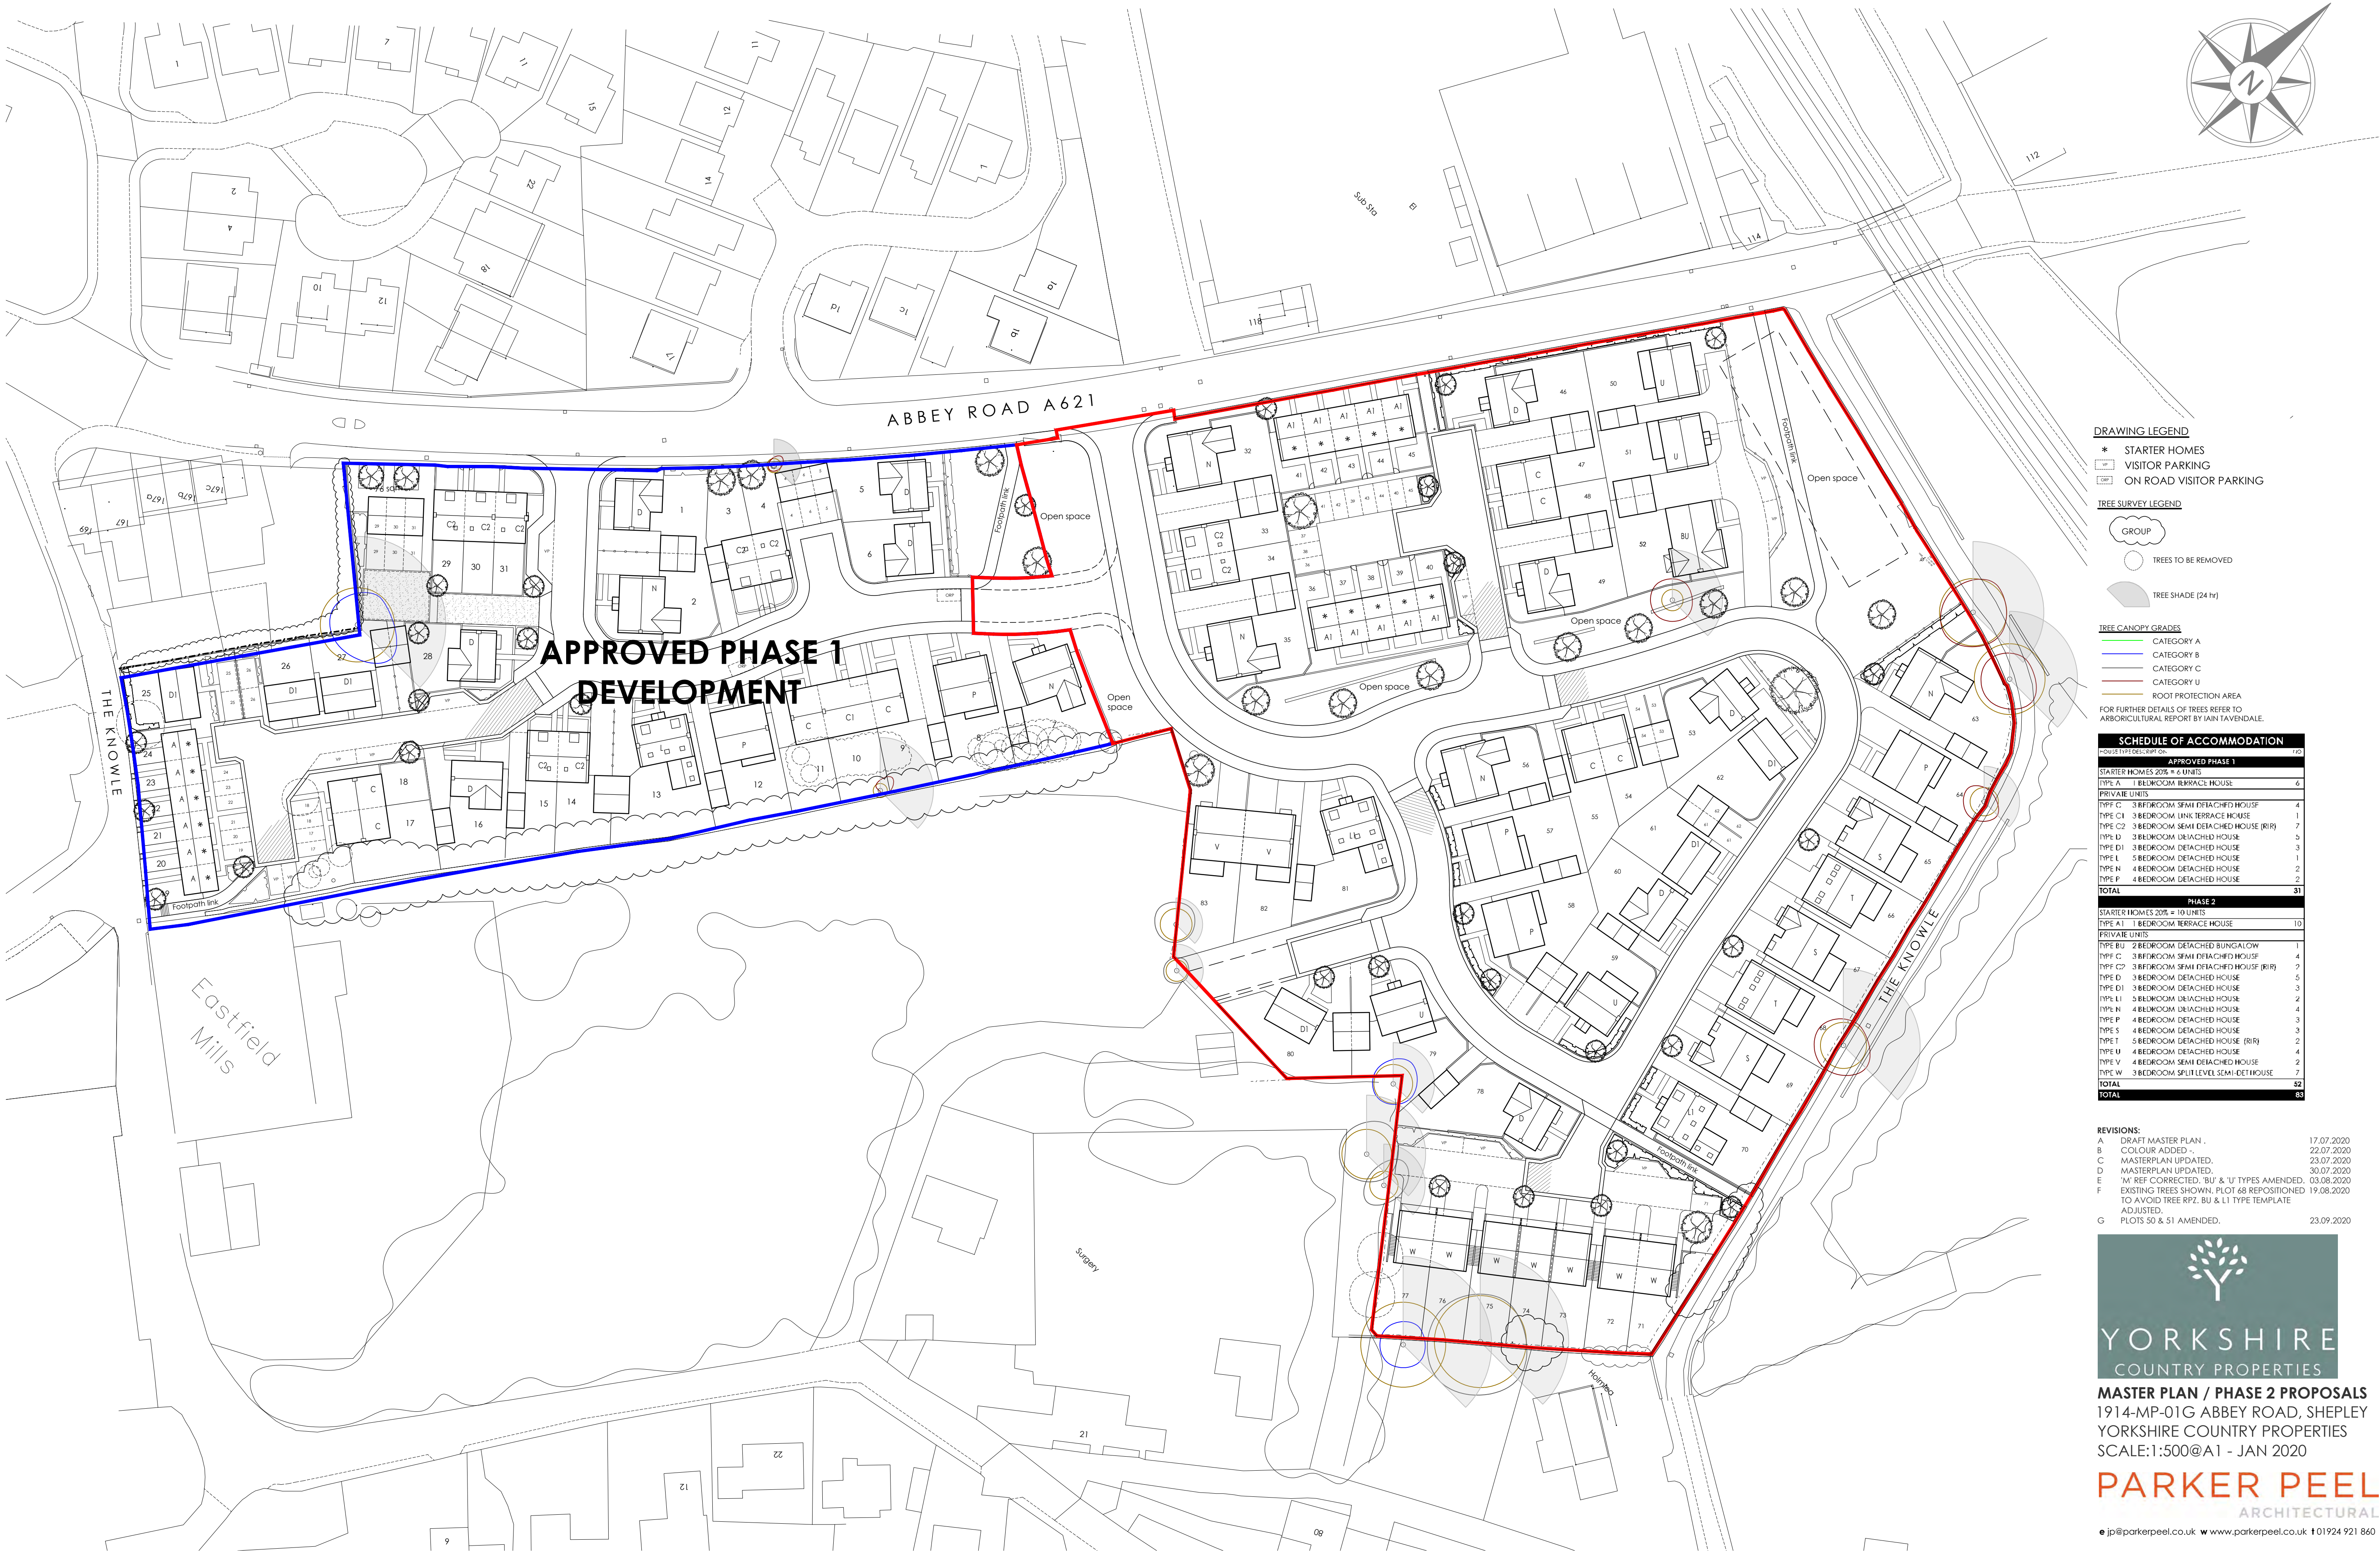

- DRAWING LEGEND**
- * STARTER HOMES
 - VISITOR PARKING
 - ON ROAD VISITOR PARKING

- TREE SURVEY LEGEND**
- GROUP
 - TREES TO BE REMOVED
 - TREE SHADE (24 hr)

- TREE CANOPY GRADES**
- CATEGORY A
 - CATEGORY B
 - CATEGORY C
 - CATEGORY U
 - ROOT PROTECTION AREA
- FOR FURTHER DETAILS OF TREES REFER TO ARBORICULTURAL REPORT BY IAIN TAVENDALE.

SCHEDULE OF ACCOMMODATION	
APPROVED PHASE 1	
STARTER HOMES 20% = 6 UNITS	
TYPE A1 1 BEDROOM TERRACE HOUSE	6
PRIVATE UNITS	
TYPE C1 3 BEDROOM SEMI DETACHED HOUSE	4
TYPE C2 3 BEDROOM SEMI DETACHED HOUSE (RR)	7
TYPE D1 3 BEDROOM DETACHED HOUSE	5
TYPE L1 5 BEDROOM DETACHED HOUSE	3
TYPE N1 4 BEDROOM DETACHED HOUSE	2
TYPE F1 4 BEDROOM DETACHED HOUSE	2
TOTAL	31
PHASE 2	
STARTER HOMES 20% = 10 UNITS	
TYPE A1 1 BEDROOM TERRACE HOUSE	10
PRIVATE UNITS	
TYPE BU 2 BEDROOM DETACHED BUNGALOW	1
TYPE C1 3 BEDROOM SEMI DETACHED HOUSE	4
TYPE C2 3 BEDROOM SEMI DETACHED HOUSE (RR)	7
TYPE D1 3 BEDROOM DETACHED HOUSE	5
TYPE L1 5 BEDROOM DETACHED HOUSE	3
TYPE N1 4 BEDROOM DETACHED HOUSE	4
TYPE P1 4 BEDROOM DETACHED HOUSE	3
TYPE S1 5 BEDROOM DETACHED HOUSE	3
TYPE T1 5 BEDROOM DETACHED HOUSE (RR)	2
TYPE U1 4 BEDROOM DETACHED HOUSE	4
TYPE V1 4 BEDROOM SEMI DETACHED HOUSE	2
TYPE W1 3 BEDROOM SPLIT LEVEL SEMI-DET HOUSE	7
TOTAL	52
TOTAL	83


- REVISIONS:**
- | | | |
|---|--|------------|
| A | DRAFT MASTER PLAN | 17.07.2020 |
| B | COLOR ADDED | 22.07.2020 |
| C | MASTERPLAN UPDATED | 23.07.2020 |
| D | MASTERPLAN UPDATED | 30.07.2020 |
| E | M RPT CORRECTED, BU & U TYPES AMENDED | 03.08.2020 |
| F | EXISTING TREES SHOWN, PLOT 68 REPOSITIONED TO AVOID TREE RPZ, BU & L1 TYPE TEMPLATE ADJUSTED | 19.08.2020 |
| G | PLOTS 50 & 51 AMENDED | 23.09.2020 |



MASTER PLAN / PHASE 2 PROPOSALS
1914-MP-01G ABBEY ROAD, SHEPLEY
YORKSHIRE COUNTRY PROPERTIES
SCALE:1:500@A1 - JAN 2020

PARKER PEEL
ARCHITECTURAL

✉ jp@parkerpeel.co.uk 🌐 www.parkerpeel.co.uk ☎ 01924 921 860

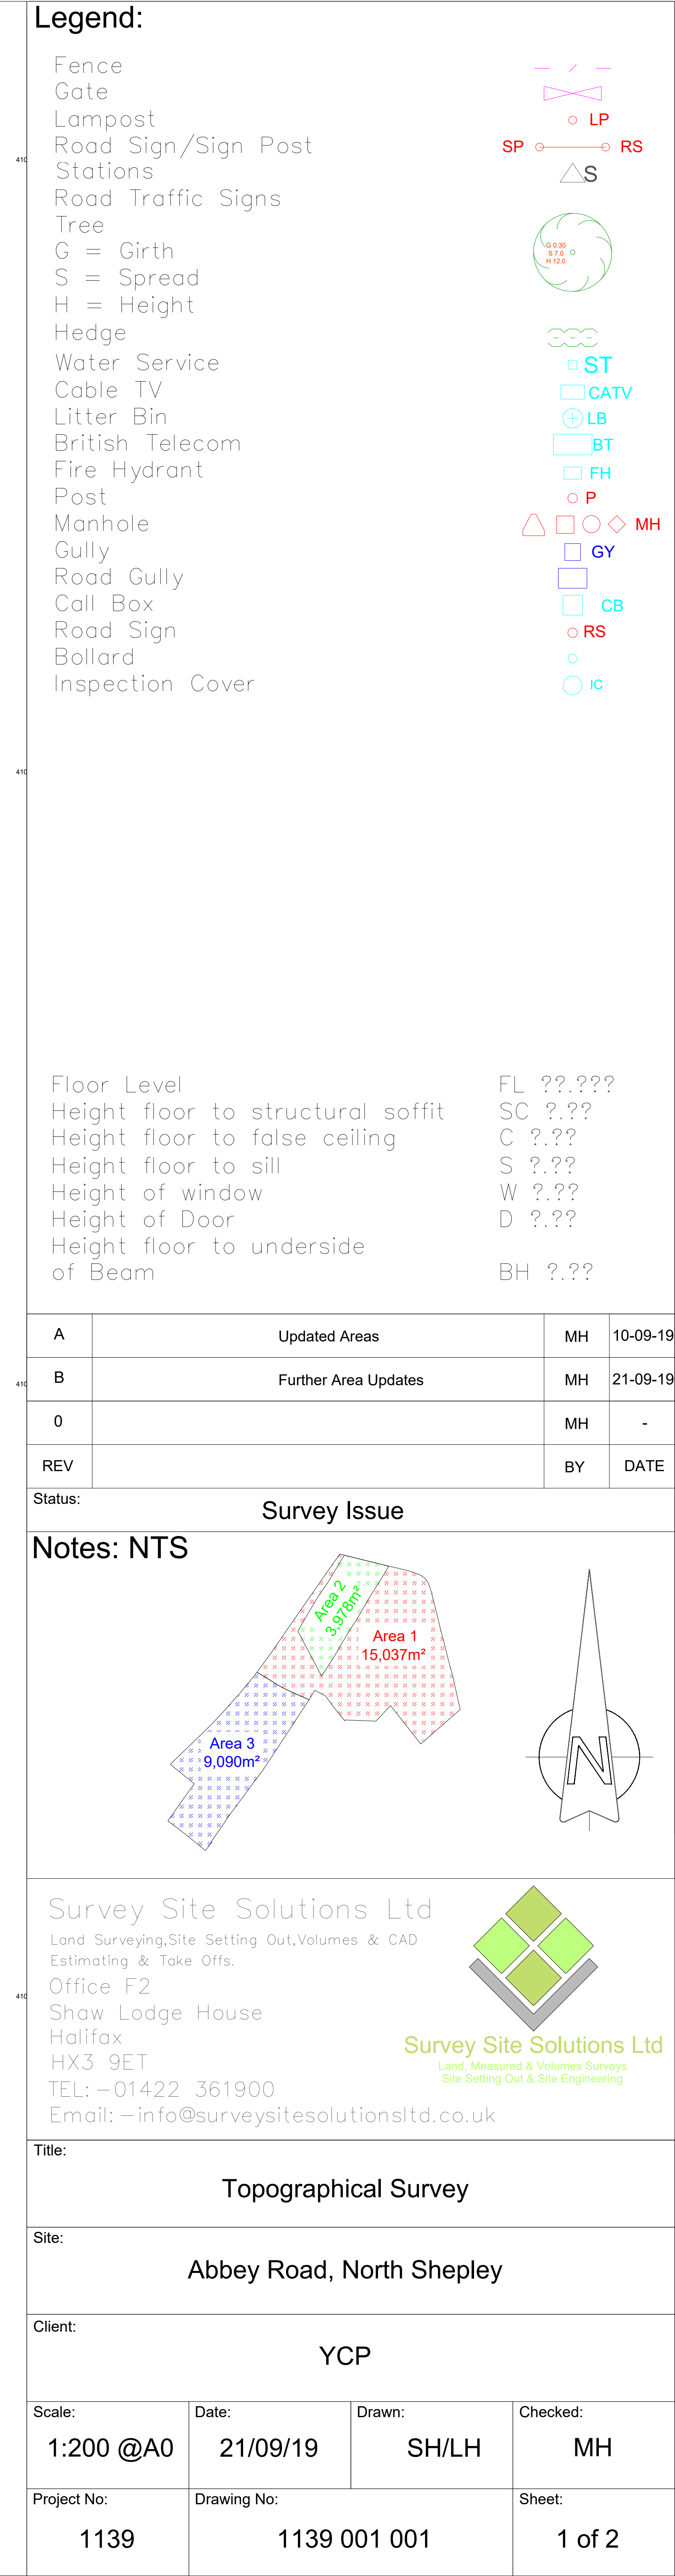

APPENDIX B

GEOLOGICAL REPORT

COAL AUTHORITY REPORT

Haigh Huddleston & Associates

99-101, LEEDS ROAD,
DEWSBURY, WF12 7BU

Groundsure
Reference:

GS-6047537

Your Reference:

YORKSHIRE_COUNTRY_PROPERTIES_
7465

Report Date

22 May 2019

Report Delivery
Method:

Email - pdf

Geo Insight

Address: 419815, 410001,

Dear Sir/ Madam,

Thank you for placing your order with Groundsure. Please find enclosed the **Groundsure Geo Insight** as requested.

If you need any further assistance, please do not hesitate to contact our helpline on 08444 159000 quoting the above Groundsure reference number.

Yours faithfully,

Redacted

Managing Director
Groundsure Limited

Enc.
Groundsure Geo Insight

Address: 419815, 410001,
Date: 22 May 2019
Reference: GS-6047537
Client: Haigh Huddleston & Associates



Aerial Photograph Capture date: 29-Jun-2018
Grid Reference: 419815,410001
Site Size: 0.8858ha

Contents Page

Contents Page.....	3
Overview of Findings.....	5
1:10,000 Scale Availability.....	8
Availability of 1:10,000 Scale Geology Mapping.....	9
1 Geology (1:10,000 scale).....	10
1.1 Artificial Ground map (1:10,000 scale).....	10
1. Geology 1:10,000 scale.....	11
1.1 Artificial Ground.....	11
1.2 Superficial Deposits and Landslips map (1:10,000 scale).....	12
1.2 Superficial Deposits and Landslips.....	13
1.2.1 Superficial Deposits/ Drift Geology.....	13
1.2.2 Landslip.....	13
1.3 Bedrock and linear features map (1:10,000 scale).....	14
1.3 Bedrock and linear features.....	15
1.3.1 Bedrock/ Solid Geology.....	15
1.3.2 Linear features.....	15
2 Geology 1:50,000 Scale.....	17
2.1 Artificial Ground map.....	17
2. Geology 1:50,000 scale.....	18
2.1 Artificial Ground.....	18
2.1.1 Artificial/ Made Ground	18
2.1.2 Permeability of Artificial Ground.....	18
2.2 Superficial Deposits and Landslips map (1:50,000 scale).....	19
2.2 Superficial Deposits and Landslips.....	20
2.2.1 Superficial Deposits/ Drift Geology.....	20
2.2.2 Permeability of Superficial Ground	20
2.2.3 Landslip.....	20
2.2.4 Landslip Permeability.....	20
2.3 Bedrock and linear features map (1:50,000 scale).....	21
2.3 Bedrock, Solid Geology & linear features.....	22
2.3.1 Bedrock/Solid Geology.....	22
2.3.2 Permeability of Bedrock Ground.....	22
2.3.3 Linear features.....	22
3 Radon Data.....	24
3.1 Radon Affected Areas.....	24
3.2 Radon Protection.....	24
4 Ground Workings map.....	25
4 Ground Workings.....	26
4.1 Historical Surface Ground Working Features derived from Historical Mapping.....	26
4.2 Historical Underground Working Features derived from Historical Mapping.....	27
4.3 Current Ground Workings.....	28
5 Mining, Extraction & Natural Cavities.....	31
5.1 Historical Mining.....	31
5.2 Coal Mining.....	32
5.3 Johnson Poole and Bloomer.....	32
5.4 Non-Coal Mining.....	32
5.5 Non-Coal Mining Cavities.....	32
5.6 Natural Cavities.....	33
5.7 Brine Extraction.....	33
5.8 Gypsum Extraction.....	33
5.9 Tin Mining.....	33
5.10 Clay Mining.....	33
6 Natural Ground Subsidence.....	34
6.1 Shrink-Swell Clay map.....	34
6.2 Landslides map.....	35
6.3 Ground Dissolution of Soluble Rocks map.....	36
6.4 Compressible Deposits map.....	37
6.5 Collapsible Deposits map.....	38
6.6 Running Sand map.....	39

6 Natural Ground Subsidence.....	40
6.1 Shrink-Swell Clays.....	40
6.2 Landslides.....	41
6.3 Ground Dissolution of Soluble Rocks.....	41
6.4 Compressible Deposits.....	41
6.5 Collapsible Deposits.....	42
6.6 Running Sands.....	42
7 Borehole Records.....	44
8 Estimated Background Soil Chemistry.....	45
9 Railways and Tunnels map.....	46
9 Railways and Tunnels.....	47
9.1 Tunnels	47
9.2 Historical Railway and Tunnel Features	47
9.3 Historical Railways.....	48
9.4 Active Railways.....	48
9.5 Railway Projects.....	49

Overview of Findings

The Groundsure Geo Insight provides high quality geo-environmental information that allows geo-environmental professionals and their clients to make informed decisions and be forewarned of potential ground instability problems that may affect the ground investigation, foundation design and possibly remediation options that could lead to possible additional costs.

The report is based on the BGS 1:50,000 and 1:10,000 Digital Geological Map of Great Britain, BGS Geosure data; BRITPITS database; Non-coal mining data and Borehole Records, Coal Authority data including brine extraction areas, PBA non-coal mining and natural cavities database, Johnson Poole and Bloomer mining data and Groundsure's unique database including historical surface ground and underground workings.

For further details on each dataset, please refer to each individual section in the report as listed. Where the database has been searched a numerical result will be recorded. Where the database has not been searched '-' will be recorded.

Section 1: Geology 1:10,000 Scale

1.1 Artificial Ground	1.1 Is there any Artificial Ground/ Made Ground present beneath the study site at 1:10,000 scale?	No
1.2 Superficial Geology and Landslips	1.2.1 Is there any Superficial Ground/Drift Geology present beneath the study site at 1:10,000 scale?*	No
	1.2.2 Are there any records of landslide within 500m of the study site boundary at 1:10,000 scale?	No
1.3 Bedrock, Solid Geology and linear features	1.3.1 For records of Bedrock and Solid Geology beneath the study site* see the detailed findings section.	
	1.3.2 Are there any records of linear features within 500m of the study site boundary at 1:10,000 scale?	Yes

Section 2: Geology 1:50,000 Scale

2.1 Artificial Ground	2.1.1 Is there any Artificial Ground/ Made Ground present beneath the study site?	No
	2.1.2 Are there any records relating to permeability of artificial ground within the study site*boundary?	No
2.2 Superficial Geology and Landslips	2.2.1 Is there any Superficial Ground/Drift Geology present beneath the study site?*	No
	2.2.2 Are there any records of permeability of superficial ground within 500m of the study site?	No
	2.2.3 Are there any records of landslide within 500m of the study site boundary?	No
	2.2.4 Are there any records relating to permeability of landslips within the study site* boundary?	No

Section 2: Geology 1:50,000 Scale

2.3 Bedrock, Solid Geology and linear features

2.3.1 For records of Bedrock and Solid Geology beneath the study site* see the detailed findings section.

2.3.2 Are there any records relating to permeability of bedrock ground within the study site boundary?

Yes

2.3.3 Are there any records of linear features within 500m of the study site boundary?

Yes

Section 3: Radon

3. Radon

3.1 Is the property in a Radon Affected Area as defined by the Health Protection Agency (HPA) and if so what percentage of homes are above the Action Level?

The property is not in a Radon Affected Area, as less than 1% of properties are above the Action Level.

3.2 Radon Protection

No radon protective measures are necessary.

Section 4: Ground Workings


	On-site	0-50m	51-250	251-500	501-1000
4.1 Historical Surface Ground Working Features from Small Scale Mapping	0	1	16	Not Searched	Not Searched
4.2 Historical Underground Workings from Small Scale Mapping	0	0	0	0	14
4.3 Current Ground Workings	0	0	1	2	10

Section 5: Mining, Extraction & Natural Cavities

	On-site	0-50m	51-250	251-500	501-1000
5.1 Historical Mining	0	0	0	0	14
5.2 Coal Mining	1	0	0	0	0
5.3 Johnson Poole and Bloomer Mining Area	0	0	0	0	0
5.4 Non-Coal Mining*	0	0	0	0	0
5.5 Non-Coal Mining Cavities	0	0	0	0	0
5.5 Natural Cavities	0	0	0	0	0


Section 5: Mining, Extraction & Natural Cavities	On-site	0-50m	51-250	251-500	501-1000
5.6 Brine Extraction	0	0	0	0	0
5.7 Gypsum Extraction	0	0	0	0	0
5.8 Tin Mining	0	0	0	0	0
5.9 Clay Mining	0	0	0	0	0
Section 6: Natural Ground Subsidence	On-site				
6.1 Shrink-Swell Clay	Very Low				
6.2 Landslides	Very Low				
6.3 Ground Dissolution of Soluble Rocks	Negligible				
6.4 Compressible Deposits	Negligible				
6.5 Collapsible Deposits	Very Low				
6.5 Running Sand	Negligible				
Section 7: Borehole Records	On-site	0-50m	51-250		
7 BGS Recorded Boreholes	0	2	5		
Section 8: Estimated Background Soil Chemistry	On-site	0-50m	51-250		
8 Records of Background Soil Chemistry	3	3	0		
Section 9: Railways and Tunnels	On-site	0-50m	51-250	250-500	
9.1 Tunnels	0	0	0	Not Searched	
9.2 Historical Railway and Tunnel Features	0	0	9	Not Searched	
9.3 Historical Railways	0	0	0	Not Searched	
9.4 Active Railways	0	0	14	Not Searched	
9.5 Railway Projects	0	0	0	0	

1:10,000 Scale Availability

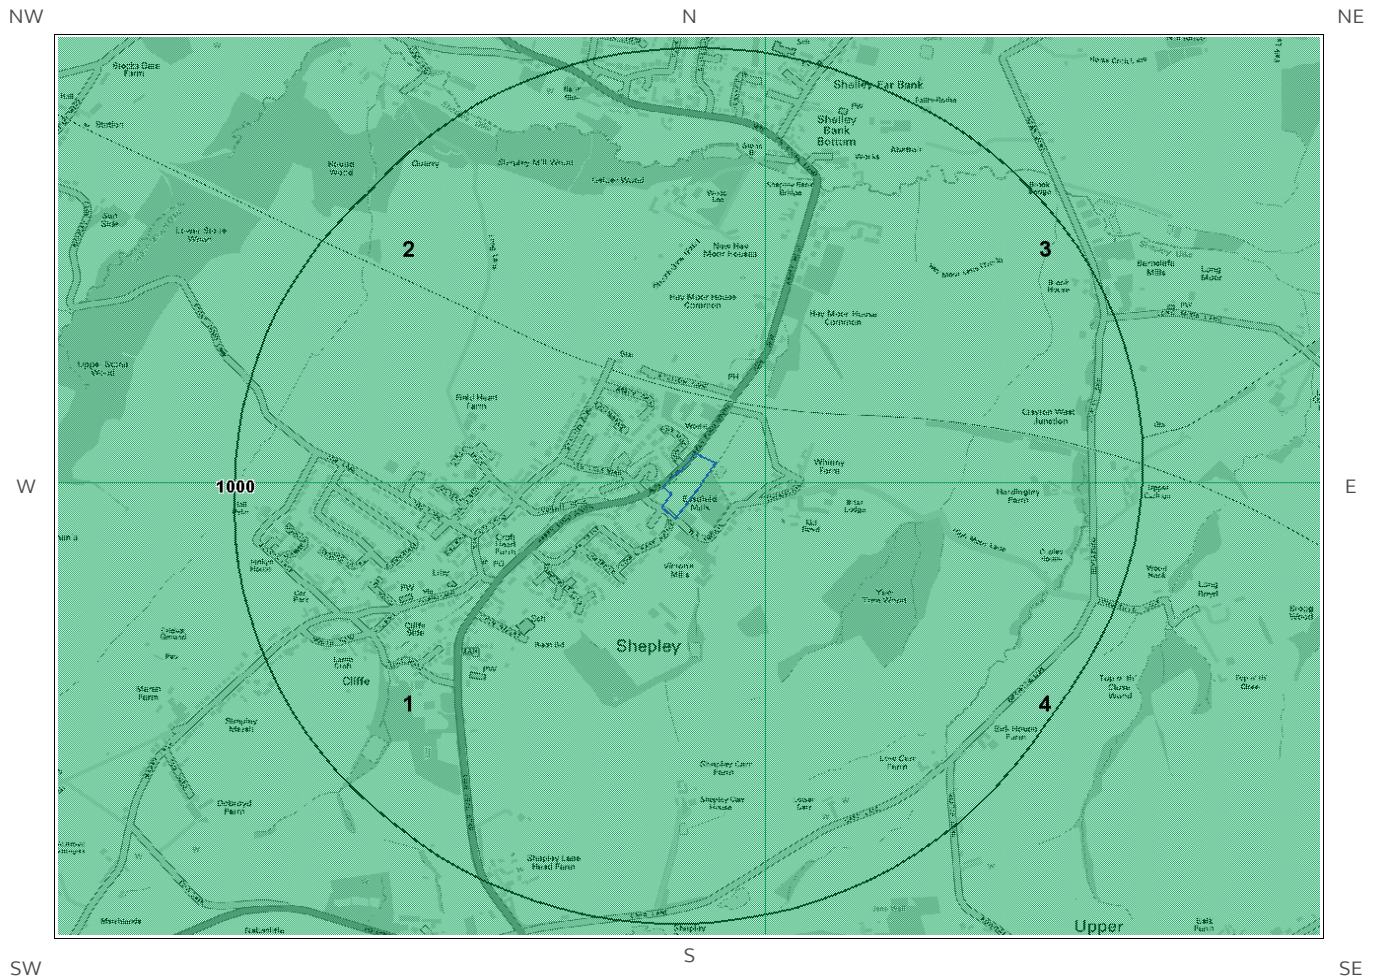

1_10,000 Availability Legend

© Crown copyright and database rights 2019.
Ordnance Survey licence 100035207.

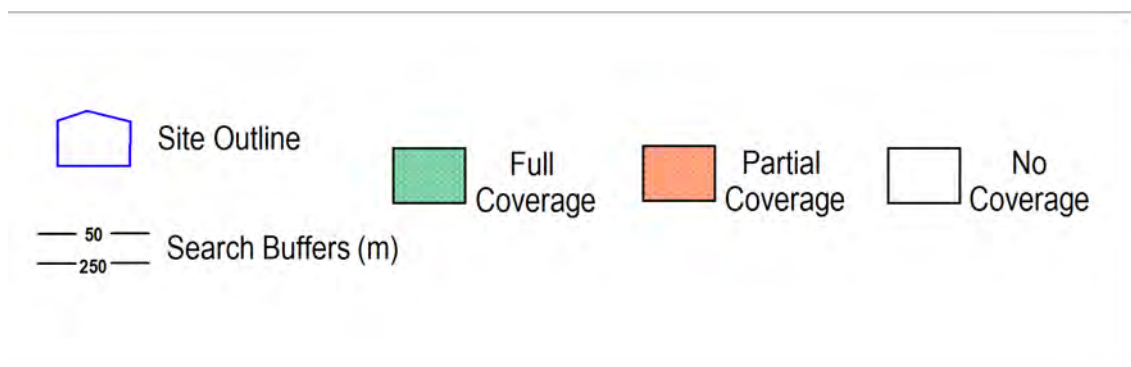

Availability of 1:10,000 Scale Geology Mapping

The following information represents the availability of the key components of the 1:10,000 scale geological data.

ID	Distance	Artificial Coverage	Superficial Coverage	Bedrock Coverage	Mass Movement Coverage
1	0.0	Some deposits are mapped	Full	Full	Some deposits are mapped
2	0.0	Some deposits are mapped	Full	Full	Some deposits are mapped
3	115.0	Some deposits are mapped	Full	Full	Some deposits are mapped
4	124.0	Some deposits are mapped	Full	Full	Some deposits are mapped


Guidance: The 1:10,000 scale geological interpretation is the most detailed generally available from BGS and is the scale at which most geological surveying is carried out in the field. The database is presented as four types of geology (artificial, mass movement, superficial and bedrock), although not all themes are mapped or available on every map sheet. Therefore a coverage layer showing the availability of the four themes is presented above.

The definitions of coverage are as follows:

Geology	Full Coverage	Partial Coverage	No Coverage
Bedrock	The whole tile has been mapped	Some but not all the tile has been mapped	No coverage
Superficial	The whole tile has been mapped	Some but not all of the tile has been mapped	No coverage
Artificial	Some deposits are mapped on this tile	-	No deposits are mapped
Mass Movement	Some deposits are mapped on this tile	-	No coverage

1 Geology (1:10,000 scale).

1.1 Artificial Ground map (1:10,000 scale)

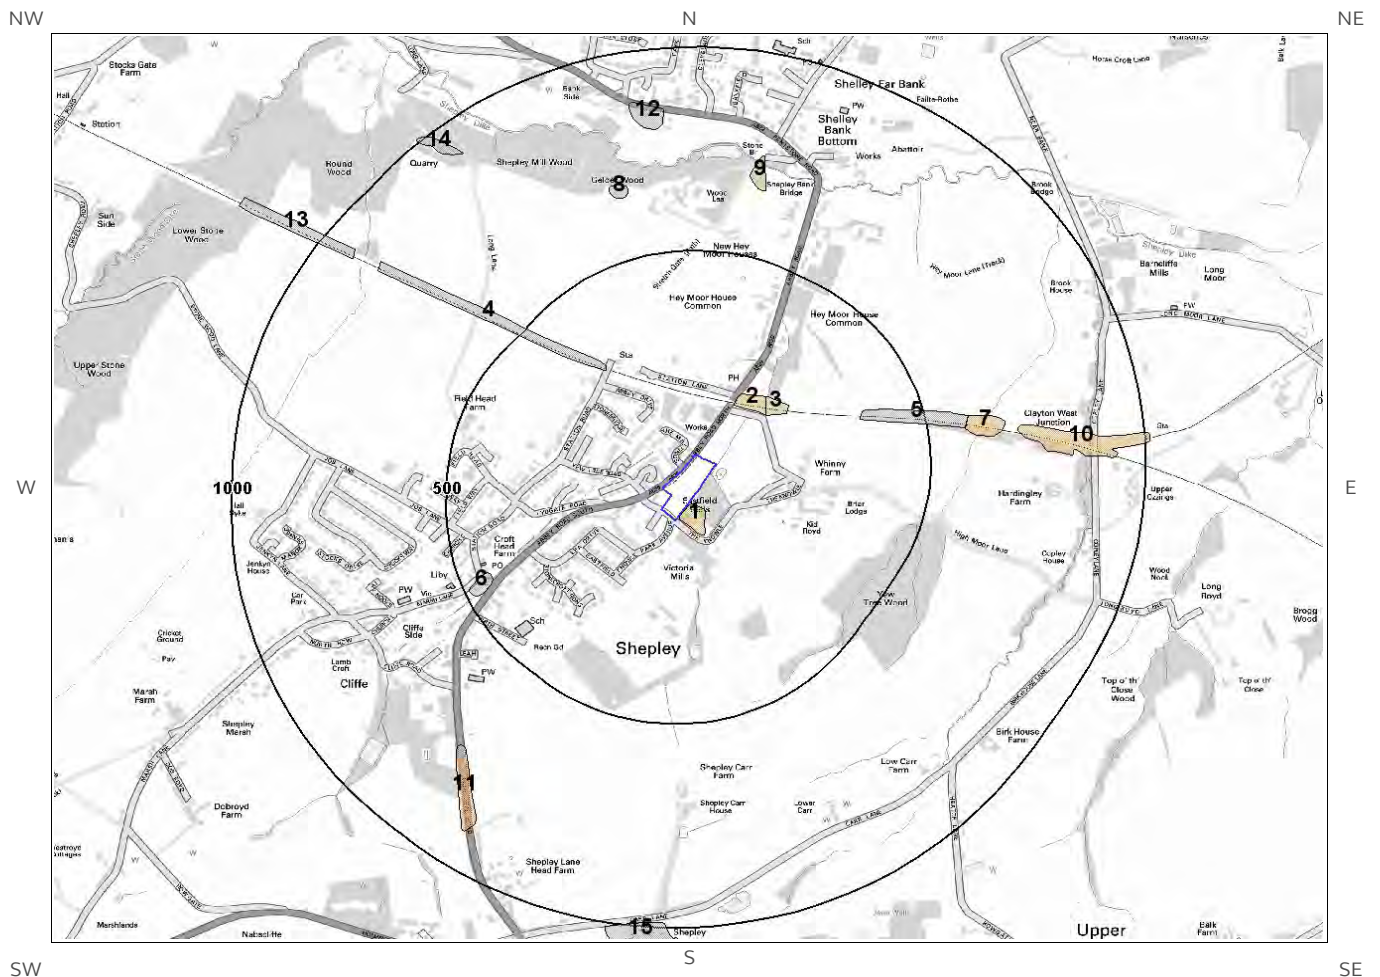

Artificial Ground Legend

© Crown copyright and database rights 2019.
Ordnance Survey licence 100035207.



1. Geology 1:10,000 scale


1.1 Artificial Ground

The following geological information represented on the mapping is derived from 1:10,000 scale BGS Geological mapping.

Are there any records of Artificial/ Made Ground within 500m of the study site boundary at 1:10,000 scale? Yes


ID	Distance	Direction	LEX Code	Description	Rock Description
1	0.0	SE	MGR-ARTDP	Made Ground (Undivided)	Artificial Deposit
2	148.0	NE	MGR-ARTDP	Made Ground (Undivided)	Artificial Deposit
3	166.0	NE	MGR-ARTDP	Made Ground (Undivided)	Artificial Deposit
4	295.0	NW	WGR-VOID	Worked Ground (Undivided)	Void
5	353.0	E	WGR-VOID	Worked Ground (Undivided)	Void
6	428.0	W	MGR-ARTDP	Made Ground (Undivided)	Artificial Deposit

1.2 Superficial Deposits and Landslips map (1:10,000 scale)

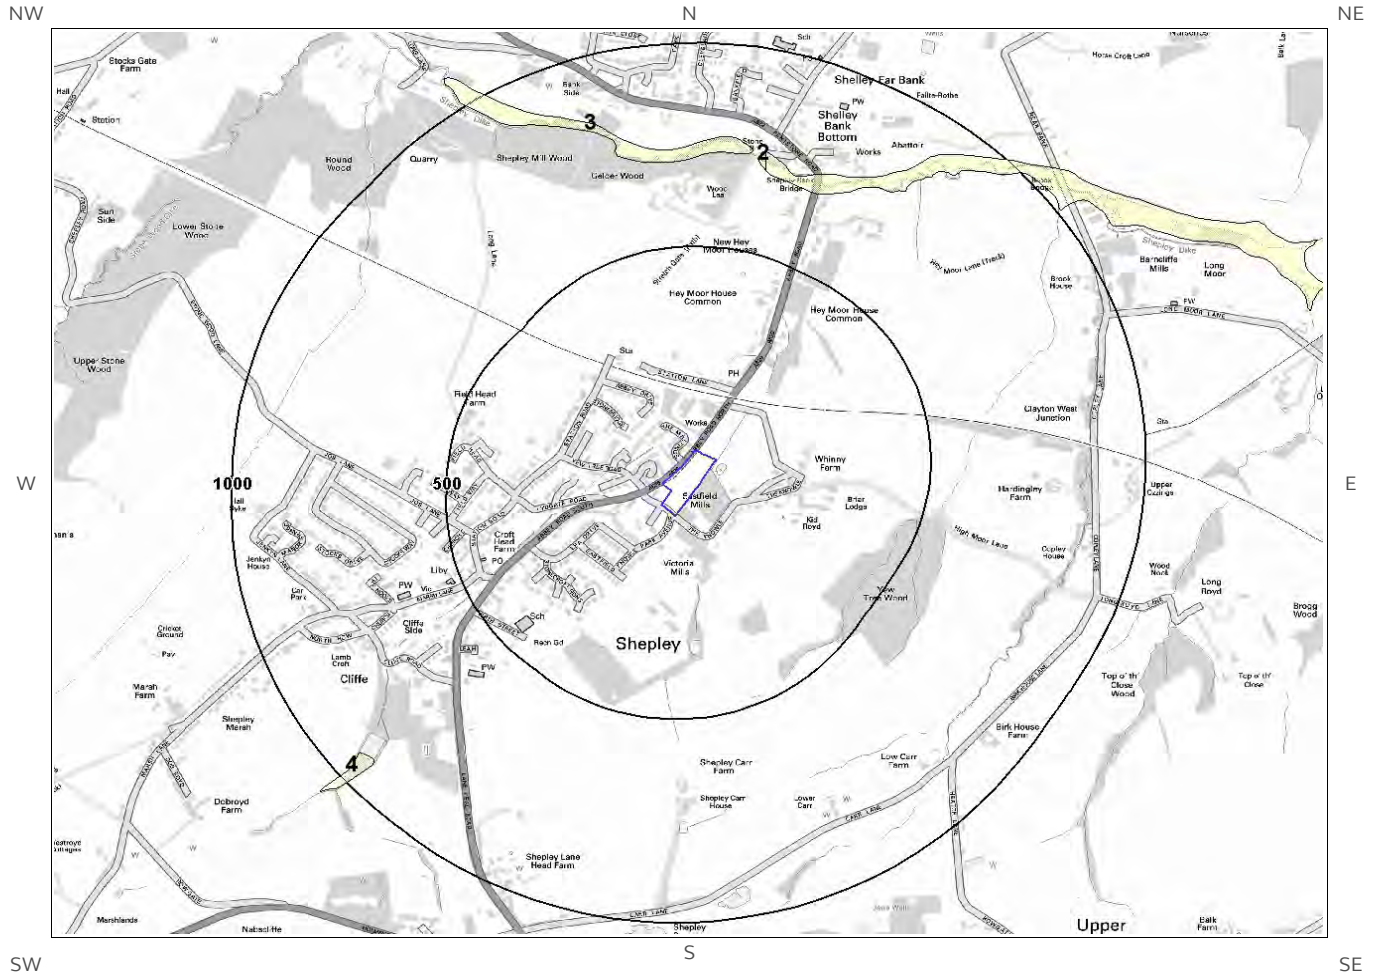

Artificial Ground Legend

© Crown copyright and database rights 2019.
Ordnance Survey licence 100035207.



1.2 Superficial Deposits and Landslips

The following geological information represented on the mapping is derived from 1:10,000 scale BGS Geological mapping

1.2.1 Superficial Deposits/ Drift Geology

Are there any records of Superficial Deposits/ Drift Geology within 500m of the study site boundary at 1:10,000 scale? No

Database searched and no data found.

1.2.2 Landslip


Are there any records of Landslip within 500m of the study site boundary at 1:10,000 scale? No

Database searched and no data found.

The geology map for the site and surrounding area are extracted from the BGS Digital Geological Map of Great Britain at 1:10,000 scale


This Geology shows the main components as discrete layers, these are: Artificial / Made Ground, Superficial / Drift Geology and Landslips. These are all displayed with the BGS Lexicon code for the rock unit and BGS sheet number. Not all of the main geological components have nationwide coverage.

1.3 Bedrock and linear features map (1:10,000 scale)

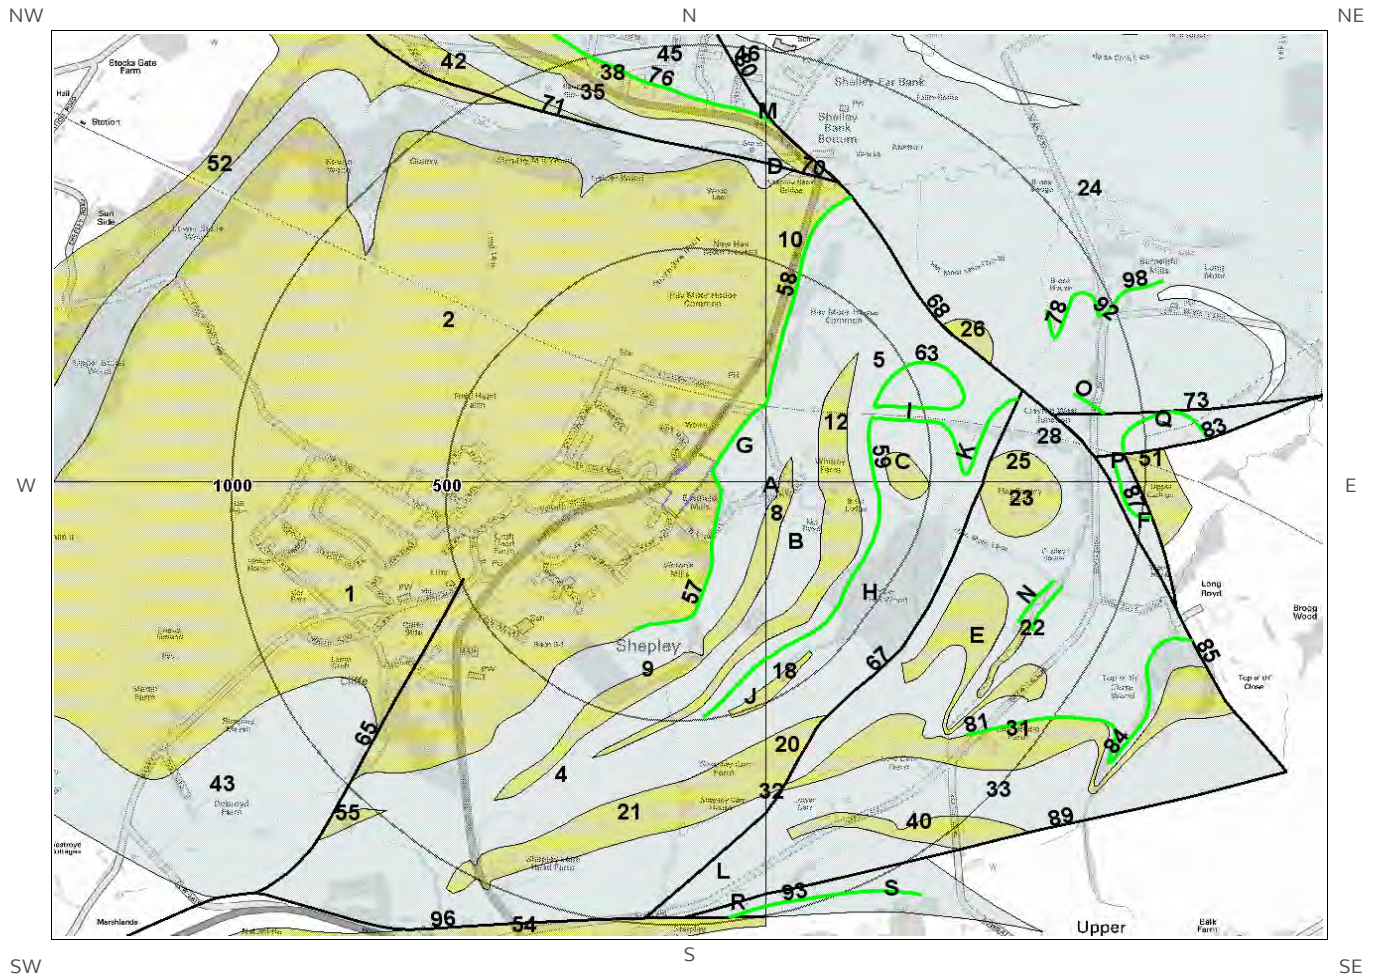

Bedrock and linear features Legend

© Crown copyright and database rights 2019.
Ordnance Survey licence 100035207.



1.3 Bedrock and linear features

The following geological information represented on the mapping is derived from 1:10,000 scale BGS Geological mapping.

1.3.1 Bedrock/ Solid Geology

Records of Bedrock/Solid Geology within 500m of the study site boundary at 1:10,000 scale.

ID	Distance (m)	Direction	LEX Code	Description	Rock Age
1	0.0	On Site	GR-SDST	Grenoside Sandstone - Sandstone	Langsettian Sub-age
2	0.0	On Site	GR-SDST	Grenoside Sandstone - Sandstone	Langsettian Sub-age
3G	3.0	SE	PLCM-MDSS	Pennine Lower Coal Measures Formation - Mudstone, Siltstone And Sandstone	Langsettian Sub-age
4	28.0	SE	PLCM-MDSI	Pennine Lower Coal Measures Formation - Mudstone And Siltstone	Langsettian Sub-age
5	115.0	E	PLCM-MDSS	Pennine Lower Coal Measures Formation - Mudstone, Siltstone And Sandstone	Langsettian Sub-age
6A	124.0	SE	PLCM-MDSI	Pennine Lower Coal Measures Formation - Mudstone And Siltstone	Langsettian Sub-age
7A	153.0	E	PF-SDST	Penistone Flags - Sandstone	Langsettian Sub-age
8	153.0	E	PF-SDST	Penistone Flags - Sandstone	Langsettian Sub-age
9	162.0	SE	PF-SDST	Penistone Flags - Sandstone	Langsettian Sub-age
10	182.0	NE	GR-SDST	Grenoside Sandstone - Sandstone	Langsettian Sub-age
11B	184.0	E	PLCM-MDSI	Pennine Lower Coal Measures Formation - Mudstone And Siltstone	Langsettian Sub-age
12	237.0	E	PF-SDST	Penistone Flags - Sandstone	Langsettian Sub-age
13B	243.0	E	PF-SDST	Penistone Flags - Sandstone	Langsettian Sub-age
14H	322.0	E	PLCM-MDSI	Pennine Lower Coal Measures Formation - Mudstone And Siltstone	Langsettian Sub-age
15	328.0	SE	PF-SDST	Penistone Flags - Sandstone	Langsettian Sub-age
16C	391.0	E	PF-SDST	Penistone Flags - Sandstone	Langsettian Sub-age
17C	404.0	E	PF-SDST	Penistone Flags - Sandstone	Langsettian Sub-age
18	450.0	SE	PF-SDST	Penistone Flags - Sandstone	Langsettian Sub-age
19J	461.0	SE	PF-SDST	Penistone Flags - Sandstone	Langsettian Sub-age

1.3.2 Linear features

Are there any records of linear features within 500m of the study site boundary at 1:10,000 scale? Yes

ID	Distance (m)	Direction	Category Description	Feature Description
56G	3.0	SE	ROCK	Coal seam, inferred
57	28.0	SE	ROCK	Coal seam, inferred ()
58	182.0	NE	ROCK	Coal seam, inferred
59	359.0	E	ROCK	Coal seam, inferred


ID	Distance (m)	Direction	Category Description	Feature Description
60H	373.0	E	ROCK	Coal seam, inferred ()
61I	379.0	E	ROCK	Coal seam, observed
62I	391.0	E	ROCK	Coal seam, observed
63	391.0	E	ROCK	Coal seam, inferred
64J	406.0	SE	ROCK	Coal seam, inferred ()
65	492.0	W	FAULT	Normal fault, inferred; crossmarks on downthrow side

The geology map for the site and surrounding area are extracted from the BGS Digital Geological Map of great Britain at 1:10,000 scale.


This Geology shows the main components as discrete layers, these are: Bedrock/ Solid Geology and linear features such as faults. These are all displayed with the BGS Lexicon code for the rock unit and BGS sheet number. Not all of the main geological components have nationwide coverage.

2 Geology 1:50,000 Scale

2.1 Artificial Ground map

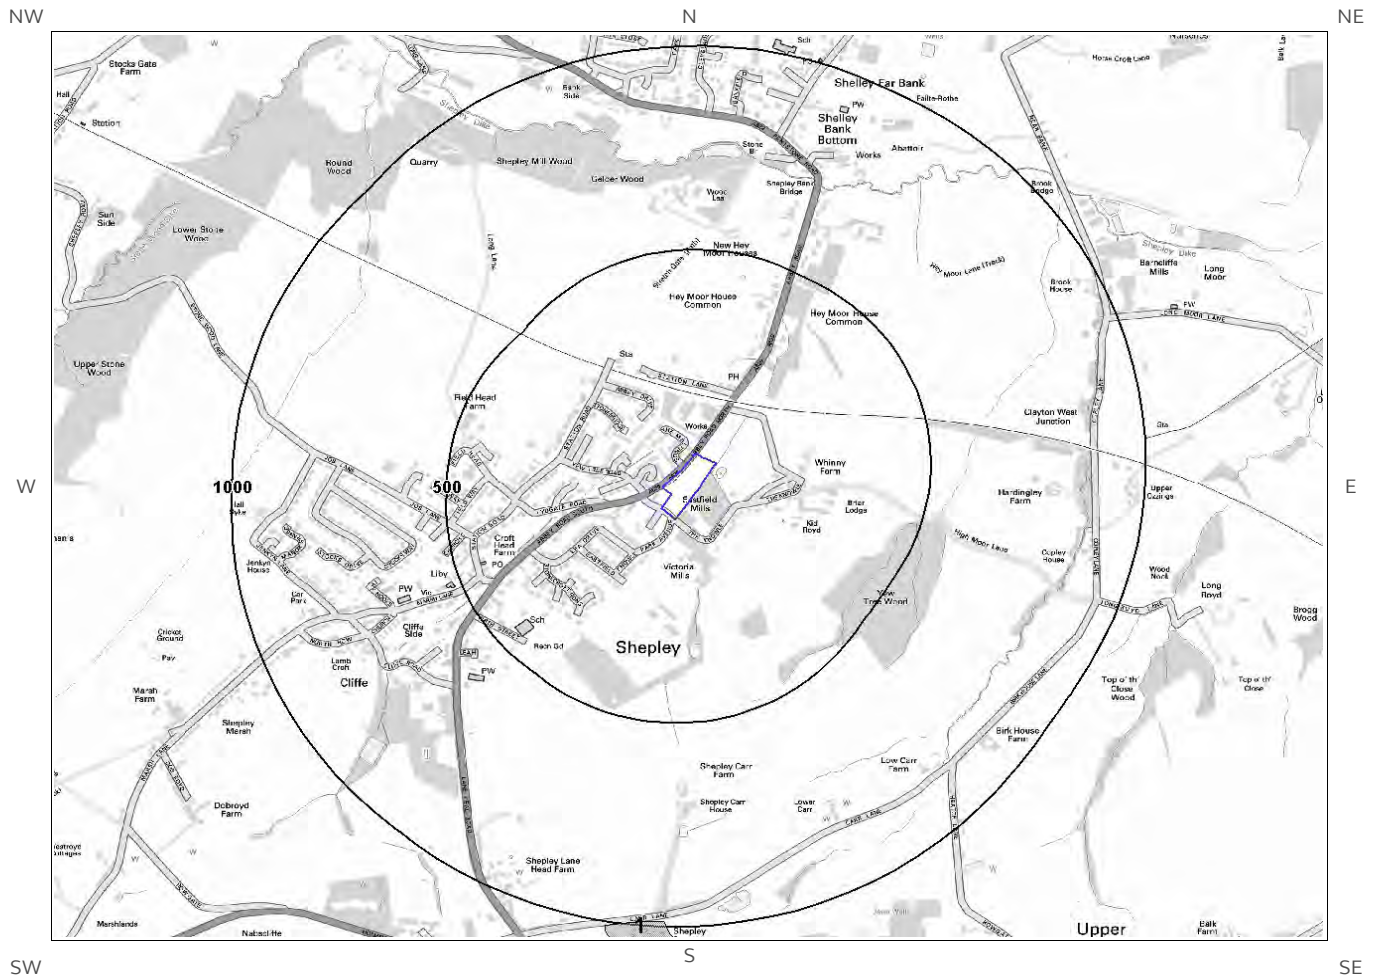

© Crown copyright and database rights 2019.
Ordnance Survey licence 100035207.

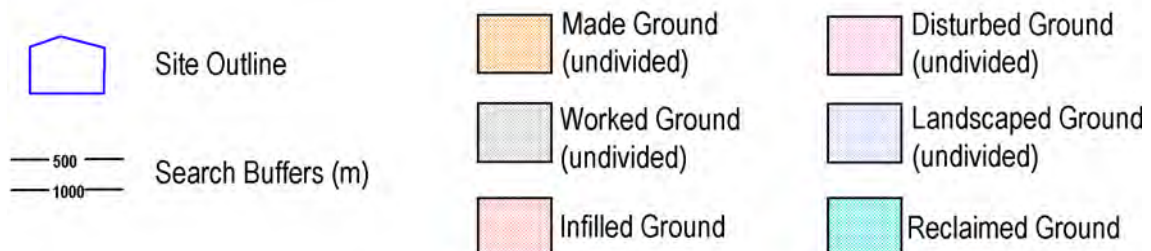

2. Geology 1:50,000 scale

2.1 Artificial Ground

The following geological information represented on the mapping is derived from 1:50,000 scale BGS Geological mapping, Sheet No: 086

2.1.1 Artificial/ Made Ground



Are there any records of Artificial/ Made Ground within 500m of the study site boundary? No

Database searched and no data found.

2.1.2 Permeability of Artificial Ground

Are there any records relating to permeability of artificial ground within the study site boundary? No

Database searched and no data found.



2.2 Superficial Deposits and Landslips

2.2.1 Superficial Deposits/ Drift Geology

Are there any records of Superficial Deposits/ Drift Geology within 500m of the study site boundary? No

Database searched and no data found.

2.2.2 Permeability of Superficial Ground

Are there any records relating to permeability of superficial ground within the study site boundary? No

Database searched and no data found.

2.2.3 Landslip

Are there any records of Landslip within 500m of the study site boundary? No

Database searched and no data found.

The geology map for the site and surrounding area are extracted from the BGS Digital Geological Map of Great Britain at 1:50,000 scale.


This Geology shows the main components as discrete layers, there are: Artificial/ Made Ground, Superficial/ Drift Geology and Landslips. These are all displayed with the BGS Lexicon code for the rock unit and BGS sheet number. Not all of the main geological components have nationwide coverage.

2.2.4 Landslip Permeability

Are there any records relating to permeability of landslips within the study site boundary? No

Database searched and no data found.


2.3 Bedrock and linear features map (1:50,000 scale)

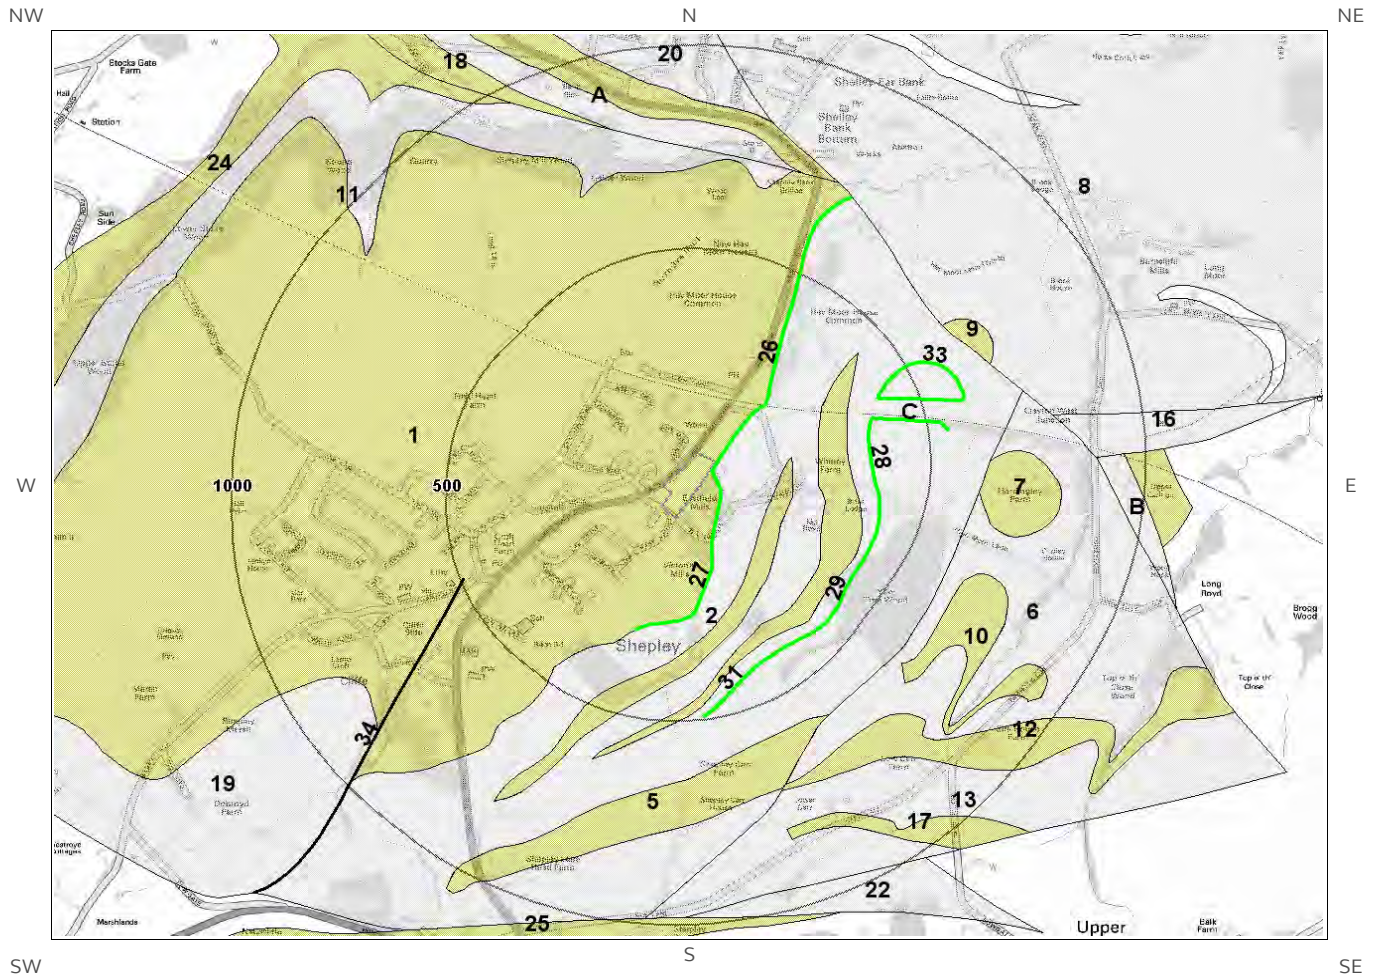

© Crown copyright and database rights 2019.
Ordnance Survey licence 100035207.



Site Outline



Search Buffers (m)

2.3 Bedrock, Solid Geology & linear features

The following geological information represented on the mapping is derived from 1:50,000 scale BGS Geological mapping, Sheet No: 086

2.3.1 Bedrock/Solid Geology

Records of Bedrock/Solid Geology within 500m of the study site boundary:

ID	Distance	Direction	LEX Code	Rock Description	Rock Age
1	0.0	On Site	GR-SDST	GRENOSIDE SANDSTONE - SANDSTONE	WESTPHALIAN
2	3.0	SE	PLCM-MDSS	PENNINE LOWER COAL MEASURES FORMATION - MUDSTONE, SILTSTONE AND SANDSTONE	WESTPHALIAN
3	153.0	E	PF-SDST	PENISTONE FLAGS - SANDSTONE	WESTPHALIAN
4	238.0	E	PF-SDST	PENISTONE FLAGS - SANDSTONE	WESTPHALIAN

2.3.2 Permeability of Bedrock Ground

Are there any records relating to permeability of bedrock ground within the study site boundary? Yes

Distance	Direction	Flow Type	Maximum Permeability	Minimum Permeability
0.0	On Site	Fracture	High	Moderate
0.0	On Site	Fracture	High	Moderate
3.0	SE	Fracture	High	Low
28.0	SE	Fracture	High	Low

2.3.3 Linear features

Are there any records of linear features within 500m of the study site boundary? Yes

ID	Distance	Direction	Category Description	Feature Description
26	3.0	SE	ROCK	Coal seam, inferred
27	28.0	SE	ROCK	Coal seam, inferred
28	359.0	E	ROCK	Coal seam, inferred
29	373.0	E	ROCK	Coal seam, inferred
30C	378.0	E	ROCK	Coal seam, observed
31	405.0	SE	ROCK	Coal seam, inferred
32C	406.0	E	ROCK	Coal seam, observed
33	406.0	E	ROCK	Coal seam, inferred
34	492.0	W	FAULT	Fault, inferred

The geology map for the site and surrounding area are extracted from the BGS Digital Geological Map of Great Britain at 1:50,000 scale.

This Geology shows the main components as discrete layers, these are: Bedrock/Solid Geology and linear features such as faults. These are all displayed with the BGS Lexicon code for the rock unit and BGS sheet number. Not all of the main geological components have nation wide coverage.

3 Radon Data

3.1 Radon Affected Areas


Is the property in a Radon Affected Area as defined by the Health Protection Agency (HPA) and if so what percentage of homes are above the Action Level? The property is not in a Radon Affected Area, as less than 1% of properties are above the Action Level.

The radon data in this report is supplied by the BGS/Public Health England and is the definitive map of Radon Affected Areas in Great Britain and Northern Ireland. The dataset was created using long-term radon measurements in over 479,000 homes across Great Britain and 23,000 homes across Northern Ireland, combined with geological data. The dataset is considered accurate to 50m to allow for the margin of error in geological lines, and the findings of this report supercede any answer given in the less accurate Indicative Atlas of Radon in Great Britain, which simplifies the data to give the highest risk within any given 1km grid square. As such, the radon atlas is considered indicative, whereas the data given in this report is considered definitive.

3.2 Radon Protection


Is the property in an area where Radon Protection are required for new properties or extensions to existing ones as described in publication BR211 by the Building Research Establishment? No radon protective measures are necessary.

4 Ground Workings map

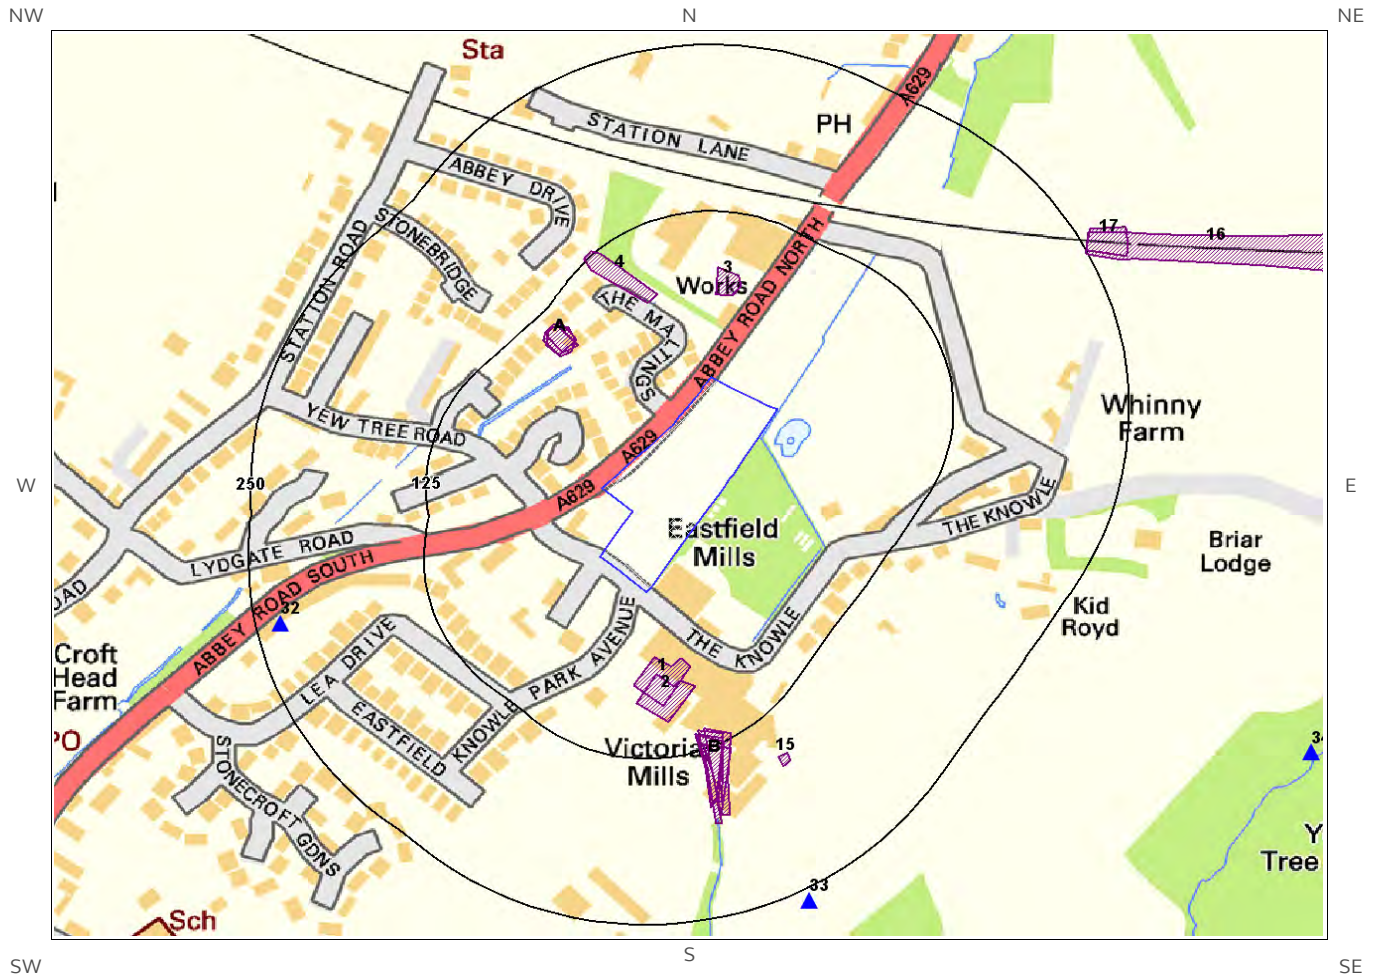

Ground Workings Legend

© Crown copyright and database rights 2019.
Ordnance Survey licence 100035207.

- | | | | |
|---|--------------------|---|----------------------------------|
|  | Site Outline |  | Historic Surface Ground Workings |
|  | Search Buffers (m) |  | Historic Underground Workings |
| | |  | Current Ground Workings |

4 Ground Workings

4.1 Historical Surface Ground Working Features derived from Historical Mapping

This dataset is based on Groundsure's unique Historical Land Use Database derived from 1:10,560 and 1:10,000 scale historical mapping

Are there any Historical Surface Ground Working Features within 250m of the study site boundary? Yes

ID	Distance (m)	Direction	NGR	Use	Date
1	49.0	S	419801 409844	Pond	1970
2	62.0	S	419806 409831	Pond	1892
3	62.0	N	419850 410145	Unspecified Pit	1968
4	72.0	NW	419774 410148	Refuse Heap	1904
5A	90.0	NW	419731 410100	Unspecified Heap	1948
6A	90.0	NW	419731 410100	Unspecified Heap	1951
7A	94.0	NW	419731 410103	Unspecified Heap	1932
8A	94.0	NW	419731 410103	Unspecified Heap	1932
9B	110.0	S	419838 409780	Pond	1970
10B	111.0	S	419842 409776	Pond	1955
11B	112.0	S	419836 409777	Reservoir	1904
12B	112.0	S	419836 409777	Reservoir	1948
13B	113.0	S	419837 409770	Reservoir	1932
14B	121.0	S	419842 409769	Pond	1892
15	155.0	SE	419890 409785	Reservoir	1955
16	248.0	NE	420236 410164	Cuttings	1948
17	250.0	NE	420119 410174	Cuttings	1951

4.2 Historical Underground Working Features derived from Historical Mapping

This data is derived from the Groundsure unique Historical Land Use Database. It contains data derived from 1:10,000 and 1:10,560 historical Ordnance Survey Mapping and includes some natural topographical features (Shake Holes for example) as well as manmade features that may have implications for ground stability. Underground and mining features have been identified from surface features such as shafts. The distance that these extend underground is not shown.

Are there any Historical Underground Working Features within 1000m of the study site boundary? Yes

The following Historical Underground Working Features are provided by Groundsure:

ID	Distance (m)	Direction	NGR	Use	Date
Not shown	579.0	E	420468 410026	Unspecified Old Shaft	1948
Not shown	579.0	E	420467 410030	Unspecified Old Shaft	1951
Not shown	590.0	SE	420383 409726	Coal Shaft	1951
Not shown	592.0	SE	420384 409724	Coal Shaft	1948
Not shown	592.0	E	420483 410028	Unspecified Disused Shaft	1967
Not shown	596.0	E	420484 410100	Unspecified Old Level	1951
Not shown	628.0	E	420514 410100	Unspecified Old Level	1948
Not shown	628.0	E	420514 410102	Unspecified Old Level	1951
Not shown	726.0	SE	420259 409300	Disused Colliery	1951
Not shown	729.0	SE	420234 409281	Disused Colliery	1948
Not shown	733.0	SE	420172 409280	Unspecified Old Shaft	1951
Not shown	734.0	SE	420171 409278	Unspecified Old Shaft	1948
Not shown	758.0	SE	420277 409318	Unspecified Old Level	1951
Not shown	762.0	SE	420278 409314	Unspecified Old Level	1948

4.3 Current Ground Workings

This dataset is derived from the BGS BRITPITS database covering active; inactive mines; quarries; oil wells; gas wells and mineral wharves; and rail deposits throughout the British Isles.

Are there any BGS Current Ground Workings within 1000m of the study site boundary? Yes

The following Current Ground Workings information is provided by British Geological Survey:


ID	Distance (m)	Direction	NGR	Commodity Produced	Pit Name	Type of working	Status
32	233.0	W	419531 409887	Sandstone	Shepley	A surface mineral working. It may be termed Quarry, Sand Pit, Clay Pit or Opencast Coal Site	Ceased
33	259.0	SE	419907 409679	Coal, Deep	Healey House Pit	Working is wholly underground, access by shaft, adit or drift. Working may be termed Colliery, Mine, Drift Mine, Slant, Level, Adit or Ingoing Eye (Ingaun Ee - Scots)	Ceased
34	459.0	SE	420265 409790	Sandstone	Yew Tree Wood	A surface mineral working. It may be termed Quarry, Sand Pit, Clay Pit or Opencast Coal Site	Ceased
Not shown	589.0	SE	420384 409735	Coal, Deep	Yew Tree Wood Pit	Working is wholly underground, access by shaft, adit or drift. Working may be termed Colliery, Mine, Drift Mine, Slant, Level, Adit or Ingoing Eye (Ingaun Ee - Scots)	Ceased
Not shown	597.0	E	420482 410035	Coal, Deep	Hardenley Pit	Working is wholly underground, access by shaft, adit or drift. Working may be termed Colliery, Mine, Drift Mine, Slant, Level, Adit or Ingoing Eye (Ingaun Ee - Scots)	Ceased
Not shown	632.0	E	420515 410101	Coal, Deep	Hardenley Mine	Working is wholly underground, access by shaft, adit or drift. Working may be termed Colliery, Mine, Drift Mine, Slant, Level, Adit or Ingoing Eye (Ingaun Ee - Scots)	Ceased
Not shown	690.0	N	419633 410731	Sandstone	Gelder Wood	A surface mineral working. It may be termed Quarry, Sand Pit, Clay Pit or Opencast Coal Site	Ceased
Not shown	739.0	SE	420178 409281	Coal, Deep	Low Carr Colliery	Working is wholly underground, access by shaft, adit or drift. Working may be termed Colliery, Mine, Drift Mine, Slant, Level, Adit or Ingoing Eye (Ingaun Ee - Scots)	Ceased
Not shown	768.0	SE	420281 409318	Coal, Deep	Low Carr Colliery	Working is wholly underground, access by shaft, adit or drift. Working may be termed Colliery, Mine, Drift Mine, Slant, Level, Adit or Ingoing Eye (Ingaun Ee - Scots)	Ceased
Not shown	822.0	N	419827 410894	Sandstone	Town's	A surface mineral working. It may be termed Quarry, Sand Pit, Clay Pit or Opencast Coal Site	Ceased
Not shown	833.0	N	419706 410895	Sandstone	Shelley Far Bank	A surface mineral working. It may be termed Quarry, Sand Pit, Clay Pit or Opencast Coal Site	Ceased
Not shown	948.0	NW	419255 410820	Sandstone	Long Lane Quarry	A surface mineral working. It may be termed Quarry, Sand Pit, Clay Pit or Opencast Coal Site	Ceased
Not shown	971.0	N	419543 410998	Sandstone	Town's	A surface mineral working. It may be termed Quarry, Sand Pit, Clay Pit or Opencast Coal Site	Ceased

5 Mining, Extraction & Natural Cavities map



Mining, Extraction and Natural Cavities Legend

© Crown copyright and database rights 2019.
Ordnance Survey licence 100035207.

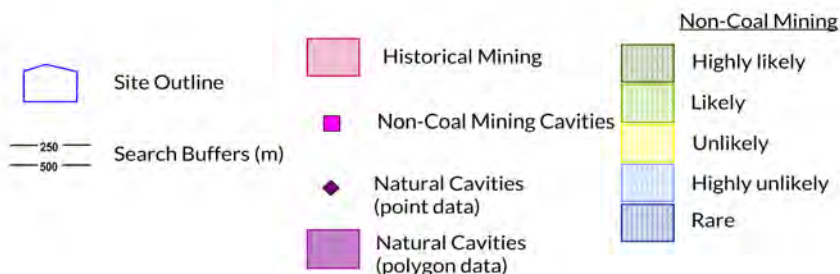

5 Mining, Extraction & Natural Cavities

5.1 Historical Mining

This dataset is derived from Groundsure unique Historical Land-use Database that are indicative of mining or extraction activities.

Are there any Historical Mining areas within 1000m of the study site boundary? Yes

The following Historical Mining information is provided by Groundsure:

ID	Distance (m)	Direction	NGR	Details	Date
1A	579.0	E	420468 410026	Unspecified Old Shaft	1948
2A	579.0	E	420467 410030	Unspecified Old Shaft	1951
3B	590.0	SE	420383 409726	Coal Shaft	1951
4B	592.0	SE	420384 409724	Coal Shaft	1948
5A	592.0	E	420483 410028	Unspecified Disused Shaft	1967
6	596.0	E	420484 410100	Unspecified Old Level	1951
7C	628.0	E	420514 410100	Unspecified Old Level	1948
8C	628.0	E	420514 410102	Unspecified Old Level	1951
9	726.0	SE	420259 409300	Disused Colliery	1951
Not shown	729.0	SE	420234 409281	Disused Colliery	1948
Not shown	733.0	SE	420172 409280	Unspecified Old Shaft	1951
Not shown	734.0	SE	420171 409278	Unspecified Old Shaft	1948
Not shown	758.0	SE	420277 409318	Unspecified Old Level	1951
Not shown	762.0	SE	420278 409314	Unspecified Old Level	1948

5.2 Coal Mining

This dataset provides information as to whether the study site lies within a known coal mining affected area as defined by the coal authority.

Are there any Coal Mining areas within 1000m of the study site boundary? Yes

The following Coal Mining information provided by the Coal Authority is not represented on Mapping:

Distance (m)	Direction	Details
0.0	On Site	The site lies in or in proximity to the coal mining reporting area as defined by the Coal Authority

5.3 Johnson Poole and Bloomer

This dataset provides information as to whether the study site lies within an area where JPB hold information relating to mining.

Are there any JPB Mining areas within 1000m of the study site boundary? No

The following information provided by JPB is not represented on mapping: Database searched and no data found.

5.4 Non-Coal Mining

This dataset provides information as to whether the study site lies within an area which may have been subject to non-coal historic mining.

Are there any Non-Coal Mining areas within 1000m of the study site boundary? No

Database searched and no data found.

5.5 Non-Coal Mining Cavities

This dataset provides information from the Peter Brett Associates (PBA) mining cavities database (compiled for the national study entitled "Review of mining instability in Great Britain, 1990" PBA has also continued adding to this database) on mineral extraction by mining.

Are there any Non-Coal Mining cavities within 1000m of the study site boundary? No

Database searched and no data found.

5.6 Natural Cavities

This dataset provides information based on the Peter Brett Associates natural cavities database. The dataset is made up of points and polygons. Where polygons are used these represent an area in which it is expected the cavities could be found. It does not indicate that cavities are present everywhere within the polygon, and caution should be used in the interpretation of this data.

Are there any Natural Cavities within 1000m of the study site boundary? No

Database searched and no data found.

5.7 Brine Extraction

This data provides information from the Cheshire Brine Subsidence Compensation Board.

Are there any Brine Extraction areas within 1000m of the study site boundary? No

Database searched and no data found.

5.8 Gypsum Extraction

This dataset provides information on Gypsum extraction from British Gypsum records.

Are there any Gypsum Extraction areas within 1000m of the study site boundary? No

Database searched and no data found.

5.9 Tin Mining

This dataset provides information on tin mining areas and is derived from tin mining records. This search is based upon postcode information to a sector level..

Are there any Tin Mining areas within 1000m of the study site boundary? No

Database searched and no data found.

5.10 Clay Mining


This dataset provides information on Kaolin and Ball Clay mining from relevant mining records.

Are there any Clay Mining areas within 1000m of the study site boundary? No


Database searched and no data found.

6 Natural Ground Subsidence

6.1 Shrink-Swell Clay map

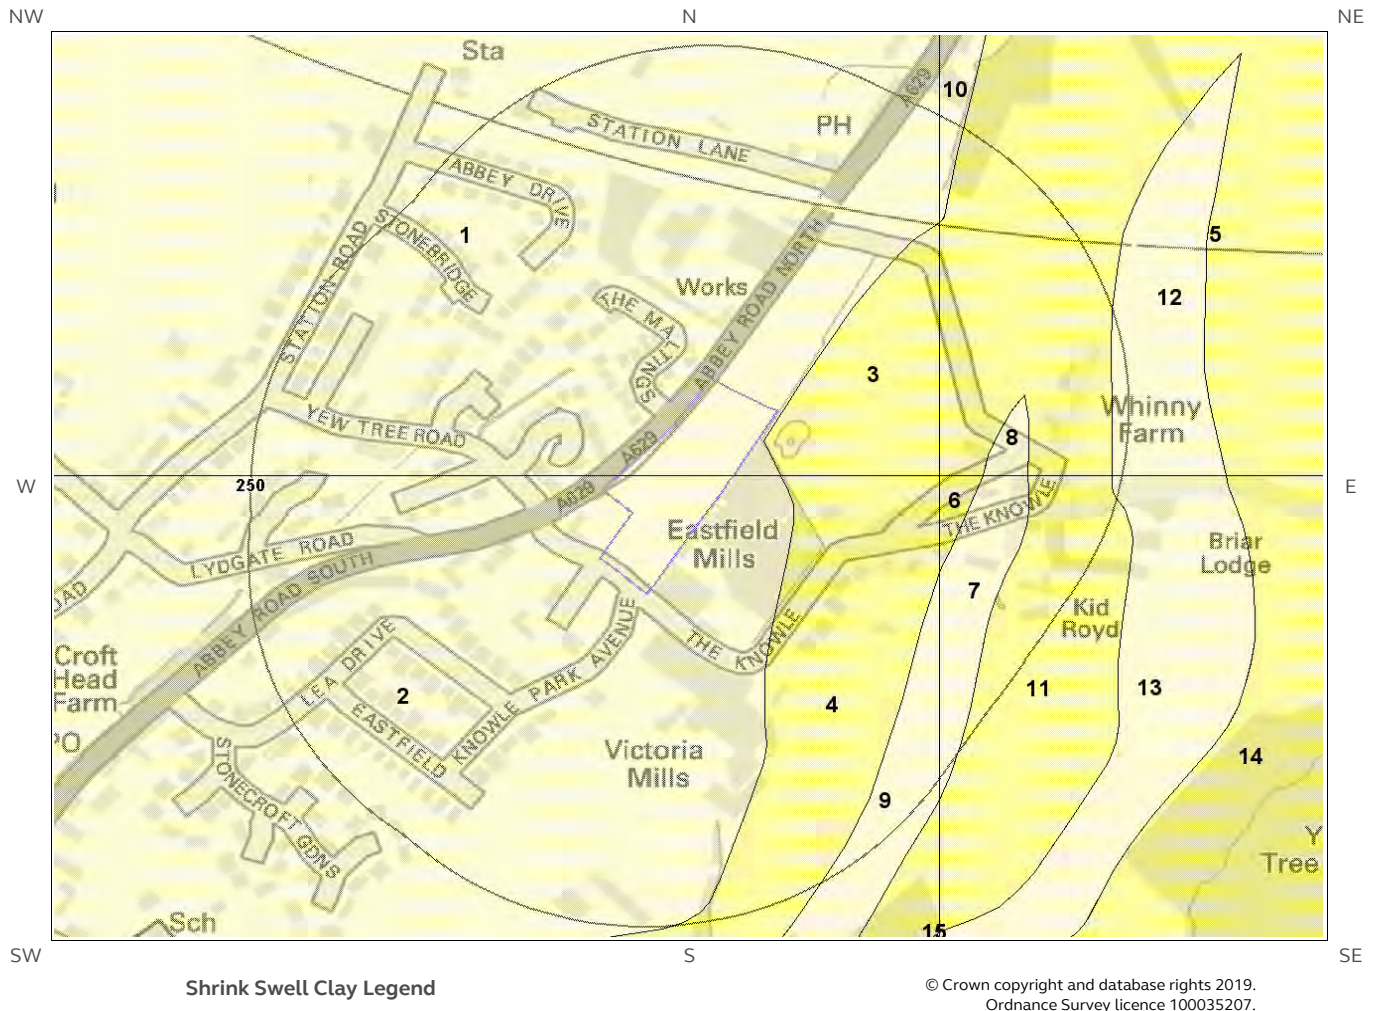

6.2 Landslides map

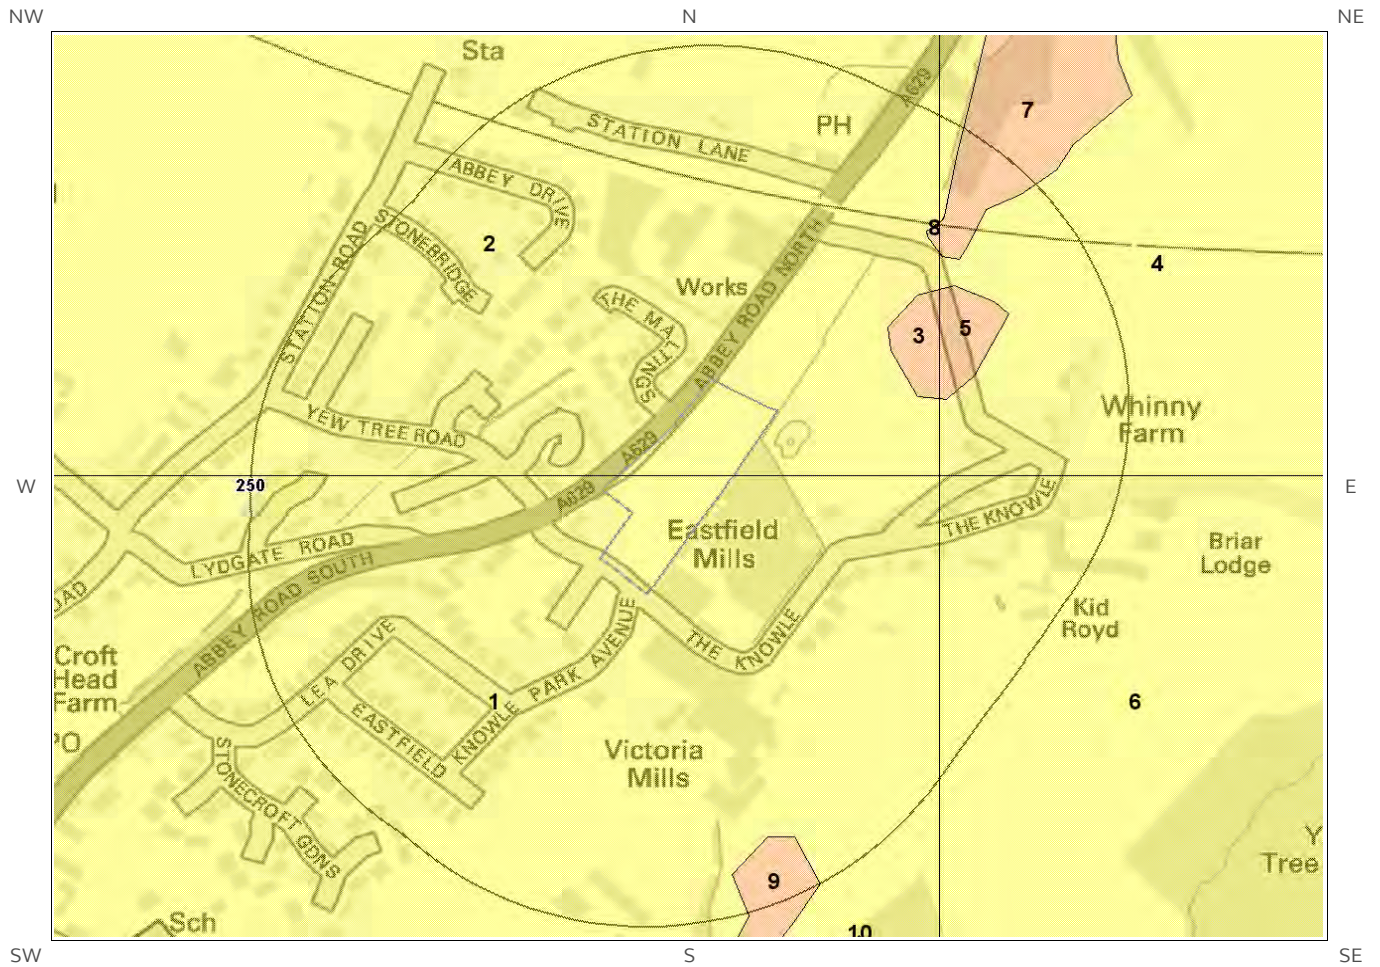


Landslides Legend


© Crown copyright and database rights 2019.
Ordnance Survey licence 100035207.



6.3 Ground Dissolution of Soluble Rocks map

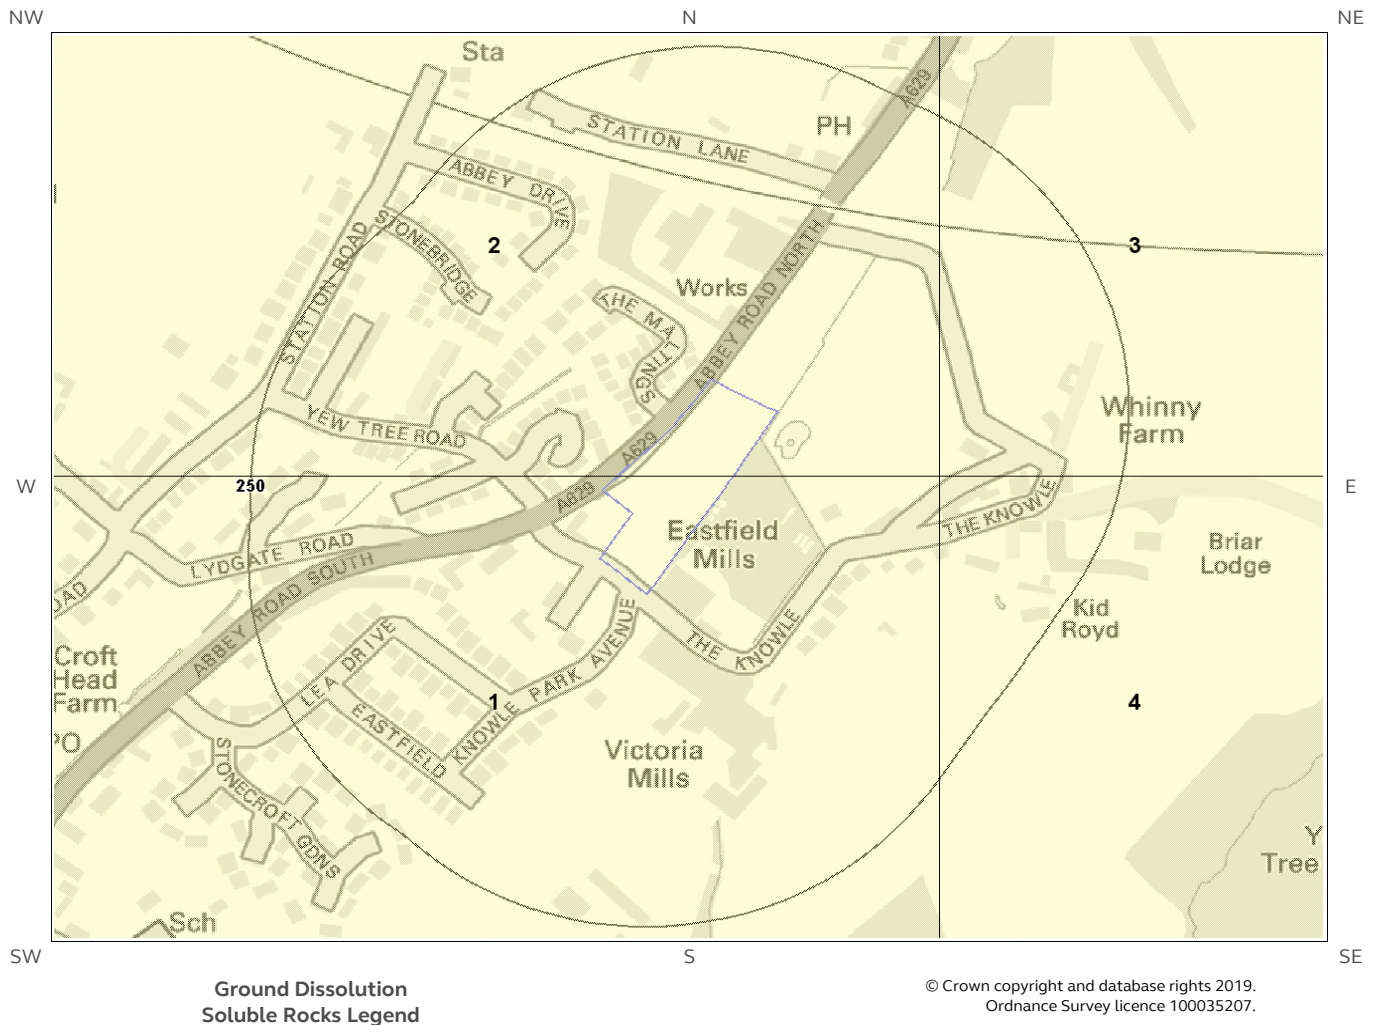

6.4 Compressible Deposits map

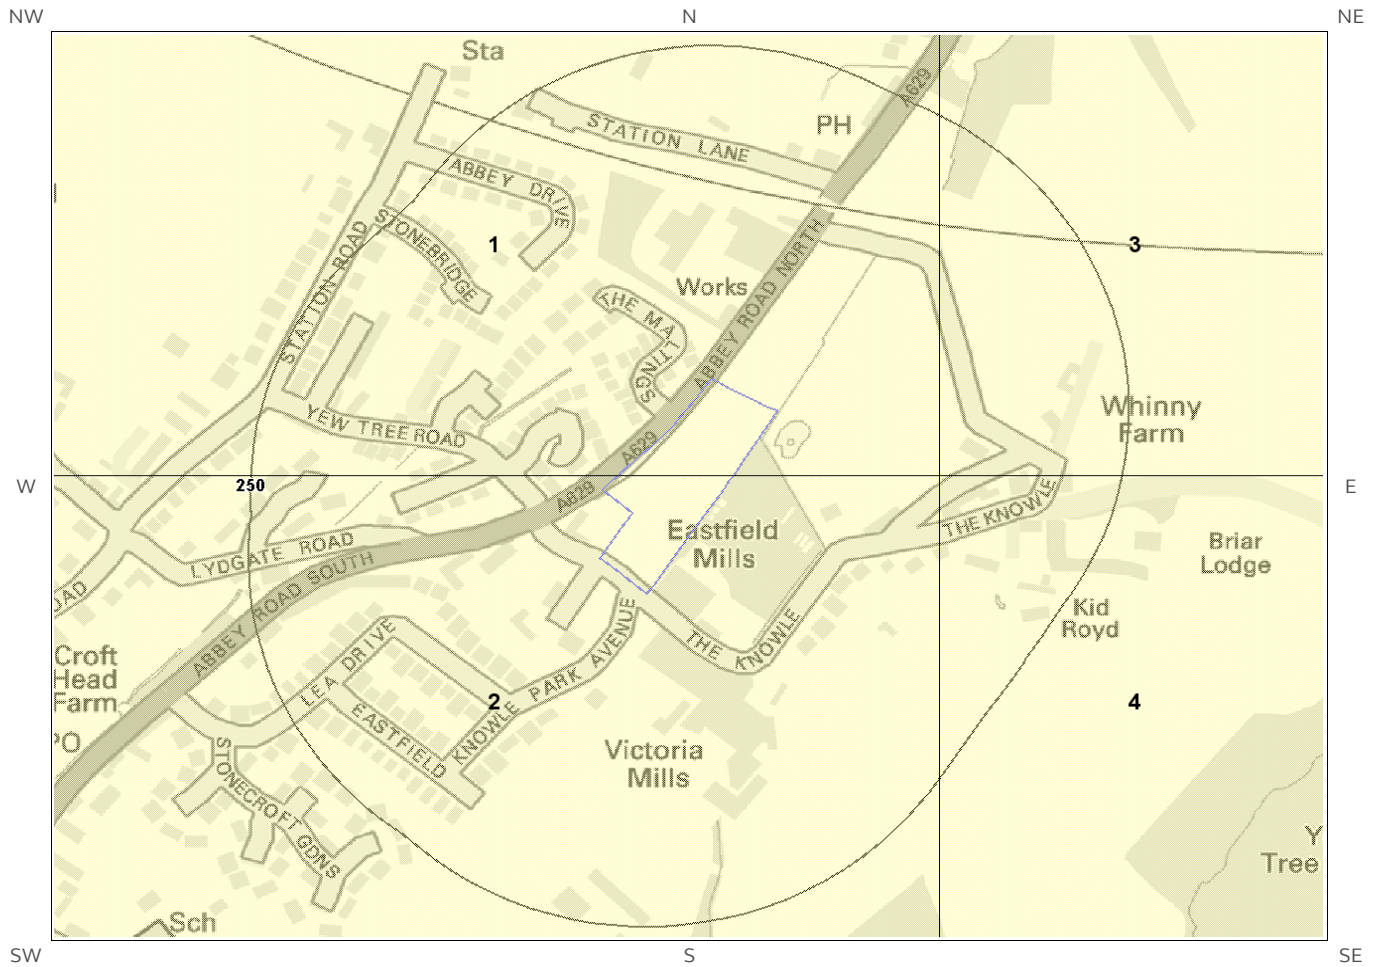


Compressible Deposits Legend

© Crown copyright and database rights 2019.
Ordnance Survey licence 100035207.



6.5 Collapsible Deposits map

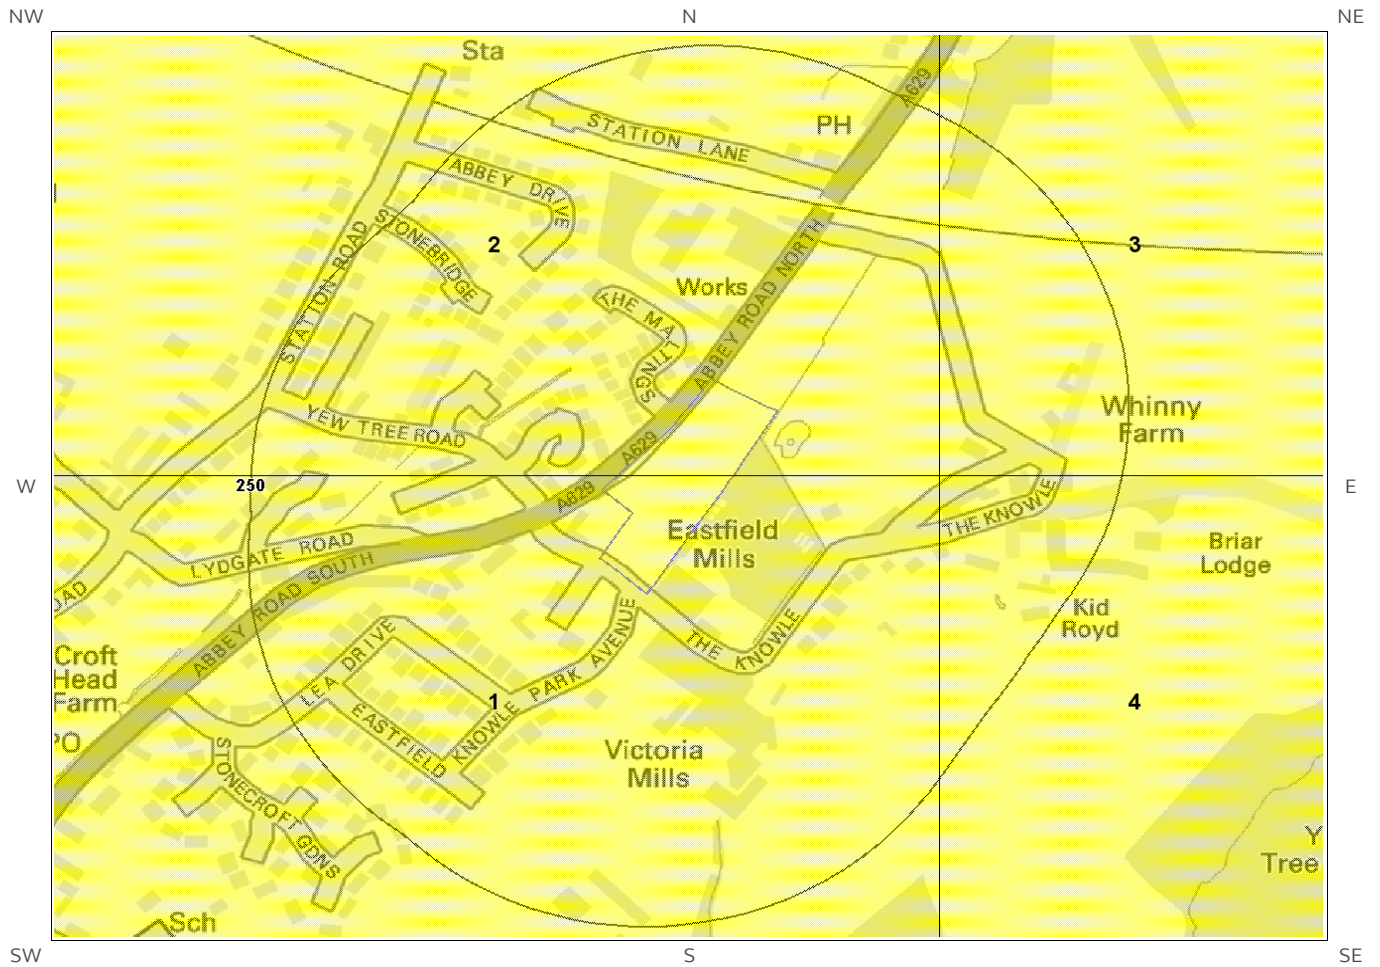


Collapsible Deposits Legend

© Crown copyright and database rights 2019.
Ordnance Survey licence 100035207.



6.6 Running Sand map

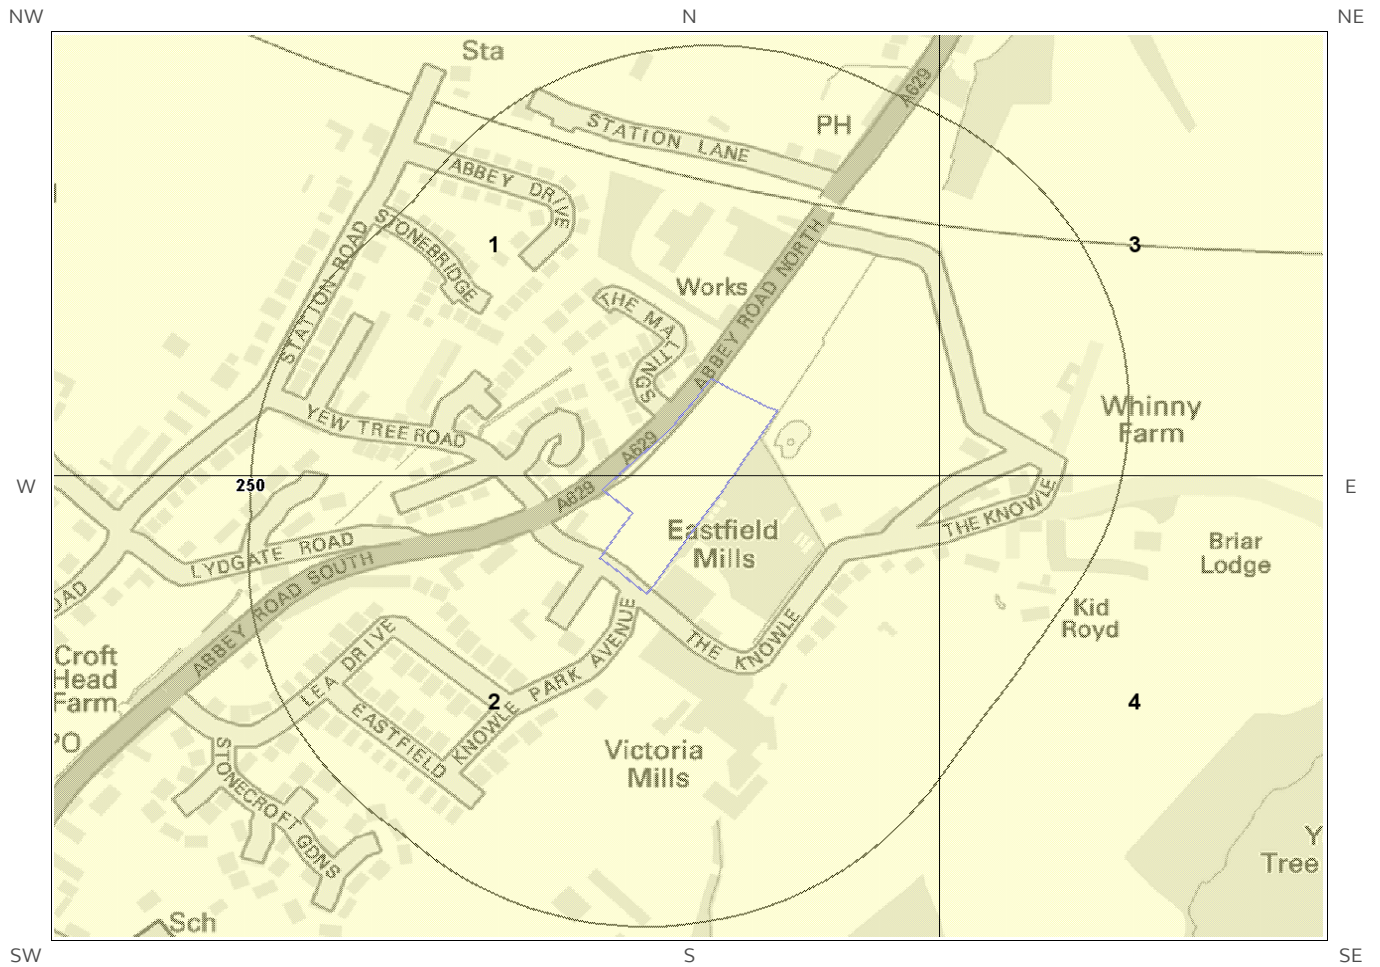

Running Sand Legend

© Crown copyright and database rights 2019.
Ordnance Survey licence 100035207.



6 Natural Ground Subsidence

The National Ground Subsidence rating is obtained through the 6 natural ground stability hazard datasets, which are supplied by the British Geological Survey (BGS).

The following GeoSure data represented on the mapping is derived from the BGS Digital Geological map of Great Britain at 1:50,000 scale.

What is the maximum hazard rating of natural subsidence within the study site* boundary? Very Low

6.1 Shrink-Swell Clays

The following Shrink Swell information provided by the British Geological Survey:

ID	Distance (m)	Direction	Hazard Rating	Details
1	0.0	On Site	Negligible	Ground conditions predominantly non-plastic. No special actions required to avoid problems due to shrink-swell clays. No special ground investigation required, and increased construction costs or increased financial risks are unlikely likely due to potential problems with shrink-swell clays.
2	0.0	On Site	Negligible	Ground conditions predominantly non-plastic. No special actions required to avoid problems due to shrink-swell clays. No special ground investigation required, and increased construction costs or increased financial risks are unlikely likely due to potential problems with shrink-swell clays.
3	3.0	SE	Very Low	Ground conditions predominantly low plasticity. No special actions required to avoid problems due to shrink-swell clays. No special ground investigation required, and increased construction costs or increased financial risks are unlikely due to potential problems with shrink-swell clays.
4	28.0	SE	Very Low	Ground conditions predominantly low plasticity. No special actions required to avoid problems due to shrink-swell clays. No special ground investigation required, and increased construction costs or increased financial risks are unlikely due to potential problems with shrink-swell clays.

* This includes an automatically generated 50m buffer zone around the site

6.2 Landslides

The following Landslides information provided by the British Geological Survey:

ID	Distance (m)	Direction	Hazard Rating	Details
1	0.0	On Site	Very Low	Slope instability problems are unlikely to be present. No special actions required to avoid problems due to landslides. No special ground investigation required, and increased construction costs or increased financial risks are unlikely due to potential problems with landslides.
2	0.0	On Site	Very Low	Slope instability problems are unlikely to be present. No special actions required to avoid problems due to landslides. No special ground investigation required, and increased construction costs or increased financial risks are unlikely due to potential problems with landslides.

6.3 Ground Dissolution of Soluble Rocks

The following Ground Dissolution information provided by the British Geological Survey:

ID	Distance (m)	Direction	Hazard Rating	Details
1	0.0	On Site	Negligible	Soluble rocks are present, but unlikely to cause problems except under exceptional conditions. No special actions required to avoid problems due to soluble rocks. No special ground investigation required, and increased construction costs or increased financial risks are unlikely due to potential problems with soluble rocks.
2	0.0	On Site	Negligible	Soluble rocks are present, but unlikely to cause problems except under exceptional conditions. No special actions required to avoid problems due to soluble rocks. No special ground investigation required, and increased construction costs or increased financial risks are unlikely due to potential problems with soluble rocks.

6.4 Compressible Deposits

The following Compressible Deposits information provided by the British Geological Survey:

ID	Distance (m)	Direction	Hazard Rating	Details
1	0.0	On Site	Negligible	No indicators for compressible deposits identified. No special actions required to avoid problems due to compressible deposits. No special ground investigation required, and increased construction costs or increased financial risks are unlikely due to potential problems with compressible deposits.
2	0.0	On Site	Negligible	No indicators for compressible deposits identified. No special actions required to avoid problems due to compressible deposits. No special ground investigation required, and increased construction costs or increased financial risks are unlikely due to potential problems with compressible deposits.

6.5 Collapsible Deposits

The following Collapsible Rocks information provided by the British Geological Survey:

ID	Distance (m)	Direction	Hazard Rating	Details
1	0.0	On Site	Very Low	Deposits with potential to collapse when loaded and saturated are unlikely to be present. No special ground investigation required or increased construction costs or increased financial risk due to potential problems with collapsible deposits.
2	0.0	On Site	Very Low	Deposits with potential to collapse when loaded and saturated are unlikely to be present. No special ground investigation required or increased construction costs or increased financial risk due to potential problems with collapsible deposits.

6.6 Running Sands

The following Running Sands information provided by the British Geological Survey:


ID	Distance (m)	Direction	Hazard Rating	Details
1	0.0	On Site	Negligible	No indicators for running sand identified. No special actions required to avoid problems due to running sand. No special ground investigation required, and increased construction costs or increased financial risks are unlikely due to potential problems with running sand.
2	0.0	On Site	Negligible	No indicators for running sand identified. No special actions required to avoid problems due to running sand. No special ground investigation required, and increased construction costs or increased financial risks are unlikely due to potential problems with running sand.

7 Borehole Records map



Borehole Records Legend

© Crown copyright and database rights 2019.
Ordnance Survey licence 100035207.

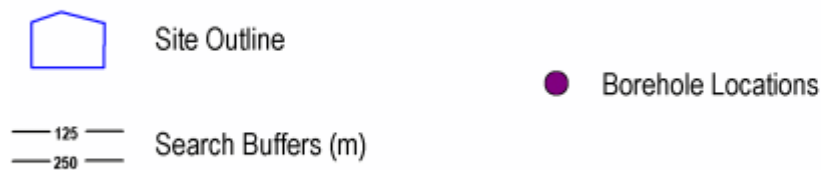

7 Borehole Records

The systematic analysis of data extracted from the BGS Borehole Records database provides the following information.

Records of boreholes within 250m of the study site boundary:

7

ID	Distance (m)	Direction	NGR	BGS Reference	Drilled Length	Borehole Name
1	23.0	NW	419760 410020	SE11SE41	2	YEW TREE RD SHEPLEY TP 3
2	32.0	W	419730 410000	SE11SE42	1	YEW TREE RD SHEPLEY TP 4
3	73.0	NW	419740 410070	SE11SE40	2	YEW TREE RD SHEPLEY TP 2
4	76.0	NW	419690 410020	SE11SE39	2	YEW TREE RD SHEPLEY TP 1
5	84.0	S	419770 409830	SE10NE21	83	SHEPLEY HUDDERSFIELD
6	85.0	S	419820 409831	SE10NE1	93	VICTORIA MILLS SHEPLEY
7	149.0	S	419840 409770	SE10NE20	73	SHEPLEY HUDDERSFIELD

The borehole records are available using the hyperlinks below: Please note that if the donor of the borehole record has requested the information be held as commercial-in-confidence, the additional data will be held separately by the BGS and a formal request must be made for its release.

- #1: scans.bgs.ac.uk/sobi_scans/boreholes/41498
- #2: scans.bgs.ac.uk/sobi_scans/boreholes/41499
- #3: scans.bgs.ac.uk/sobi_scans/boreholes/41497
- #4: scans.bgs.ac.uk/sobi_scans/boreholes/41496
- #5: scans.bgs.ac.uk/sobi_scans/boreholes/40625
- #6: scans.bgs.ac.uk/sobi_scans/boreholes/40605
- #7: scans.bgs.ac.uk/sobi_scans/boreholes/40624

8 Estimated Background Soil Chemistry

Records of background estimated soil chemistry within 250m of the study site boundary:


6

For further information on how this data is calculated and limitations upon its use, please see the Groundsure Geo Insight User Guide, available on request.

Distance (m)	Direction	Sample Type	Arsenic (As)	Cadmium (Cd)	Chromium (Cr)	Nickel (Ni)	Lead (Pb)
0.0	On Site	RuralSoil	15 - 25 mg/kg	<1.8 mg/kg	60 - 90 mg/kg	15 - 30 mg/kg	<100 mg/kg
0.0	On Site	RuralSoil	15 - 25 mg/kg	<1.8 mg/kg	60 - 90 mg/kg	15 - 30 mg/kg	<100 mg/kg
0.0	On Site	RuralSoil	25 - 35 mg/kg	<1.8 mg/kg	60 - 90 mg/kg	15 - 30 mg/kg	<100 mg/kg
29.0	E	RuralSoil	15 - 25 mg/kg	<1.8 mg/kg	60 - 90 mg/kg	15 - 30 mg/kg	<100 mg/kg
36.0	SE	RuralSoil	15 - 25 mg/kg	<1.8 mg/kg	60 - 90 mg/kg	15 - 30 mg/kg	<100 mg/kg
36.0	SE	RuralSoil	15 - 25 mg/kg	<1.8 mg/kg	60 - 90 mg/kg	15 - 30 mg/kg	<100 mg/kg


*As this data is based upon underlying 1:50,000 scale geological information, a 50m buffer has been added to the search radius.

9 Railways and Tunnels map

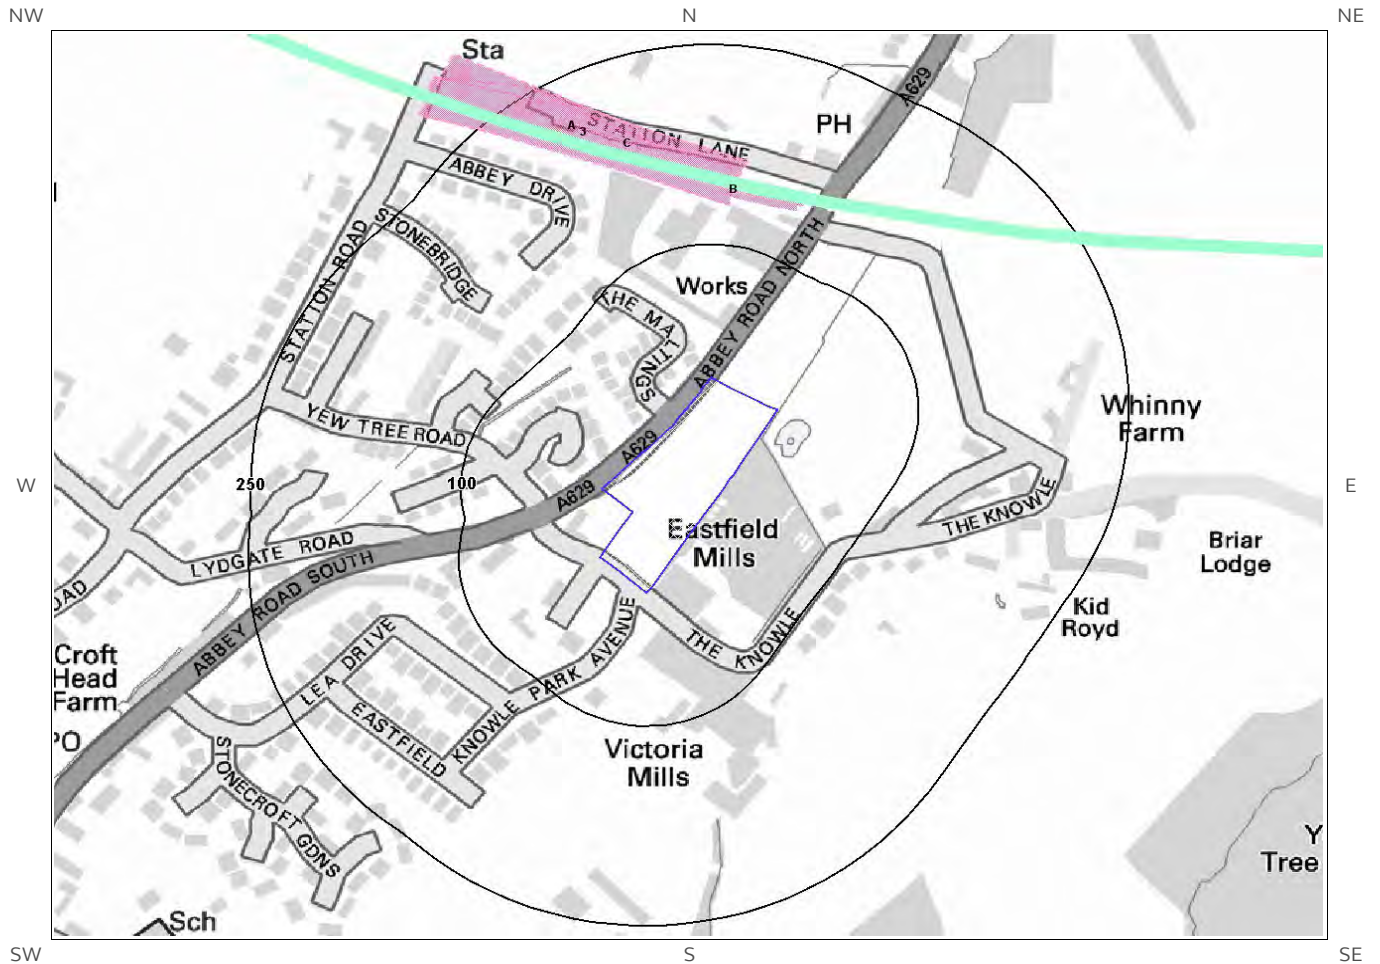

Railways and Tunnels Legend

© Crown copyright and database rights 2019.
Ordnance Survey licence 100035207.
© OpenStreetMapContributors

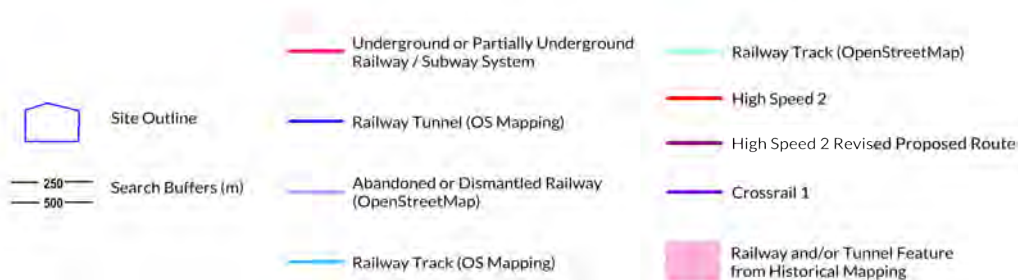

9 Railways and Tunnels

9.1 Tunnels

This data is derived from OpenStreetMap and provides information on the possible locations of underground railway systems in the UK - the London Underground, the Tyne & Wear Metro and the Glasgow Subway.

Have any underground railway lines been identified within the study site boundary? No

Have any underground railway lines been identified within 250m of the study site boundary? No

Database searched and no data found.

Any records that have been identified are represented on the Railways and Tunnels map.

This data is derived from Ordnance Survey mapping and provides information on the possible locations of railway tunnels forming part of the UK overground railway network.

Have any other railway tunnels been identified within the site boundary? No

Have any other railway tunnels been identified within 250m of the site boundary? No

Database searched and no data found.

Any records that have been identified are represented on the Railways and Tunnels map.

9.2 Historical Railway and Tunnel Features

This data is derived from Groundsure's unique Historical Land-use Database and contains features relating to tunnels, railway tracks or associated works that have been identified from historical Ordnance Survey mapping.

Have any historical railway or tunnel features been identified within the study site boundary? No

Have any historical railway or tunnel features been identified within 250m of the study site boundary? Yes

ID	Distance (m)	Direction	NGR	Details	Date
1A	130	N	419746 410258	Railway Sidings	1968
2A	130	N	419746 410258	Railway Sidings	1955
3	132	N	419748 410254	Railway Sidings	1932
6B	135	N	419854 410212	Railway Sidings	1913
7B	140	N	419858 410216	Railway Sidings	1959
4A	143	N	419744 410254	Railway Sidings	1948

ID	Distance (m)	Direction	NGR	Details	Date
5A	143	N	419744 410254	Railway Sidings	1904
8C	153	N	419778 410247	Railway Sidings	1913
9C	157	N	419781 410252	Railway Sidings	1959

Any records that have been identified are represented on the Railways and Tunnels map.

9.3 Historical Railways

This data is derived from OpenStreetMap and provides information on the possible alignments of abandoned or dismantled railway lines in proximity to the study site.

Have any historical railway lines been identified within the study site boundary? No

Have any historical railway lines been identified within 250m of the study site boundary? No

Database searched and no data found.

Multiple sections of the same track may be listed in the detail above

Any records that have been identified are represented on the Railways and Tunnels map.

9.4 Active Railways

These datasets are derived from Ordnance Survey mapping and OpenStreetMap and provide information on the possible locations of active railway lines in proximity to the study site.

Have any active railway lines been identified within the study site boundary? No

Have any active railway lines been identified within 250m of the study site boundary? Yes

Distance (m)	Direction	Name	Type
143	N	Penistone Line	rail
143	N	Not given	Multi Track
143	N	Not given	Multi Track
143	N	Penistone Line	rail
148	N	Penistone Line	rail
148	N	Penistone Line	rail
151	NE	Penistone Line	rail
151	NE	Penistone Line	rail
155	NE	Penistone Line	rail
155	NE	Penistone Line	rail
156	NE	Penistone Line	rail
156	NE	Penistone Line	rail
160	NE	Penistone Line	rail
160	NE	Penistone Line	rail

Multiple sections of the same track may be listed in the detail above

Any records that have been identified are represented on the Railways and Tunnels map.

9.5 Railway Projects

These datasets provide information on the location of large scale railway projects High Speed 2 and Crossrail 1 .

Is the study site within 5km of the route of the High Speed 2 rail project? No

Is the study site within 500m of the route of the Crossrail 1 rail project? No

*Further information on proximity to these routes, the project construction status and associated works can be obtained through the purchase of a **Groundsure HS2 and Crossrail 1 Report**.*

The route data has been digitised from publicly available maps by Groundsure. The route as provided relates to the Crossrail 1 project only, and does not include any details of the Crossrail 2 project, as final details of the route for Crossrail 2 are still under consultation.

Please note that this assessment takes account of both the original Phase 2b proposed route and the amended route proposed in 2016. As the Phase 2b route is still under consultation, Groundsure are providing information on both options until the final route is formally confirmed. Practitioners should take account of this uncertainty when advising clients.

Contact Details

Groundsure Helpline
Telephone: 08444 159 000
info@groundsure.com



British Geological Survey Enquiries

Kingsley Dunham Centre
Keyworth, Nottingham NG12 5GG
Tel: 0115 936 3143.
Fax: 0115 936 3276.
Email: enquiries@bgs.ac.uk
Web: www.bgs.ac.uk



BGS Geological Hazards Reports and general geological enquiries

British Gypsum

British Gypsum Ltd
East Leake
Loughborough
Leicestershire
LE12 6HX



The Coal Authority

200 Lichfield Lane
Mansfield
Notts NG18 4RG
Tel: 0345 7626 848
DX 716176 Mansfield 5
www.coal.gov.uk



Public Health England

Public information access office
Public Health England, Wellington House
133-155 Waterloo Road, London, SE1 8UG
<https://www.gov.uk/government/organisations/public-health-england>
Email: enquiries@phe.gov.uk
Main switchboard: 020 7654 8000



Johnson Poole & Bloomer Limited

Harris and Pearson Building, Brettell Lane
Brierley Hill, West Midlands
DY5 3LH
Tel: +44 (0) 1384 262 000
Email: enquiries.gs@jpb.co.uk
Website: www.jpb.co.uk



Ordnance Survey

Adanac Drive, Southampton
SO16 0AS
Tel: 08456 050505
Website: <http://www.ordnancesurvey.co.uk/>



Getmapping PLC

Virginia Villas, High Street, Hartley Witney,
Hampshire RG27 8NW
Tel: 01252 845444
Website: <http://www.1.getmapping.com/>



Peter Brett Associates
Caversham Bridge House
Waterman Place
Reading
Berkshire RG1 8DN
Tel: +44 (0)118 950 0761 E-mail: reading@pba.co.uk
Website: <http://www.peterbrett.com/home>



Acknowledgements: Ordnance Survey © Crown Copyright and/or Database Right. All Rights Reserved. Licence Number [03421028].
This report has been prepared in accordance with the Groundsure Ltd standard Terms and Conditions of business for work of this nature.

Standard Terms and Conditions

Groundsure's Terms and Conditions can be viewed online at this link:
<https://www.groundsure.com/terms-and-conditions-feb11-2019>



The Coal
Authority

CON29M

coal mining report

ABBAY ROAD, SHEPLEY, HUDDERSFIELD, KIRKLEES, HD8 8BX



Known or potential coal mining risks

Past underground coal mining	Page 4
Future underground coal mining	Page 4
Mine entries	Page 5



Further action

No further reports from the Coal Authority are required. Further information on any next steps can be found in our Professional opinion.

For more information on our reports please visit
www.groundstability.com



Professional opinion

According to the official mining information records held by the Coal Authority at the time of this search, evidence of, or the potential for, coal mining related features have been identified. In view of the coal mining circumstances we would recommend that any planned or future development should follow detailed technical advice before beginning work on site. Please see **page 3** for further details on **Future development**.

Your reference: **YCP 7465**
Our reference: **51002302627001**
Date: **30 September 2020**

Client name:
**HAIGH HUDDLESTON &
ASSOCIATES**

If you require any further assistance please
contact our experts on:
0345 762 6848
groundstability@coal.gov.uk



The Law
Society


Enquiry boundary

Key

Approximate position of enquiry boundary shown



We can confirm that the location is
on the coalfield

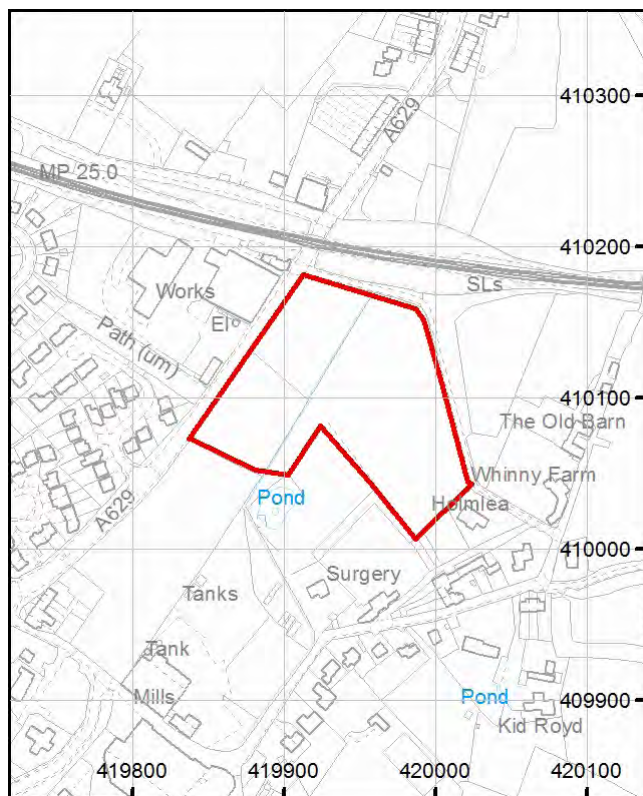

Reproduced by permission of Ordnance Survey on behalf of HMSO. © Crown copyright and database right 2018. All rights reserved.
Ordnance Survey Licence number: 100020315.

This report is prepared in accordance with the latest Law Society's Guidance Notes 2018, the User Guide 2018 and the Coal Authority's Terms and Conditions applicable at the time the report was produced.



Accessibility

If you would like this information in an alternative format, please contact our communications team on 0345 762 6848 or email communications@coal.gov.uk.

Professional opinion



Future development

If development proposals are being considered, technical advice relating to both the investigation of coal and former coal mines and their treatment should be obtained before beginning work on site. All proposals should apply specialist engineering practice required for former mining areas. No development should be undertaken that intersects, disturbs or interferes with any coal or coal mines without first obtaining the permission of the Coal Authority. Developers should be aware that the investigation of coal seams, mine workings or mine entries may have the potential to generate and/or displace underground gases. Associated risks both to the development site and any neighbouring land or properties should be fully considered when undertaking any ground works. The need for effective measures to prevent gases migrating onto any land or into any properties, either during investigation or remediation work, or after development must also be assessed and properly addressed.

If you are looking to develop, or undertake works, within a coal mining development high risk area your Local Authority planning department may require a Coal Mining Risk Assessment to be undertaken by a qualified mining geologist or engineer. Should you require any additional information then please contact the Coal Authority on **0345 762 6848** or email **cmra@coal.gov.uk**.

Detailed findings

Information provided by the Coal Authority in this report is compiled in response to the Law Society's CON29M Coal Mining enquiries. The said enquiries are protected by copyright owned by the Law Society of 113 Chancery Lane, London WC2A 1PL.

The Coal Authority owns the copyright in this report and the information used to produce this report is protected by our database rights. All rights are reserved and unauthorised use is prohibited. If we provide a report for you, this does not mean that copyright and any other rights will pass to you. However, you can use the report for your own purposes.

1 Past underground coal mining

The property is not within a surface area that could be affected by any past recorded underground coal mining.

However the property is in an area where the Coal Authority believes there is coal at or close to the surface. This coal may have been worked at some time in the past. The potential presence of coal workings at or close to the surface should be considered, particularly prior to any site works or future development activity, as ground movement could still be a risk. Your attention is drawn to the Professional opinion sections of the report.

2 Present underground coal mining

The property is not within a surface area that could be affected by present underground mining.

3 Future underground coal mining

The property is not in an area where the Coal Authority has received an application for, and is currently considering whether to grant a licence to remove or work coal by underground methods.

The property is not in an area where a licence has been granted to remove or otherwise work coal using underground methods.

The property is not in an area likely to be affected from any planned future underground coal mining.

However, reserves of coal exist in the local area which could be worked at some time in the future.

No notices have been given, under section 46 of the Coal Mining Subsidence Act 1991, stating that the land is at risk of subsidence.

4 Mine entries

There are no recorded coal mine entries known to the Coal Authority within, or within 20 metres, of the boundary of the property.

This information is based on the information that the Coal Authority has at the time of this enquiry.

Based on the Coal Authority's knowledge of the mining circumstances at the time of this enquiry, there may be unrecorded mine entries in the local area that do not appear on Coal Authority records.

5 Coal mining geology

The Coal Authority is not aware of any damage due to geological faults or other lines of weakness that have been affected by coal mining.

6 Past opencast coal mining

The property is not within the boundary of an opencast site from which coal has been removed by opencast methods.

7 Present opencast coal mining

The property does not lie within 200 metres of the boundary of an opencast site from which coal is being removed by opencast methods.

8 Future opencast coal mining

There are no licence requests outstanding to remove coal by opencast methods within 800 metres of the boundary.

The property is not within 800 metres of the boundary of an opencast site for which a licence to remove coal by opencast methods has been granted.

9 Coal mining subsidence

The Coal Authority has not received a damage notice or claim for the subject property, or any property within 50 metres of the enquiry boundary, since 31 October 1994.

There is no current Stop Notice delaying the start of remedial works or repairs to the property.

The Coal Authority is not aware of any request having been made to carry out preventive works before coal is worked under section 33 of the Coal Mining Subsidence Act 1991.

10 Mine gas

The Coal Authority has no record of a mine gas emission requiring action.

11 Hazards related to coal mining

The property has not been subject to remedial works, by or on behalf of the Coal Authority, under its Emergency Surface Hazard Call Out procedures.

12 Withdrawal of support

The property is not in an area where a notice to withdraw support has been given.

The property is not in an area where a notice has been given under section 41 of the Coal Industry Act 1994, cancelling the entitlement to withdraw support.

13 Working facilities order

The property is not in an area where an order has been made, under the provisions of the Mines (Working Facilities and Support) Acts 1923 and 1966 or any statutory modification or amendment thereof.

14 Payments to owners of former copyhold land

The property is not in an area where a relevant notice has been published under the Coal Industry Act 1975/Coal Industry Act 1994.

Statutory cover



Coal mining subsidence

In the unlikely event of any coal mining related subsidence damage, the Coal Authority or the mine operator has a duty to take remedial action in respect of subsidence caused by the withdrawal of support from land or property in connection with lawful coal mining operations.

When the works are the responsibility of the Coal Authority, our dedicated public safety and subsidence team will manage the claim. The house or land owner ("the owner") is covered for these works under the terms of the Coal Mining Subsidence Act 1991 (as amended by the Coal Industry Act 1994). Please note, this Act does not apply where coal was worked or gotten by virtue of the grant of a gale in the Forest of Dean, or any other part of the Hundred of St. Briavels in the county of Gloucester.

If you believe your land or property is suffering from coal mining subsidence damage and you need more information on what to do next, please use the following link to our website which sets out what your rights are and what you need to consider before making a claim.

www.gov.uk/government/publications/coal-mining-subsidence-damage-notice-form



Coal mining hazards

Our public safety and subsidence team provide a 24 hour a day, 7 days a week hazard reporting service, to help protect the public from hazards caused by past coal workings, such as a mine shaft or shallow working collapse. To report any hazards please call **01623 646 333**. Further information can be found on our website: www.gov.uk/coalauthority.

Glossary



Key terms

adit - horizontal or sloped entrance to a mine

coal mining subsidence - ground movement caused by the removal of coal by underground mining

Coal Mining Subsidence Act 1991 - the Act setting out the duties of the Coal Authority to repair damage caused by coal mining subsidence

coal mining subsidence damage - damage to land, buildings or structures caused by the removal of coal by underground mining

coal seams - bed of coal of varying thickness

future opencast coal mining - a licence granted, or licence application received, by the Coal Authority to excavate coal from the surface

future underground coal mining - a licence granted, or licence application received, by the Coal Authority to excavate coal underground. Although it is unlikely, remaining coal reserves could create a possibility for future mining, which would be licensed by the Coal Authority

mine entries - collective name for shafts and adits

payments to owners of former copyhold land - historically, copyhold land gave rights to coal to the copyholder. Legislation was set up to allow others to work this coal, but they had to issue a notice and pay compensation if a copyholder came forward

shaft - vertical entry into a mine

site investigation - investigations of coal mining risks carried out with the Coal Authority's permission

stop notice - a delay to repairs because further coal mining subsidence damage may occur and it would be unwise to carry out permanent repairs

subsidence claim - a formal notice of subsidence damage to the Coal Authority since it was established on 31 October 1994

withdrawal of support - a historic notice informing landowners that the coal beneath their property was going to be worked

working facilities orders - a court order which gave permission, restricted or prevented coal mine workings

APPENDIX C

GROUNDSURE REPORT

HISTORICAL MAPS



Haigh Huddleston & Associates
99-101, LEEDS ROAD,
DEWSBURY, WF12 7BU

Groundsure Reference:	GS-6047536
Your Reference:	YORKSHIRE_COUNTRY_PROPERTIES_7465
Report Date	22 May 2019
Report Delivery Method:	Email - pdf

Enviro Insight

Address: 419815, 410001,

Dear Sir/ Madam,

Thank you for placing your order with Groundsure. Please find enclosed the **Groundsure Enviro Insight** as requested.

If you need any further assistance, please do not hesitate to contact our helpline on 08444 159000 quoting the above Groundsure reference number.

Yours faithfully,

Redacted

Managing Director
Groundsure Limited

Enc.
Groundsure Enviroinsight

Address: 419815, 410001,
 Date: 22 May 2019
 Reference: GS-6047536
 Client: Haigh Huddleston & Associates

NW

N

NE

W

E



SW

S

SE

Aerial Photograph Capture date: 29-Jun-2018
 Grid Reference: 419815,410001
 Site Size: 0.8858ha

Report Reference: GS-6047536
 Client Reference: YORKSHIRE_COUNTRY_PROPERTIES_7465

Contents Page

Contents Page	3
Overview of Findings	6
Using this report	10
1. Historical Land Use	11
1. Historical Industrial Sites	12
1.1 Potentially Contaminative Uses identified from 1:10,000 scale Mapping	12
1.2 Additional Information – Historical Tank Database	14
1.3 Additional Information – Historical Energy Features Database	15
1.4 Additional Information – Historical Petrol and Fuel Site Database	15
1.5 Additional Information – Historical Garage and Motor Vehicle Repair Database	15
1.6 Historical military sites	16
1.7 Potentially Infilled Land	16
2. Environmental Permits, Incidents and Registers Map	18
2. Environmental Permits, Incidents and Registers	19
2.1 Industrial Sites Holding Licences and/or Authorisations	19
2.1.1 Records of historic IPC Authorisations within 500m of the study site	19
2.1.2 Records of Part A(1) and IPPC Authorised Activities within 500m of the study site	19
2.1.3 Records of Red List Discharge Consents (potentially harmful discharges to controlled waters) within 500m of the study site	19
2.1.4 Records of List 1 Dangerous Substances Inventory Sites within 500m of the study site	19
2.1.5 Records of List 2 Dangerous Substance Inventory Sites within 500m of the study site	19
2.1.6 Records of Part A(2) and Part B Activities and Enforcements within 500m of the study site	20
2.1.7 Records of Category 3 or 4 Radioactive Substances Authorisations	20
2.1.8 Records of Licensed Discharge Consents within 500m of the study site	20
2.1.9 Records of Water Industry Referrals (potentially harmful discharges to the public sewer) within 500m of the study site	20
2.1.10 Records of Planning Hazardous Substance Consents and Enforcements within 500m of the study site	21
2.2 Dangerous or Hazardous Sites	21
2.3 Environment Agency/Natural Resources Wales Recorded Pollution Incidents	21
2.3.1 Records of National Incidents Recording System, List 2 within 500m of the study site	21
2.3.2 Records of National Incidents Recording System, List 1 within 500m of the study site	21
2.4 Sites Determined as Contaminated Land under Part 2A EPA 1990	22
3. Landfill and Other Waste Sites Map	23
3. Landfill and Other Waste Sites	24
3.1 Landfill Sites	24
3.1.1 Records from Environment Agency/Natural Resources Wales landfill data within 1000m of the study site	24
3.1.2 Records of Environment Agency/Natural Resources Wales historic landfill sites within 1500m of the study site	24
3.1.3 Records of BGS/DoE non-operational landfill sites within 1500m of the study site	25
3.1.4 Records of Landfills from Local Authority and Historical Mapping Records within 1500m of the study site	25
3.2 Other Waste Sites	25
3.2.1 Records of waste treatment, transfer or disposal sites within 500m of the study site	25
3.2.2 Records of Environment Agency/Natural Resources Wales licensed waste sites within 1500m of the study site	25
4. Current Land Use Map	27
4. Current Land Uses	28
4.1 Current Industrial Data	28
4.2 Petrol and Fuel Sites	28
4.3 National Grid High Voltage Underground Electricity Transmission Cables	29
4.4 National Grid High Pressure Gas Transmission Pipelines	29

5. Geology	30
5.1 Artificial Ground and Made Ground.....	30
5.2 Superficial Ground and Drift Geology	30
5.3 Bedrock and Solid Geology	30
6 Hydrogeology and Hydrology	31
6a. Aquifer Within Superficial Geology	31
6b. Aquifer Within Bedrock Geology and Abstraction Licences	32
6c. Hydrogeology – Source Protection Zones and Potable Water Abstraction Licences	33
6d. Hydrogeology – Source Protection Zones within confined aquifer	34
6e. Hydrology – Watercourse Network and River Quality	35
6.Hydrogeology and Hydrology	36
6.1 Aquifer within Superficial Deposits.....	36
6.2 Aquifer within Bedrock Deposits.....	36
6.3 Groundwater Abstraction Licences.....	37
6.4 Surface Water Abstraction Licences.....	39
6.5 Potable Water Abstraction Licences.....	39
6.6 Source Protection Zones.....	41
6.7 Source Protection Zones within Confined Aquifer.....	41
6.8 Groundwater Vulnerability and Soil Leaching Potential.....	42
6.9 River Quality.....	42
6.9.1 Biological Quality:.....	43
6.9.2 Chemical Quality:.....	43
6.10 Ordnance Survey MasterMap Water Network.....	43
6.11 Surface Water Features.....	50
7a. Environment Agency/Natural Resources Wales Flood Map for Planning (from rivers and the sea)	51
7b. Environment Agency/Natural Resources Wales Risk of Flooding from Rivers and the Sea (RoFRaS)	52
Map	52
7 Flooding	53
7.1 River and Coastal Zone 2 Flooding.....	53
7.2 River and Coastal Zone 3 Flooding.....	53
7.3 Risk of Flooding from Rivers and the Sea (RoFRaS) Flood Rating.....	53
7.4 Flood Defences.....	53
7.5 Areas benefiting from Flood Defences.....	53
7.6 Areas benefiting from Flood Storage.....	54
7.7 Groundwater Flooding Susceptibility Areas.....	54
7.8 Groundwater Flooding Confidence Areas.....	54
8. Designated Environmentally Sensitive Sites Map	55
8. Designated Environmentally Sensitive Sites	56
8.1 Records of Sites of Special Scientific Interest (SSSI) within 2000m of the study site:.....	56
8.2 Records of National Nature Reserves (NNR) within 2000m of the study site:.....	56
8.3 Records of Special Areas of Conservation (SAC) within 2000m of the study site:.....	56
8.4 Records of Special Protection Areas (SPA) within 2000m of the study site:.....	56
8.5 Records of Ramsar sites within 2000m of the study site:.....	56
8.6 Records of Ancient Woodland within 2000m of the study site:	57
8.7 Records of Local Nature Reserves (LNR) within 2000m of the study site:.....	57
8.8 Records of World Heritage Sites within 2000m of the study site:.....	58
8.9 Records of Environmentally Sensitive Areas within 2000m of the study site:	58
8.10 Records of Areas of Outstanding Natural Beauty (AONB) within 2000m of the study site:	58
8.11 Records of National Parks (NP) within 2000m of the study site:	58
8.12 Records of Nitrate Sensitive Areas within 2000m of the study site:.....	58
8.13 Records of Nitrate Vulnerable Zones within 2000m of the study site:.....	58

8.14 Records of Green Belt land within 2000m of the study site:.....	59
9. Natural Hazards Findings.....	60
9.1 Detailed BGS GeoSure Data.....	60
9.1.1 Shrink Swell.....	60
9.1.2 Landslides.....	60
9.1.3 Soluble Rocks.....	60
9.1.4 Compressible Ground.....	61
9.1.5 Collapsible Rocks.....	61
9.1.6 Running Sand.....	61
9.2 Radon.....	62
9.2.1 Radon Affected Areas.....	62
9.2.2 Radon Protection.....	62
10. Mining.....	63
10.1 Coal Mining.....	63
10.2 Non-Coal Mining.....	63
10.3 Brine Affected Areas	63
Contact Details.....	64
Standard Terms and Conditions.....	66

Overview of Findings

For further details on each dataset, please refer to each individual section in the main report as listed. Where the database has been searched a numerical result will be recorded. Where the database has not been searched '-' will be recorded.

Section 1: Historical Industrial Sites	On-site	0-50	51-250	251-500
1.1 Potentially Contaminative Uses identified from 1:10,000 scale mapping	1	18	38	43
1.2 Additional Information – Historical Tank Database	1	11	1	1
1.3 Additional Information – Historical Energy Features Database	0	2	6	12
1.4 Additional Information – Historical Petrol and Fuel Site Database	0	0	0	0
1.5 Additional Information – Historical Garage and Motor Vehicle Repair Database	0	0	0	5
1.6 Historical military sites	0	0	0	0
1.7 Potentially Infilled Land	0	1	16	27
Section 2: Environmental Permits, Incidents and Registers	On-site	0-50m	51-250	251-500
2.1 Industrial Sites Holding Environmental Permits and/or Authorisations				
2.1.1 Records of historic IPC Authorisations	0	0	0	0
2.1.2 Records of Part A(1) and IPPC Authorised Activities	0	0	0	0
2.1.3 Records of Red List Discharge Consents	0	0	0	0
2.1.4 Records of List 1 Dangerous Substances Inventory sites	0	0	0	0
2.1.5 Records of List 2 Dangerous Substances Inventory sites	0	0	0	0
2.1.6 Records of Part A(2) and Part B Activities and Enforcements	0	0	0	1
2.1.7 Records of Category 3 or 4 Radioactive Substances Authorisations	0	0	0	0
2.1.8 Records of Licensed Discharge Consents	1	0	0	0
2.1.9 Records of Water Industry Referrals	0	0	0	0
2.1.10 Records of Planning Hazardous Substance Consents and Enforcements within 500m of the study site	0	0	0	0
2.2 Records of COMAH and NIHHS sites	0	0	0	0
2.3 Environment Agency/Natural Resources Wales Recorded Pollution Incidents				
2.3.1 National Incidents Recording System, List 2	0	0	1	1
2.3.2 National Incidents Recording System, List 1	0	0	0	0
2.4 Sites Determined as Contaminated Land under Part 2A EPA 1990	0	0	0	0

Section 3: Landfill and Other Waste Sites	On-site	0-50m	51-250	251-500	501-1000	1000-1500
3.1 Landfill Sites						
3.1.1 Environment Agency/Natural Resources Wales Registered Landfill Sites	0	0	0	0	0	Not searched
3.1.2 Environment Agency/Natural Resources Wales Historic Landfill Sites	0	0	1	0	0	3
3.1.3 BGS/DoE Landfill Site Survey	0	0	0	0	0	0
3.1.4 Records of Landfills in Local Authority and Historical Mapping Records	0	0	0	0	0	0
3.2 Landfill and Other Waste Sites Findings						
3.2.1 Operational and Non-Operational Waste Treatment, Transfer and Disposal Sites	0	0	0	0	Not searched	Not searched
3.2.2 Environment Agency/Natural Resources Wales Licensed Waste Sites	0	0	0	0	0	2

Section 4: Current Land Use	On-site	0-50m	51-250	251-500
4.1 Current Industrial Sites Data	0	5	5	Not searched
4.2 Records of Petrol and Fuel Sites	0	0	0	0
4.3 National Grid Underground Electricity Cables	0	0	0	0
4.4 National Grid Gas Transmission Pipelines	0	0	0	0

Section 5: Geology	
5.1 Records of Artificial Ground and Made Ground present beneath the study site	None identified
5.2 Records of Superficial Ground and Drift Geology present beneath the study site	None identified
5.3 For records of Bedrock and Solid Geology beneath the study site see the detailed findings section.	

Section 6: Hydrogeology and Hydrology				0-500m		
6.1 Records of Strata Classification in the Superficial Geology within 500m of the study site				None identified		
6.2 Records of Strata Classification in the Bedrock Geology within 500m of the study site				Identified		
	On-site	0-50m	51-250	251-500	501-1000	1000-2000
6.3 Groundwater Abstraction Licences (within 2000m of the study site)	0	0	6	0	2	5
6.4 Surface Water Abstraction Licences (within 2000m of the study site)	0	0	0	0	0	4
6.5 Potable Water Abstraction Licences (within 2000m of the study site)	0	0	6	0	2	0
6.6 Source Protection Zones (within 500m of the study site)	2	0	0	1	Not searched	Not searched
6.7 Source Protection Zones within Confined Aquifer	0	0	0	0	Not searched	Not searched
6.8 Groundwater Vulnerability and Soil Leaching Potential (within 500m of the study site)	1	0	3	1	Not searched	Not searched

Section 6: Hydrogeology and Hydrology

0-500m

	On-site	0-50m	51-250	251-500	501-1000	1000-1500
6.9 Environment Agency/Natural Resources Wales information on river quality within 1500m of the study site	No	No	No	No	No	Yes
6.10 Ordnance Survey MasterMap Water Network entries within 500m of the site	0	0	24	50	Not searched	Not searched
6.11 Surface water features within 250m of the study site	No	Yes	Yes	Not searched	Not searched	Not searched

Section 7: Flooding

7.1 Environment Agency Zone 2 floodplains within 250m of the study site	None identified					
7.2 Environment Agency/Natural Resources Wales Zone 3 floodplains within 250m of the study site	None identified					
7.3 Risk of flooding from Rivers and the Sea (RoFRaS) rating for the study site	Very Low					
7.4 Flood Defences within 250m of the study site	None identified					
7.5 Areas benefiting from Flood Defences within 250m of the study site	None identified					
7.6 Areas used for Flood Storage within 250m of the study site	None identified					
7.7 Maximum BGS Groundwater Flooding susceptibility within 50m of the study site	Limited potential					
7.8 BGS confidence rating for the Groundwater Flooding susceptibility areas	Low					

Section 8: Designated Environmentally Sensitive Sites

	On-site	0-50m	51-250	251-500	501-1000	1000-2000
8.1 Records of Sites of Special Scientific Interest (SSSI)	0	0	0	0	0	0
8.2 Records of National Nature Reserves (NNR)	0	0	0	0	0	0
8.3 Records of Special Areas of Conservation (SAC)	0	0	0	0	0	0
8.4 Records of Special Protection Areas (SPA)	0	0	0	0	0	0
8.5 Records of Ramsar sites	0	0	0	0	0	0
8.6 Records of Ancient Woodlands	0	0	0	1	3	13
8.7 Records of Local Nature Reserves (LNR)	0	0	0	0	0	0
8.8 Records of World Heritage Sites	0	0	0	0	0	0
8.9 Records of Environmentally Sensitive Areas	0	0	0	0	0	0

Section 8: Designated Environmentally Sensitive Sites	On-site	0-50m	51-250	251-500	501-1000	1000-2000
8.10 Records of Areas of Outstanding Natural Beauty (AONB)	0	0	0	0	0	0
8.11 Records of National Parks	0	0	0	0	0	0
8.12 Records of Nitrate Sensitive Areas	0	0	0	0	0	0
8.13 Records of Nitrate Vulnerable Zones	0	0	0	0	0	3
8.14 Records of Green Belt land	2	0	2	0	1	0

Section 9: Natural Hazards	
9.1 Maximum risk of natural ground subsidence	Very Low
9.1.1 Maximum Shrink-Swell hazard rating identified on the study site	Very Low
9.1.2 Maximum Landslides hazard rating identified on the study site	Very Low
9.1.3 Maximum Soluble Rocks hazard rating identified on the study site	Negligible
9.1.4 Maximum Compressible Ground hazard rating identified on the study site	Negligible
9.1.5 Maximum Collapsible Rocks hazard rating identified on the study site	Very Low
9.1.6 Maximum Running Sand hazard rating identified on the study site	Negligible
9.2 Radon	
9.2.1 Is the property in a Radon Affected Area as defined by the Health Protection Agency (HPA) and if so what percentage of homes are above the Action Level?	The site is not in a Radon Affected Area, as less than 1% of properties are above the Action Level.
9.2.2 Is the property in an area where Radon Protection are required for new properties or extensions to existing ones as described in publication BR211 by the Building Research Establishment?	No radon protective measures are necessary.

Section 10: Mining	
10.1 Coal mining areas within 75m of the study site	Identified
10.2 Non-Coal Mining areas within 50m of the study site boundary	None identified
10.3 Brine affected areas within 75m of the study site	None identified

Using this report

The following report is designed by Environmental Consultants for Environmental Professionals bringing together the most up-to-date market leading environmental data. This report is provided under and subject to the Terms & Conditions agreed between Groundsure and the Client. The document contains the following sections:

1. Historical Industrial Sites

Provides information on past land uses that may pose a risk to the study site in terms of potential contamination from activities or processes. Potentially Infilled Land features are also included. This search is conducted using radii of up to 500m.

2. Environmental Permits, Incidents and Registers

Provides information on Regulated Industrial Activities and Pollution Incidents as recorded by Regulatory Authorities, and sites determined as Contaminated Land. This search is conducted using radii up to 500m.

3. Landfills and Other Waste Sites

Provides information on landfills and other waste sites that may pose a risk to the study site. This search is conducted using radii up to 1500m.

4. Current Land Uses

Provides information on current land uses that may pose a risk to the study site in terms of potential contamination from activities or processes. These searches are conducted using radii of up to 500m. This includes information on potentially contaminative industrial sites, petrol stations and fuel sites as well as high pressure gas pipelines and underground electricity transmission lines.

5. Geology

Provides information on artificial and superficial deposits and bedrock beneath the study site.

6. Hydrogeology and Hydrology

Provides information on productive strata within the bedrock and superficial geological layers, abstraction licences, Source Protection Zones (SPZs) and river quality. These searches are conducted using radii of up to 2000m.

7. Flooding

Provides information on river and coastal flooding, flood defences, flood storage areas and groundwater flood areas. This search is conducted using radii of up to 250m.

8. Designated Environmentally Sensitive Sites

Provides information on the Sites of Special Scientific Interest (SSSI), National Nature Reserves (NNR), Special Areas of Conservation (SAC), Special Protection Areas (SPA), Ramsar sites, Local Nature Reserves (LNR), Areas of Outstanding Natural Beauty (AONB), National Parks (NP), Environmentally Sensitive Areas, Nitrate Sensitive Areas, Nitrate Vulnerable Zones and World Heritage Sites and Scheduled Ancient Woodland. These searches are conducted using radii of up to 2000m.

9. Natural Hazards

Provides information on a range of natural hazards that may pose a risk to the study site. These factors include natural ground subsidence and radon..

10. Mining

Provides information on areas of coal and non-coal mining and brine affected areas.

11. Contacts

This section of the report provides contact points for statutory bodies and data providers that may be able to provide further information on issues raised within this report. Alternatively, Groundsure provide a free Technical Helpline (08444 159000) for further information and guidance.


Note: Maps

Only certain features are placed on the maps within the report. All features represented on maps found within this search are given an identification number. This number identifies the feature on the mapping and correlates it to the additional information provided below. This identification number precedes all other information and takes the following format -Id: 1, Id: 2, etc. Where numerous features on the same map are in such close proximity that the numbers would obscure each other a letter identifier is used instead to represent the features. (e.g. Three features which overlap may be given the identifier "A" on the map and would be identified separately as features 1A, 3A, 10A on the data tables provided).


Where a feature is reported in the data tables to a distance greater than the map area, it is noted in the data table as "Not Shown".

All distances given in this report are in Metres (m). Directions are given as compass headings such as N: North, E: East, NE: North East from the nearest point of the study site boundary.

1. Historical Land Use

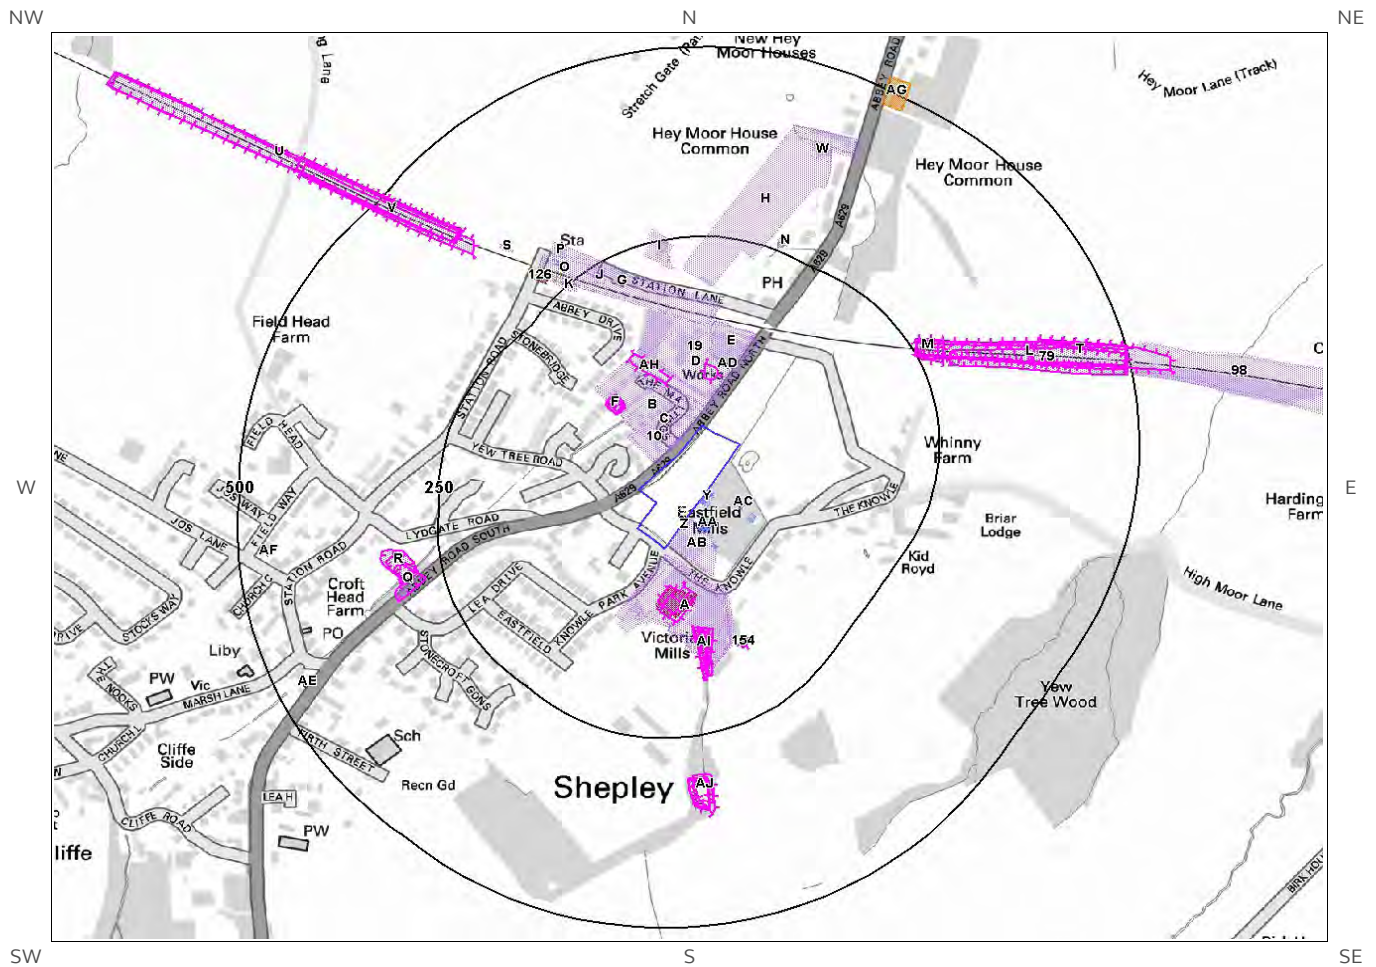

© Crown copyright and database rights 2019.
Ordnance Survey licence 100035207.

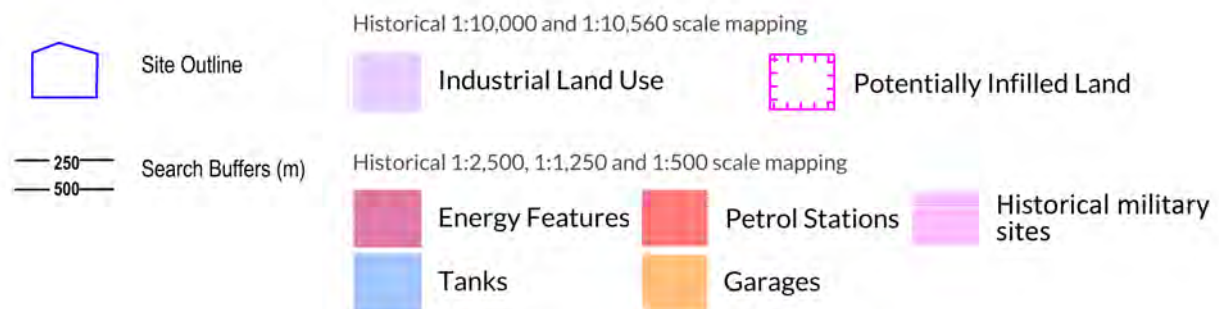

1. Historical Industrial Sites

1.1 Potentially Contaminative Uses identified from 1:10,000 scale Mapping

The systematic analysis of data extracted from standard 1:10,560 and 1:10,000 scale historical maps provides the following information:

Records of sites with a potentially contaminative past land use within 500m of the search boundary: 100

ID	Distance [m]	Direction	Use	Date
1AB	0	On Site	Unspecified Mills	1980
2Y	1	SE	Unspecified Tanks	1980
3C	8	NW	Sawmill	1951
4A	8	S	Unspecified Mills	1970
5A	8	S	Unspecified Mills	1980
6A	10	SE	Unspecified Mills	1955
7B	10	NW	Unspecified Commercial/Industrial	1968
8B	10	NW	Unspecified Commercial/Industrial	1977
9B	10	NW	Unspecified Commercial/Industrial	1990
10	12	NW	Sawmill	1948
11A	13	S	Unspecified Mills	1904
12A	13	S	Unspecified Mills	1948
13B	14	NW	Sawmill	1932
14C	14	NW	Sawmill	1904
15A	14	S	Unspecified Mills	1932
16D	17	NE	Gas Works	1892
17A	22	S	Unspecified Mill	1892
18D	26	N	Gas Works	1904
19	35	N	Unspecified Works	1990
20D	62	N	Unspecified Pit	1968
21AH	72	NW	Refuse Heap	1904
22E	86	NE	Unspecified Works	1977
23E	86	NE	Malthouse	1968
24E	86	NE	Malthouse	1951
25E	87	NE	Malthouse	1948
26E	87	NE	Malthouse	1904
27E	87	NE	Malthouse	1932
28F	90	NW	Unspecified Heap	1948
29F	90	NW	Unspecified Heap	1951
30F	94	NW	Unspecified Heap	1932
31F	94	NW	Unspecified Heap	1932
32G	130	N	Railway Sidings	1968

33G	130	N	Railway Sidings	1951
34G	132	N	Railway Sidings	1932
35G	143	N	Railway Sidings	1904
36G	143	N	Railway Sidings	1948
37H	184	N	Unspecified Works	1977
38H	184	N	Unspecified Works	1968
39H	184	N	Unspecified Disused Mill	1951
40I	210	N	Sawmill	1904
41I	220	N	Sawmill	1892
42J	223	NW	Railway Building	1892
43J	232	NW	Railway Building	1977
44J	232	NW	Railway Building	1968
45J	232	NW	Railway Building	1990
46J	232	NW	Goods Shed	1951
47J	233	NW	Goods Shed	1932
48J	236	NW	Railway Building	1904
49J	236	NW	Goods Shed	1948
50K	236	NW	Railway Station	1892
51K	240	NW	Railway Station	1951
52K	241	NW	Railway Station	1932
53K	244	NW	Railway Station	1904
54K	244	NW	Railway Station	1948
55K	247	NW	Railway Station	1968
56L	248	NE	Cuttings	1948
57M	250	NE	Cuttings	1951
58L	251	NE	Cuttings	1904
59L	251	NE	Cuttings	1932
60N	257	NE	Unspecified Tanks	1951
61M	257	NE	Cuttings	1892
62N	257	N	Unspecified Tanks	1932
63N	257	N	Unspecified Tanks	1948
64N	257	N	Unspecified Tanks	1904
65O	260	NW	Railway Building	1892
66O	269	NW	Railway Building	1968
67O	269	NW	Railway Building	1951
68O	270	NW	Railway Building	1932
69P	274	NW	Railway Station	1977
70P	274	NW	Railway Station	1990
71Q	274	W	Refuse Heap	1892
72O	274	NW	Railway Building	1948
73O	274	NW	Railway Building	1904
74L	278	NE	Cuttings	1951
75Q	280	W	Refuse Heap	1948
76Q	280	W	Refuse Heap	1904
77R	282	W	Unspecified Heap	1970
78R	282	W	Unspecified Heap	1980

79	282	E	Cuttings	1892
80S	329	NW	Railway Building	1932
81S	332	NW	Railway Building	1948
82S	332	NW	Railway Building	1904
83V	365	NW	Cuttings	1892
84T	379	E	Cuttings	1993
85T	379	E	Cuttings	1979
86W	381	N	Unspecified Works	1990
87U	391	NW	Cuttings	1904
88U	391	NW	Cuttings	1948
89V	391	NW	Cuttings	1968
90V	391	NW	Cuttings	1977
91V	391	NW	Cuttings	1990
92V	391	NW	Cuttings	1951
93U	392	NW	Cuttings	1932
94W	396	N	Unspecified Mill	1892
95W	399	N	Unspecified Disused Mill	1948
96W	399	N	Unspecified Mill	1904
97W	399	N	Unspecified Disused Mill	1932
98	497	E	Railway Sidings	1932
99X	499	E	Railway Sidings	1979
100X	499	E	Railway Sidings	1967

1.2 Additional Information – Historical Tank Database

The systematic analysis of data extracted from High Detailed 1:1,250 and 1:2,500 scale historical maps provides the following information.

Records of historical tanks within 500m of the search boundary:

14

ID	Distance (m)	Direction	Use	Date
101Y	0	On Site	Tanks	1984
102Y	1	SE	Tanks	1968
103Z	2	SE	Unspecified Tank	1984
104Y	2	SE	Tanks	1992
105Y	2	SE	Tanks	1992
106Z	3	SE	Unspecified Tank	1913
107Z	20	SE	Tanks	1968
108AA	20	SE	Tanks	1913
109AA	20	SE	Tanks	1968
110AC	46	SE	Tanks	1913
111AB	46	SE	Unspecified Tank	1913
112AB	46	SE	Unspecified Tank	
113AC	61	SE	Tanks	

114N	253	N	Tanks
------	-----	---	-------

1.3 Additional Information – Historical Energy Features Database

The systematic analysis of data extracted from High Detailed 1:1,250 and 1:2,500 scale historical maps provides the following information.

Records of historical energy features within 500m of the search boundary:

20

ID	Distance (m)	Direction	Use	Date
115A	50	S	Electricity Substation	1992
116A	50	S	Electricity Substation	1984
117A	51	S	Electricity Substation	1968
118A	77	SE	Electricity Substation	1994
119AD	82	NE	Electricity Substation	1996
120AD	82	NE	Electricity Substation	1975
121AD	84	NE	Electricity Substation	1987
122AD	85	N	Electricity Substation	1975
123O	271	NW	Electricity Substation	1996
124O	271	NW	Electricity Substation	1994
125O	271	NW	Electricity Substation	1987
126	274	NW	Electricity Substation	1992
127AE	460	SW	Electricity Substation	1968
128AE	460	SW	Electricity Substation	1968
129AF	461	W	Electricity Substation	1984
130AE	463	SW	Electricity Substation	1992
131AE	463	SW	Electricity Substation	1984
132AF	467	W	Electricity Substation	
133AF	467	W	Electricity Substation	
134AF	469	W	Electricity Substation	

1.4 Additional Information – Historical Petrol and Fuel Site Database

The systematic analysis of data extracted from High Detailed 1:1,250 and 1:2,500 scale historical maps provides the following information.

Records of historical petrol stations and fuel sites within 500m of the search boundary:

0

Database searched and no data found.

1.5 Additional Information – Historical Garage and Motor Vehicle Repair Database

The systematic analysis of data extracted from High Detailed 1:1,250 and 1:2,500 scale historical maps provides the following information.

Records of historical garage and motor vehicle repair sites within 500m of the search boundary: 5

ID	Distance (m)	Direction	Use	Date
135AG	481	NE	Garage	1992
136AG	481	NE	Garage	1985
137AG	481	NE	Garage	1959
138AG	481	NE	Garage	1976
139AG	482	NE	Garage	1987

1.6 Historical military sites

Certain military installations were not noted on historic mapping for security reasons. Whilst not all military land is necessarily of concern, Groundsure has researched and digitised a number of Ordnance Factories and other military industrial features (e.g. Ordnance Depots, Munitions Testing Grounds) which may be of contaminative concern. This research was drawn from a number of different sources, and should not be regarded as a definitive or exhaustive database of potentially contaminative military installations. The boundaries of sites within this database have been estimated from the best evidence available to Groundsure at the time of compilation.

Records of historical military sites within 500m of the search boundary: 0

Database searched and no data found.

1.7 Potentially Infilled Land

Records of Potentially Infilled Features from 1:10,000 scale mapping within 500m of the study site: 44

The following Historical Potentially Infilled Features derived from the Historical Mapping information is provided by Groundsure:

ID	Distance(m)	Direction	Use	Date
140A	49	S	Pond	1970
141A	62	S	Pond	1892
142AD	62	N	Unspecified Pit	1968
143AH	72	NW	Refuse Heap	1904
144F	90	NW	Unspecified Heap	1948
145F	90	NW	Unspecified Heap	1951
146F	94	NW	Unspecified Heap	1932
147F	94	NW	Unspecified Heap	1932
148AI	110	S	Pond	1970
149AI	111	S	Pond	1955
150AI	112	S	Reservoir	1948
151AI	112	S	Reservoir	1904
152AI	113	S	Reservoir	1932
153AI	121	S	Pond	1892
154	155	SE	Reservoir	1955
155L	248	NE	Cuttings	1948

156M	250	NE	Cuttings	1951
157L	251	NE	Cuttings	1904
158L	251	NE	Cuttings	1932
159M	257	NE	Cuttings	1892
160Q	274	W	Refuse Heap	1892
161L	278	NE	Cuttings	1951
162Q	280	W	Refuse Heap	1904
163Q	280	W	Refuse Heap	1948
164R	282	W	Unspecified Heap	1980
165R	282	W	Unspecified Heap	1970
166L	282	E	Cuttings	1892
167AJ	301	S	Pond	1970
168AJ	301	S	Reservoir	1955
169AJ	301	S	Pond	1980
170AJ	304	S	Reservoir	1904
171AJ	304	S	Reservoir	1948
172AJ	306	S	Reservoir	1932
173AJ	312	S	Pond	1892
174V	365	NW	Cuttings	1892
175T	379	E	Cuttings	1979
176T	379	E	Cuttings	1993
177U	391	NW	Cuttings	1904
178U	391	NW	Cuttings	1948
179V	391	NW	Cuttings	1951
180V	391	NW	Cuttings	1968
181V	391	NW	Cuttings	1990
182V	391	NW	Cuttings	1977
183U	392	NW	Cuttings	1932

2. Environmental Permits, Incidents and Registers Map



© Crown copyright and database rights 2019.
Ordnance Survey licence 100035207.

- | | | |
|--------------------|-------------------------------|--|
| Site Outline | Recorded Pollution Incident | RAS 3 & 4 Authorisations |
| Search Buffers (m) | Dangerous Substances (List 1) | Part A(1) Authorised Processes and Historic IPC Authorisations |
| | Dangerous Substances (List 2) | Part A(2) and Part B Authorised Processes |
| | Water Industry Referrals | COMAH / NIHHS Sites |
| | Licenced Discharge Consents | Sites Determined as Contaminated Land |
| | Red List Discharge Consents | Hazardous Substance Consents and Enforcements |

2. Environmental Permits, Incidents and Registers

2.1 Industrial Sites Holding Licences and/or Authorisations

Searches of information provided by the Environment Agency/Natural Resources Wales and Local Authorities reveal the following information:

2.1.1 Records of historic IPC Authorisations within 500m of the study site:

0

Database searched and no data found.

2.1.2 Records of Part A(1) and IPPC Authorised Activities within 500m of the study site:

0

Database searched and no data found.

2.1.3 Records of Red List Discharge Consents (potentially harmful discharges to controlled waters) within 500m of the study site:

0

Database searched and no data found.

2.1.4 Records of List 1 Dangerous Substances Inventory Sites within 500m of the study site:

0

Database searched and no data found.

2.1.5 Records of List 2 Dangerous Substance Inventory Sites within 500m of the study site:

0

Database searched and no data found.

2.1.6 Records of Part A(2) and Part B Activities and Enforcements within 500m of the study site:

1

The following Part A(2) and Part B Activities are represented as points on the Environmental Permits, Incidents and Registers Map:

ID	Distance (m)	Direction	NGR	Details
4	495	NE	420080 410504	Address: Shepley Coachworks Ltd, Abbey Rd, Shepley, Huddersfield, HD8 8EP Process: Respraying of Road Vehicles Status: Historical Permit Permit Type: Part B Enforcement: No Enforcements Notified Date of Enforcement: No Enforcements Notified Comment: No Enforcements Notified

2.1.7 Records of Category 3 or 4 Radioactive Substances Authorisations:

0

Database searched and no data found.

2.1.8 Records of Licensed Discharge Consents within 500m of the study site:

1

The following Licensed Discharge Consents records are represented as points on the Environmental Permits, Incidents and Registers Map:

ID	Distance (m)	Direction	NGR	Details
3	0	On Site	419810 409950	Address: TRANS CONT, TRANS CONT, TRANS CONT, TRANS CONT, TRANS-CONT Effluent Type: TRADE DISCHARGES - UNSPECIFIED Permit Number: 3624 Permit Version: 1 Receiving Water: TRIB. STREAM OF SHEPLEY DIKE Status: REVOKED - UNSPECIFIED Issue date: 27/05/1982 Effective Date: 27-May-1982 Revocation Date: 12/03/1991

2.1.9 Records of Water Industry Referrals (potentially harmful discharges to the public sewer) within 500m of the study site:

0

Database searched and no data found.

2.1.10 Records of Planning Hazardous Substance Consents and Enforcements within 500m of the study site:

0

Database searched and no data found.

2.2 Dangerous or Hazardous Sites

Records of COMAH & NIHHS sites within 500m of the study site:

0

Database searched and no data found.

2.3 Environment Agency/Natural Resources Wales Recorded Pollution Incidents

2.3.1 Records of National Incidents Recording System, List 2 within 500m of the study site:

2

The following NIRS List 2 records are represented as points on the Environmental Permits, Incidents and Registers Map:

ID	Distance (m)	Direction	NGR	Details
1	183	N	419897.0 410246.0	Incident Date: 09-Feb-2002 Incident Identification: 57405.0 Pollutant: Oils and Fuel Pollutant Description: Gas and Fuel Oils Water Impact: Category 3 (Minor) Land Impact: Category 4 (No Impact) Air Impact: Category 4 (No Impact)
2	459	SW	419347.0 409734.0	Incident Date: 14-Oct-2015 Incident Identification: 1380682.0 Pollutant: Pollutant Not Identified Pollutant Description: Not Identified Water Impact: Category 2 (Significant) Land Impact: Category 3 (Minor) Air Impact: Category 4 (No Impact)

2.3.2 Records of National Incidents Recording System, List 1 within 500m of the study site:

0

Database searched and no data found.

2.4 Sites Determined as Contaminated Land under Part 2A EPA 1990


Records of sites determined as contaminated land under Section 78R of the Environmental Protection Act 1990 are there within 500m of the study site 0

Database searched and no data found.

3. Landfill and Other Waste Sites Map



© Crown copyright and database rights 2019.
Ordnance Survey licence 100035207.

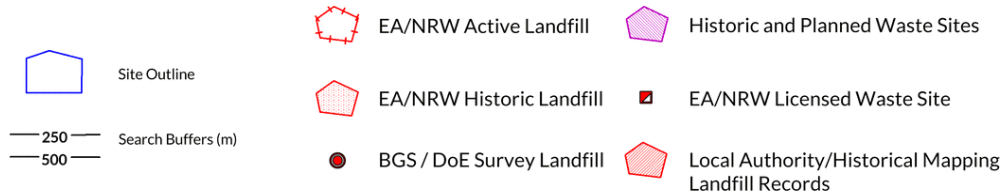

3. Landfill and Other Waste Sites

3.1 Landfill Sites

3.1.1 Records from Environment Agency/Natural Resources Wales landfill data within 1000m of the study site:

0

Database searched and no data found.

3.1.2 Records of Environment Agency/Natural Resources Wales historic landfill sites within 1500m of the study site:

4

The following landfill records are represented as either points or polygons on the Landfill and Other Waste Sites map:

ID	Distance (m)	Direction	NGR	Details
1	144	E		Site Address: The Knowle, Shepley Waste Licence: - Site Reference: - Waste Type: Inert, Industrial Environmental Permitting Regulations (Waste) Reference: - Licence Issue: Licence Surrendered: Licence Holder Address: - Operator: - Licence Holder: - First Recorded: - Last Recorded: -
Not shown	1156	S		Site Address: Lane Head Quarry, Lane Head, Shepley, Near Huddersfield Waste Licence: Yes Site Reference: 4700/0246, 446 Waste Type: Inert, Commercial Environmental Permitting Regulations (Waste) Reference: - Licence Issue: 14-Aug-1980 Licence Surrendered: Licence Holder Address: Haigh Lane, Hoylandswaine, Sheffield Operator: - Licence Holder: H C W Makings and Son First Recorded: - Last Recorded: -
Not shown	1270	NW		Site Address: Cote Close, Dam Hill, Shirley Waste Licence: - Site Reference: - Waste Type: Household Environmental Permitting Regulations (Waste) Reference: - Licence Issue: Licence Surrendered: Licence Holder Address: - Operator: - Licence Holder: - First Recorded: - Last Recorded: -
Not shown	1399	N		Site Address: Hawthorne Way, Shelley Waste Licence: - Site Reference: - Waste Type: Inert, Commercial Environmental Permitting Regulations (Waste) Reference: - Licence Issue: Licence Surrendered: Licence Holder Address: - Operator: David Wilson Homes Licence Holder: - First Recorded: 01-Jan-1996 Last Recorded: 31-Dec-1999

3.1.3 Records of BGS/DoE non-operational landfill sites within 1500m of the study site:

0

Database searched and no data found.

3.1.4 Records of Landfills from Local Authority and Historical Mapping Records within 1500m of the study site:

0

Database searched and no data found.

3.2 Other Waste Sites

3.2.1 Records of waste treatment, transfer or disposal sites within 500m of the study site:

0


Database searched and no data found.

3.2.2 Records of Environment Agency/Natural Resources Wales licensed waste sites within 1500m of the study site:

2

The following waste treatment, transfer or disposal sites records are represented as points on the Landfill and Other Waste Sites map:

ID	Distance (m)	Direction	NGR	Details
Not shown	1063	NE	420858 410478	Site Address: Unit 7 Barncliffe Mills, Long Moor Lane, Shelley, Huddersfield, West Yorkshire, HD8 8LU Type: Vehicle Depollution Facility <5000 tps Size: < 25000 tonnes Environmental Permitting Regulations (Waste) Licence Number: HUD015 EPR reference: EA/EPR/BB3005FW/V002 Operator: Huddersfield Volvo Breakers Ltd Waste Management licence No: 401028 Annual Tonnage: 4999.0 Issue Date: 03/02/2014 Effective Date: - Modified: 26/05/2015 Surrendered Date: - Expiry Date: - Cancelled Date: - Status: Modified Site Name: Huddersfield Volvo Breakers Ltd Correspondence Address: -
Not shown	1177	S	419690 408738	Site Address: Carr Hill Quarry, Carr Hill Road, Upper Cumberworth, Huddersfield, West Yorkshire, HD8 8XN Type: Inert & excavation Waste TS + treatment Size: < 25000 tonnes Environmental Permitting Regulations (Waste) Licence Number: PMW002 EPR reference: EA/EPR/DB3031AT/A001 Operator: P M W Quarries Ltd Waste Management licence No: 103536 Annual Tonnage: 74999.0 Issue Date: 04/01/2012 Effective Date: - Modified: - Surrendered Date: - Expiry Date: - Cancelled Date: - Status: Issued Site Name: Carr Hill Quarry Correspondence Address: -



4. Current Land Uses

4.1 Current Industrial Data

Records of potentially contaminative industrial sites within 250m of the study site:

10

The following records are represented as points on the Current Land Uses map.

ID	Distance (m)	Direction	Company	NGR	Address	Activity	Category
1A	4	SE	Tank	419841 409974	West Yorkshire, HD8	Tanks (Generic)	Industrial Features
2A	4	SE	Tank	419845 409979	West Yorkshire, HD8	Tanks (Generic)	Industrial Features
3A	5	SE	Tank	419838 409969	West Yorkshire, HD8	Tanks (Generic)	Industrial Features
4	5	SE	Shepley Spring	419807 409923	Eastfield Mills, The Knowle, Shepley, Huddersfield, West Yorkshire, HD8 8EA	Non Alcoholic Drinks	Foodstuffs
5	13	SE	Tank	419827 409938	West Yorkshire, HD8	Tanks (Generic)	Industrial Features
6	61	SE	Xtex Polythene Ltd	419827 409861	The Knowle, Shepley, Huddersfield, West Yorkshire, HD8 8EA	Rubber, Silicones and Plastics	Industrial Products
7	84	N	Electricity Sub Station	419869 410150	West Yorkshire, HD8	Electrical Features	Infrastructure and Facilities
8	104	SE	Chimney	419840 409818	West Yorkshire, HD8	Chimneys	Industrial Features
9	111	N	Works	419817 410181	West Yorkshire, HD8	Unspecified Works Or Factories	Industrial Features
10	207	E	Crested & Country Ltd	420091 410064	The Old Barn, The Knowle, Shepley, Huddersfield, West Yorkshire, HD8 8EA	Clothing, Components and Accessories	Consumer Products

4.2 Petrol and Fuel Sites

Records of petrol or fuel sites within 500m of the study site:

0

Database searched and no data found.

4.3 National Grid High Voltage Underground Electricity Transmission Cables

This dataset identifies the high voltage electricity transmission lines running between generating power plants and electricity substations. The dataset does not include the electricity distribution network (smaller, lower voltage cables distributing power from substations to the local user network). This information has been extracted from databases held by National Grid and is provided for information only with no guarantee as to its completeness or accuracy. National Grid do not offer any warranty as to the accuracy of the available data and are excluded from any liability for any such inaccuracies or errors.

Records of National Grid high voltage underground electricity transmission cables within 500m of the study site:

0

Database searched and no data found.

4.4 National Grid High Pressure Gas Transmission Pipelines

This dataset identifies high-pressure, large diameter pipelines which carry gas between gas terminals, power stations, compressors and storage facilities. The dataset does not include the Local Transmission System (LTS) which supplies gas directly into homes and businesses. This information has been extracted from databases held by National Grid and is provided for information only with no guarantee as to its completeness or accuracy. National Grid do not offer any warranty as to the accuracy of the available data and are excluded from any liability for any such inaccuracies or errors.

Records of National Grid high pressure gas transmission pipelines within 500m of the study site:

0

Database searched and no data found.

5. Geology

5.1 Artificial Ground and Made Ground

Database searched and no data found.

The database has been searched on site, including a 50m buffer.

5.2 Superficial Ground and Drift Geology

Database searched and no data found.

The database has been searched on site, including a 50m buffer.

5.3 Bedrock and Solid Geology


The database has been searched on site, including a 50m buffer.

Lex Code	Description	Rock Type
GR-SDST	GRENOSIDE SANDSTONE	SANDSTONE
PLCM-MDSS	PENNINE LOWER COAL MEASURES FORMATION	MUDSTONE, SILTSTONE AND SANDSTONE


(Derived from the BGS 1:50,000 Digital Geological Map of Great Britain)

6 Hydrogeology and Hydrology

6a. Aquifer Within Superficial Geology

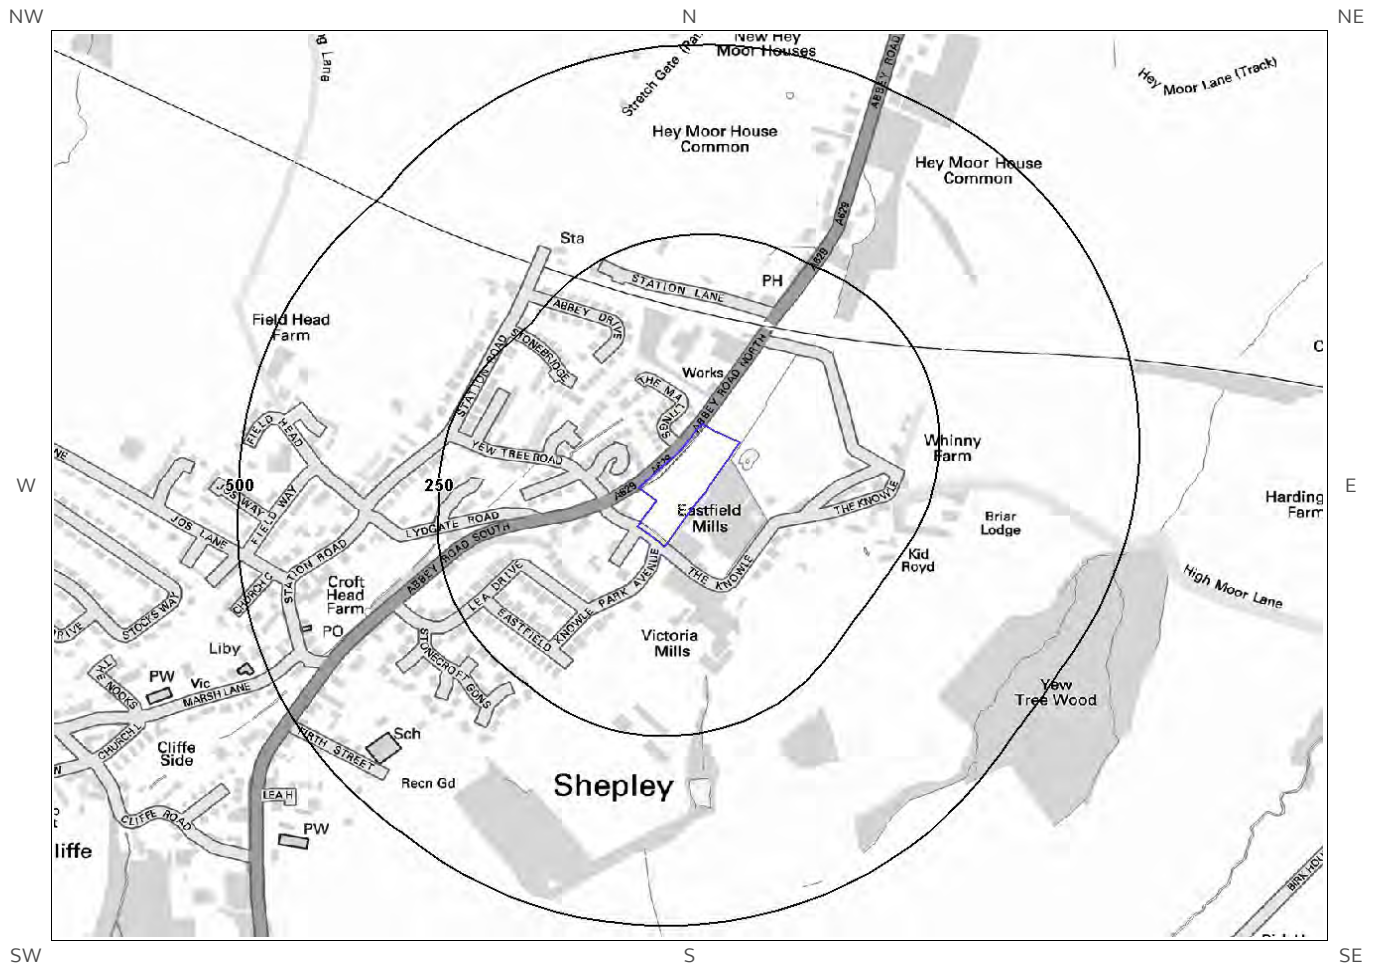


© Crown copyright and database rights 2019
Ordnance Survey licence 100035207.

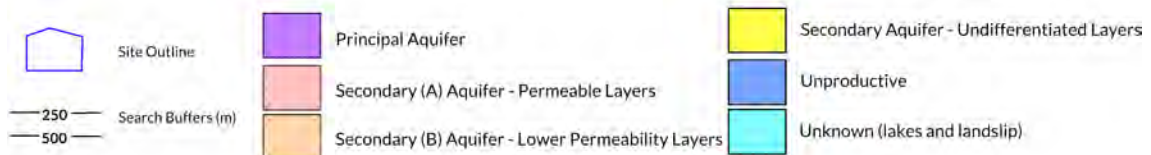


6b. Aquifer Within Bedrock Geology and Abstraction Licences




© Crown copyright and database rights 2019
Ordnance Survey licence 100035207.

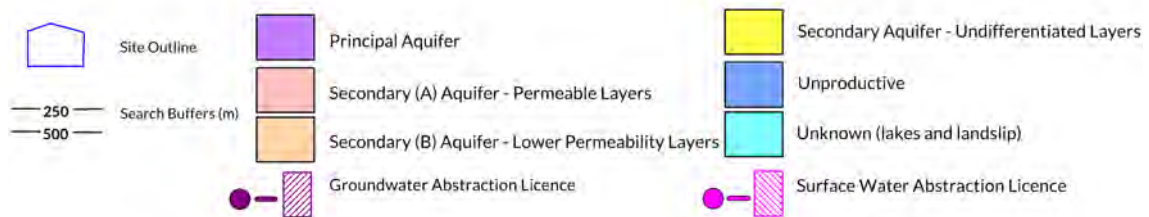


6c. Hydrogeology – Source Protection Zones and Potable Water Abstraction Licences

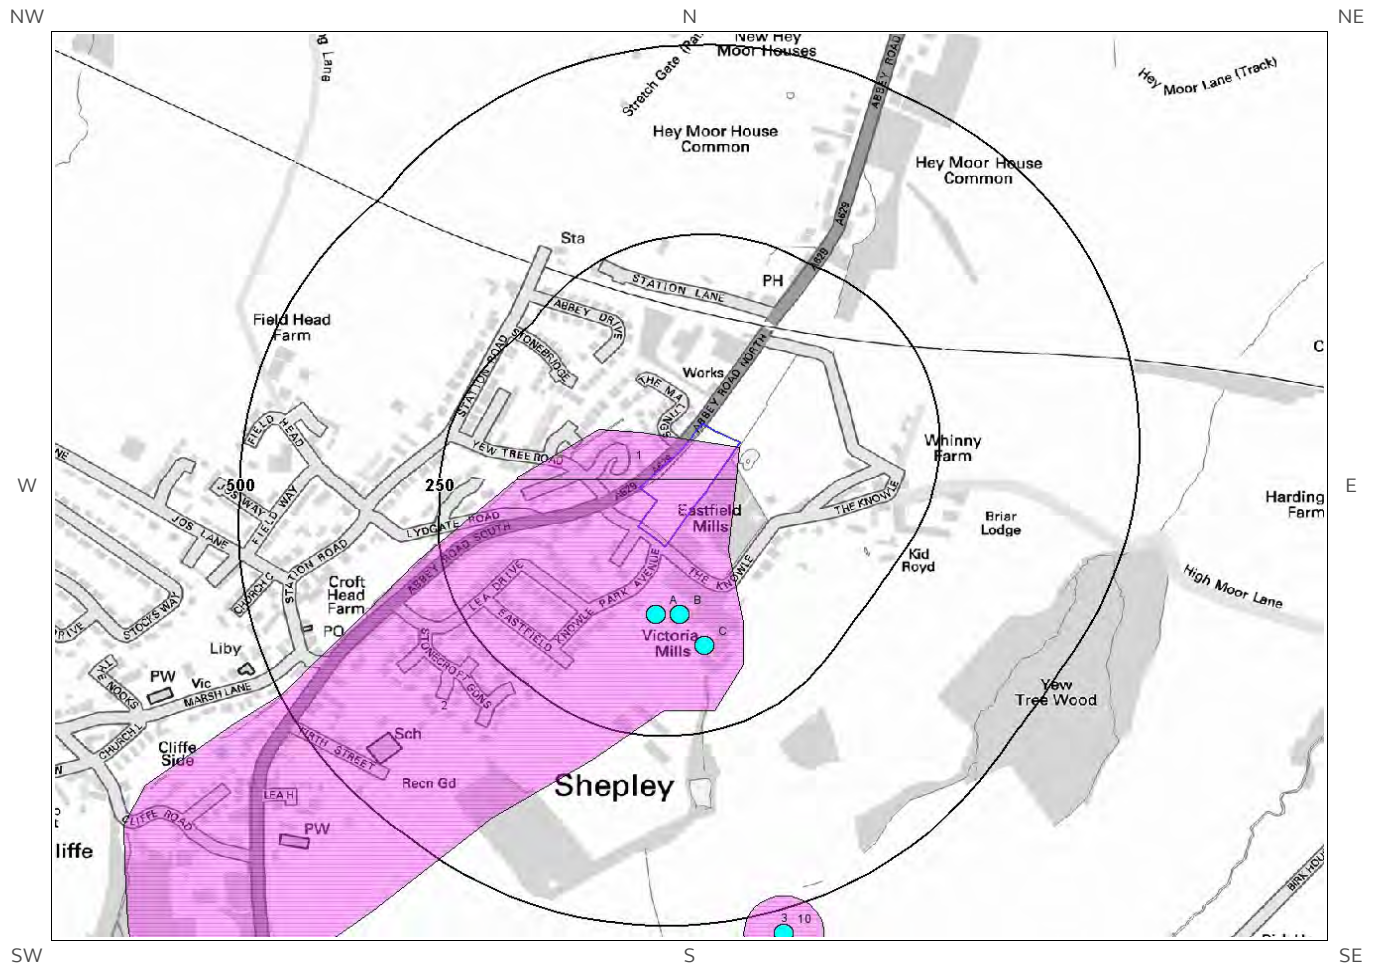


© Crown copyright and database rights 2019
Ordnance Survey licence 100035207.

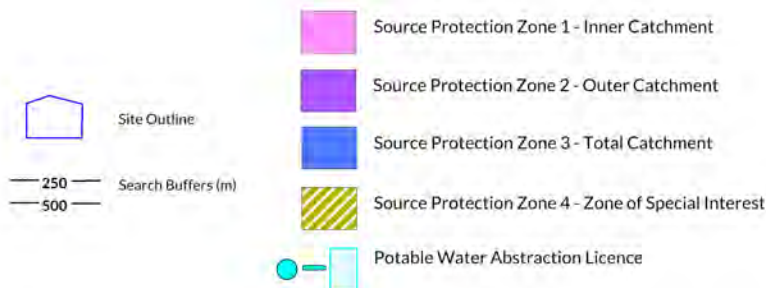


6d. Hydrogeology – Source Protection Zones within confined aquifer

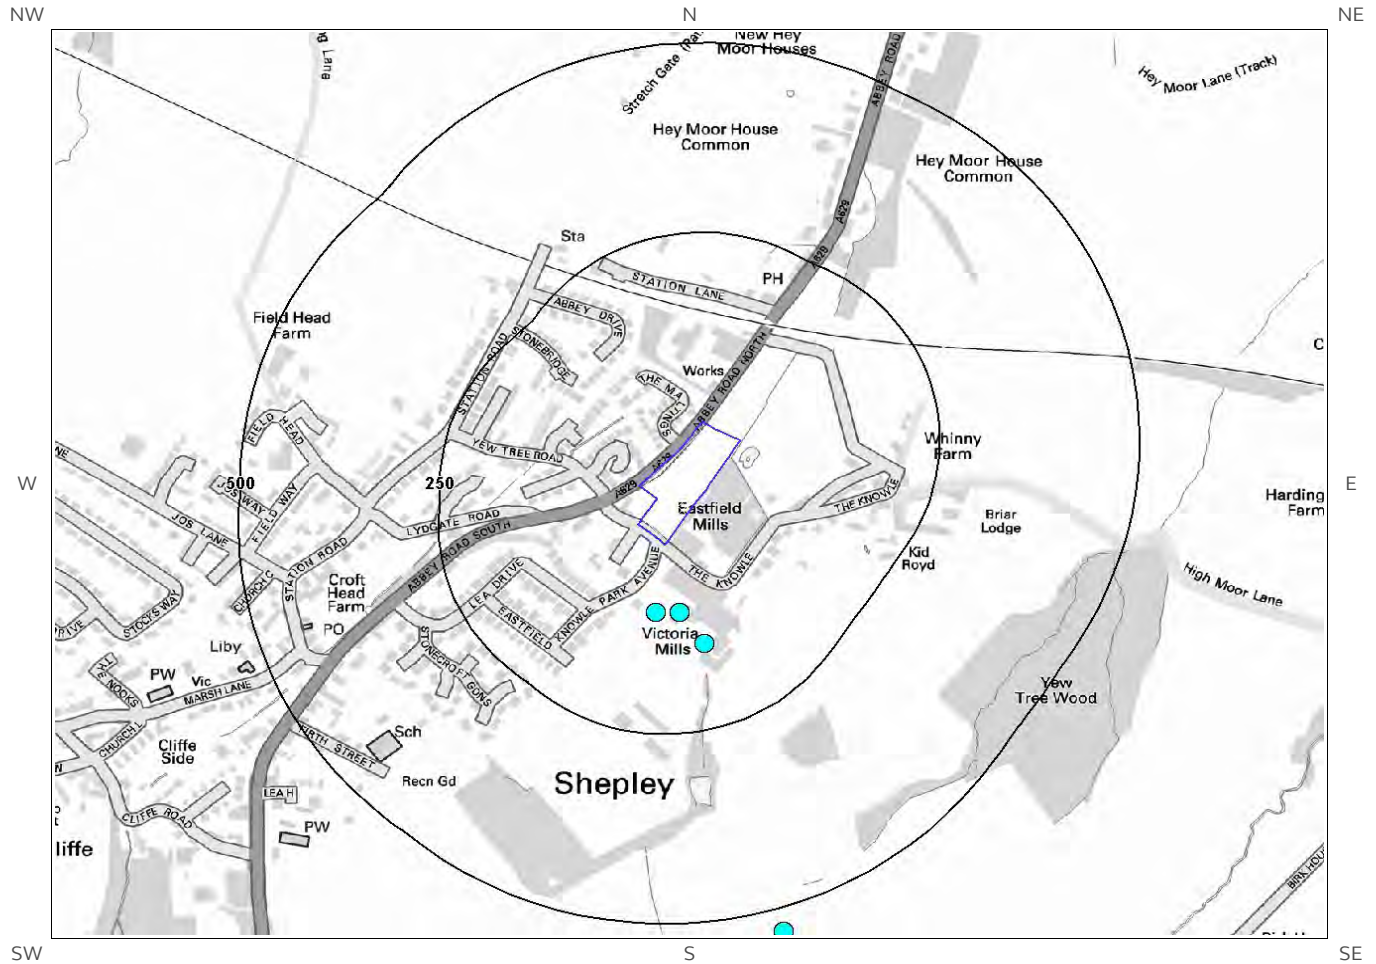

© Crown copyright and database rights 2019
Ordnance Survey licence 100035207.

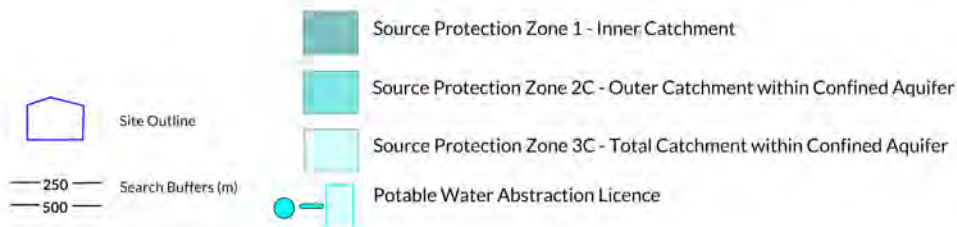

6e. Hydrology – Watercourse Network and River Quality

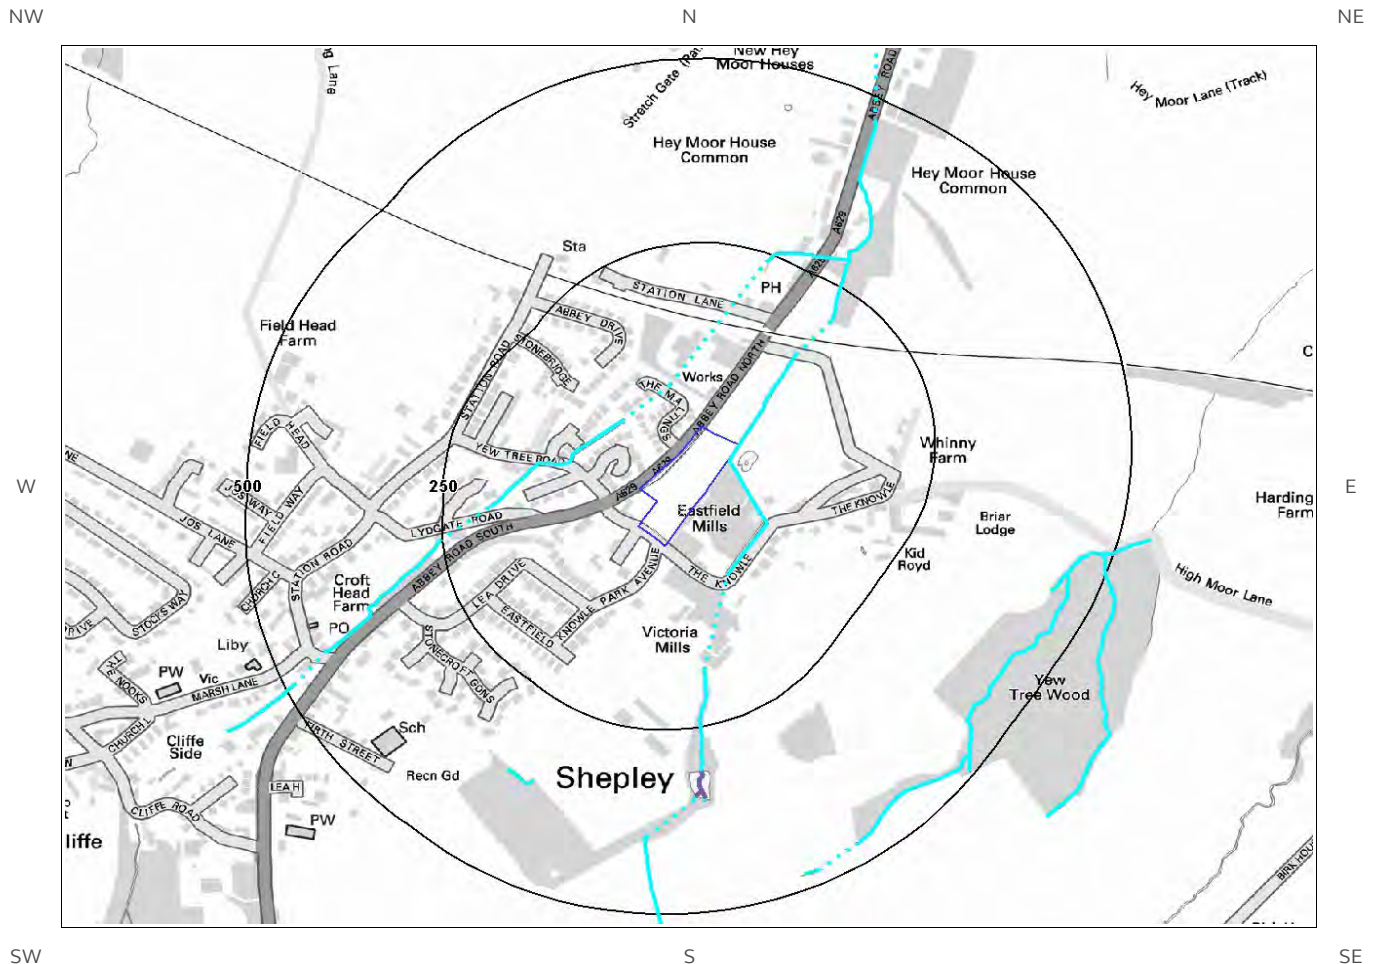

© Crown copyright and database rights 2019.
Ordnance Survey licence 100035207.



6. Hydrogeology and Hydrology

6.1 Aquifer within Superficial Deposits

Records of strata classification within the superficial geology at or in proximity to the property No

Database searched and no data found.

From 1 April 2010, the Environment Agency/Natural Resources Wales's Groundwater Protection Policy has been using aquifer designations consistent with the Water Framework Directive. For further details on the designation and interpretation of this information, please refer to the Groundsure Enviro Insight User Guide.

6.2 Aquifer within Bedrock Deposits

Records of strata classification within the bedrock geology at or in proximity to the property Yes

From 1 April 2010, the Environment Agency/Natural Resources Wales's Groundwater Protection Policy has been using aquifer designations consistent with the Water Framework Directive. For further details on the designation and interpretation of this information, please refer to the Groundsure Enviro Insight User Guide.

The following aquifer records are shown on the Aquifer within Bedrock Geology Map (6b):

ID	Distance (m)	Direction	Designation	Description
1	0	On Site	Secondary A	Permeable layers capable of supporting water supplies at a local rather than strategic scale, and in some cases forming an important source of base flow to rivers. These are generally aquifers formerly classified as minor aquifers
2	0	On Site	Secondary A	Permeable layers capable of supporting water supplies at a local rather than strategic scale, and in some cases forming an important source of base flow to rivers. These are generally aquifers formerly classified as minor aquifers
3	115	E	Secondary A	Permeable layers capable of supporting water supplies at a local rather than strategic scale, and in some cases forming an important source of base flow to rivers. These are generally aquifers formerly classified as minor aquifers
4	124	SE	Secondary A	Permeable layers capable of supporting water supplies at a local rather than strategic scale, and in some cases forming an important source of base flow to rivers. These are generally aquifers formerly classified as minor aquifers

6.3 Groundwater Abstraction Licences

Groundwater Abstraction Licences within 2000m of the study site

Identified

The following Abstraction Licences records are represented as points, lines and regions on the Aquifer within Bedrock Geology Map (6b):

ID	Distance (m)	Direction	NGR	Details
5A	91	S	419780 409820	Status: Historical Licence No: 2/27/11/030 Details: Water Bottling Direct Source: GROUNDWATERS Point: BOREHOLE - LOWER COAL MEASURES - EASTFIELD MILL SHEPLEY Data Type: Point Name: PENMOOR UK LIMITED Annual Volume (m³): - Max Daily Volume (m³): - Original Application No: - Original Start Date: 14/12/1965 Expiry Date: - Issue No: 101 Version Start Date: 01/07/2000 Version End Date:
6A	91	S	419780 409820	Status: Active Licence No: 2/27/11/030 Details: Water Bottling Direct Source: GROUNDWATERS Point: BOREHOLE - LOWER COAL MEASURES - SHEPLEY Data Type: Point Name: PENMOOR UK LTD Annual Volume (m³): 77000 Max Daily Volume (m³): 211 Original Application No: - Original Start Date: 14/12/1965 Expiry Date: - Issue No: 103 Version Start Date: 21/02/2011 Version End Date:
7B	92	S	419810 409820	Status: Historical Licence No: 2/27/11/030 Details: Water Bottling Direct Source: GROUNDWATERS Point: BOREHOLE - LOWER COAL MEASURES - EASTFIELD MILLS SHEPLEY Data Type: Point Name: PENMOOR UK LIMITED Annual Volume (m³): - Max Daily Volume (m³): - Original Application No: - Original Start Date: 14/12/1965 Expiry Date: - Issue No: 101 Version Start Date: 01/07/2000 Version End Date:
8B	92	S	419810 409820	Status: Active Licence No: 2/27/11/030 Details: Water Bottling Direct Source: GROUNDWATERS Point: BOREHOLE - LOWER COAL MEASURES - SHEPLEY Data Type: Point Name: PENMOOR UK LTD Annual Volume (m³): 77000 Max Daily Volume (m³): 211 Original Application No: - Original Start Date: 14/12/1965 Expiry Date: - Issue No: 103 Version Start Date: 21/02/2011 Version End Date:
9C	139	S	419840 409780	Status: Historical Licence No: 2/27/11/030 Details: Water Bottling Direct Source: GROUNDWATERS Point: BOREHOLE - LOWER COAL MEASURES - EASTFIELD MILLS SHEPLEY Data Type: Point Name: PENMOOR UK LIMITED Annual Volume (m³): - Max Daily Volume (m³): - Original Application No: - Original Start Date: 14/12/1965 Expiry Date: - Issue No: 101 Version Start Date: 01/07/2000 Version End Date:
10C	139	S	419840 409780	Status: Active Licence No: 2/27/11/030 Details: Water Bottling Direct Source: GROUNDWATERS Point: BOREHOLE - LOWER COAL MEASURES - SHEPLEY Data Type: Point Name: PENMOOR UK LTD Annual Volume (m³): 77000 Max Daily Volume (m³): 211 Original Application No: - Original Start Date: 14/12/1965 Expiry Date: - Issue No: 103 Version Start Date: 21/02/2011 Version End Date:

ID	Distance (m)	Direction	NGR	Details	
11	532	S	419940 409400	Status: Historical Licence No: 2/27/11/189 Details: Water Bottling Direct Source: GROUNDWATERS Point: BOREHOLE-COAL MEASURES-SHEPLEY Data Type: Point Name: SHEPLEY SPRING LTD	Annual Volume (m³): 122640 Max Daily Volume (m³): 336 Original Application No: - Original Start Date: 23/01/2004 Expiry Date: 31/03/2015 Issue No: 1 Version Start Date: 23/01/2004 Version End Date:
Not shown	847	S	420000 409090	Status: Historical Licence No: 2/27/11/189 Details: Water Bottling Direct Source: GROUNDWATERS Point: BOREHOLE-COAL MEASURES-SHEPLEY Data Type: Point Name: SHEPLEY SPRING LTD	Annual Volume (m³): 122640 Max Daily Volume (m³): 336 Original Application No: - Original Start Date: 23/01/2004 Expiry Date: 31/03/2015 Issue No: 1 Version Start Date: 23/01/2004 Version End Date:
Not shown	1674	NE	421100 411200	Status: Historical Licence No: 2/27/11/187 Details: Spray Irrigation - Direct Direct Source: GROUNDWATERS Point: BOREHOLE-LOWER COAL MEASURES-PENNINE GARDEN CENTRE, HUDDS Data Type: Point Name: ARMITAGE & SONS T/A ARMITAGE GARDEN CENTRE	Annual Volume (m³): - Max Daily Volume (m³): - Original Application No: - Original Start Date: 11/04/2001 Expiry Date: 31/03/2015 Issue No: 1 Version Start Date: 11/04/2001 Version End Date:
Not shown	1674	NE	421100 411200	Status: Historical Licence No: 2/27/11/187 Details: Spray Irrigation - Direct Direct Source: GROUNDWATERS Point: BOREHOLE-LOWER COAL MEASURES-PENNINE GARDEN CENTRE Data Type: Point Name: ARMITAGE GARDEN CENTRE	Annual Volume (m³): 10000 Max Daily Volume (m³): 50 Original Application No: - Original Start Date: 11/04/2001 Expiry Date: 31/03/2015 Issue No: 1 Version Start Date: 11/04/2001 Version End Date:
Not shown	1771	NE	420900 411500	Status: Historical Licence No: 2/27/11/178 Details: General Farming & Domestic Direct Source: GROUNDWATERS Point: BOREHOLE Data Type: Point Name: DEARNLEY	Annual Volume (m³): - Max Daily Volume (m³): - Original Application No: - Original Start Date: 07/11/1995 Expiry Date: - Issue No: 100 Version Start Date: 07/11/1995 Version End Date:
Not shown	1771	NE	420900 411500	Status: Active Licence No: 2/27/11/178 Details: General Farming & Domestic Direct Source: GROUNDWATERS Point: BOREHOLE - COAL MEASURES - SHELLEY Data Type: Point Name: DEARNLEY	Annual Volume (m³): 9855 Max Daily Volume (m³): 27 Original Application No: - Original Start Date: 07/11/1995 Expiry Date: - Issue No: 100 Version Start Date: 01/04/2008 Version End Date:
Not shown	1966	E	421800 409600	Status: Historical Licence No: 2/27/11/124 Details: General use relating to Secondary Category (High Loss) Direct Source: GROUNDWATERS Point: SPRING - COAL MEASURES - DAY HOLE WORKINGS Data Type: Point Name: HEPWORTH PIPE CO LTD	Annual Volume (m³): 6819 Max Daily Volume (m³): 27.27 Original Application No: - Original Start Date: 26/05/1966 Expiry Date: - Issue No: 100 Version Start Date: 26/05/1966 Version End Date:

6.4 Surface Water Abstraction Licences

Surface Water Abstraction Licences within 2000m of the study site

Identified

The following Surface Water Abstraction Licences records are represented as points, lines and regions on the Aquifer within Bedrock Geology Map (6b):

ID	Distance (m)	Direction	NGR	Details
Not shown	1714	S	419900 408200	Status: Historical Licence No: 2/27/08/052 Details: General use relating to Secondary Category (Medium Loss) Direct Source: SURFACE WATER Point: RIVER DEARNE & MUNCHCLIFFE BK Data Type: Point Name: HINCHCLIFFE & SONS LTD Annual Volume (m³): - Max Daily Volume (m³): - Application No: - Original Start Date: 17/03/1966 Expiry Date: - Issue No: 101 Version Start Date: 24/12/1999 Version End Date:
Not shown	1902	S	419870 408010	Status: Historical Licence No: 2/27/08/052 Details: General Use Relating To Secondary Category (Medium Loss) Direct Source: SURFACE WATER Point: RIVER DEARNE AND MUNCHCLIFFE BECK Data Type: Point Name: HINCHCLIFFE & SONS LTD Annual Volume (m³): 68182 Max Daily Volume (m³): 500 Application No: - Original Start Date: 17/03/1966 Expiry Date: - Issue No: 101 Version Start Date: 24/12/1999 Version End Date:
Not shown	1978	S	420120 407960	Status: Historical Licence No: 2/27/08/052 Details: General Use Relating To Secondary Category (Medium Loss) Direct Source: SURFACE WATER Point: RIVER DEARNE AND MUNCHCLIFFE BECK Data Type: Point Name: HINCHCLIFFE & SONS LTD Annual Volume (m³): 68182 Max Daily Volume (m³): 500 Application No: - Original Start Date: 17/03/1966 Expiry Date: - Issue No: 101 Version Start Date: 24/12/1999 Version End Date:
Not shown	1979	S	420127 407960	Status: Historical Licence No: 2/27/08/052 Details: General Use Relating To Secondary Category (Medium Loss) Direct Source: SURFACE WATER Point: RIVER DEARNE AND MUNCHCLIFFE BECK Data Type: Point Name: HINCHCLIFFE & SONS LTD Annual Volume (m³): 68182 Max Daily Volume (m³): 500 Application No: - Original Start Date: 17/03/1966 Expiry Date: - Issue No: 101 Version Start Date: 24/12/1999 Version End Date:

6.5 Potable Water Abstraction Licences

Potable Water Abstraction Licences within 2000m of the study site

Identified

The following Potable Water Abstraction Licences records are represented as points, lines and regions on the SPZ and Potable Water Abstraction Licences Map (6c):

ID	Distance (m)	Direction	NGR	Details
4A	91	S	419780 409820	Status: Historical Licence No: 2/27/11/030 Details: Water Bottling Direct Source: GROUNDWATERS Point: BOREHOLE - LOWER COAL MEASURES - EASTFIELD MILL SHEPLEY Data Type: Point Annual Volume (m³): - Max Daily Volume (m³): - Original Application No: - Original Start Date: 14/12/1965 Expiry Date: - Issue No: 101 Version Start Date:

ID	Distance (m)	Direction	NGR	Details	
				Name: PENMOOR UK LIMITED	Version End Date:
5A	91	S	419780 409820	Status: Active Licence No: 2/27/11/030 Details: Water Bottling Direct Source: GROUNDWATERS Point: BOREHOLE - LOWER COAL MEASURES - SHEPLEY Data Type: Point Name: PENMOOR UK LTD	Annual Volume (m³): 77000 Max Daily Volume (m³): 211 Original Application No: - Original Start Date: 14/12/1965 Expiry Date: - Issue No: 103 Version Start Date: Version End Date:
6B	92	S	419810 409820	Status: Historical Licence No: 2/27/11/030 Details: Water Bottling Direct Source: GROUNDWATERS Point: BOREHOLE - LOWER COAL MEASURES - EASTFIELD MILLS SHEPLEY Data Type: Point Name: PENMOOR UK LIMITED	Annual Volume (m³): - Max Daily Volume (m³): - Original Application No: - Original Start Date: 14/12/1965 Expiry Date: - Issue No: 101 Version Start Date: Version End Date:
7B	92	S	419810 409820	Status: Active Licence No: 2/27/11/030 Details: Water Bottling Direct Source: GROUNDWATERS Point: BOREHOLE - LOWER COAL MEASURES - SHEPLEY Data Type: Point Name: PENMOOR UK LTD	Annual Volume (m³): 77000 Max Daily Volume (m³): 211 Original Application No: - Original Start Date: 14/12/1965 Expiry Date: - Issue No: 103 Version Start Date: Version End Date:
8C	139	S	419840 409780	Status: Historical Licence No: 2/27/11/030 Details: Water Bottling Direct Source: GROUNDWATERS Point: BOREHOLE - LOWER COAL MEASURES - EASTFIELD MILLS SHEPLEY Data Type: Point Name: PENMOOR UK LIMITED	Annual Volume (m³): - Max Daily Volume (m³): - Original Application No: - Original Start Date: 14/12/1965 Expiry Date: - Issue No: 101 Version Start Date: Version End Date:
9C	139	S	419840 409780	Status: Active Licence No: 2/27/11/030 Details: Water Bottling Direct Source: GROUNDWATERS Point: BOREHOLE - LOWER COAL MEASURES - SHEPLEY Data Type: Point Name: PENMOOR UK LTD	Annual Volume (m³): 77000 Max Daily Volume (m³): 211 Original Application No: - Original Start Date: 14/12/1965 Expiry Date: - Issue No: 103 Version Start Date: Version End Date:
10	532	S	419940 409400	Status: Historical Licence No: 2/27/11/189 Details: Water Bottling Direct Source: GROUNDWATERS Point: BOREHOLE-COAL MEASURES-SHEPLEY Data Type: Point Name: SHEPLEY SPRING LTD	Annual Volume (m³): 122640 Max Daily Volume (m³): 336 Original Application No: - Original Start Date: 23/01/2004 Expiry Date: 31/03/2015 Issue No: 1 Version Start Date: Version End Date:
Not shown	847	S	420000 409090	Status: Historical Licence No: 2/27/11/189 Details: Water Bottling Direct Source: GROUNDWATERS Point: BOREHOLE-COAL MEASURES-SHEPLEY Data Type: Point Name: SHEPLEY SPRING LTD	Annual Volume (m³): 122640 Max Daily Volume (m³): 336 Original Application No: - Original Start Date: 23/01/2004 Expiry Date: 31/03/2015 Issue No: 1 Version Start Date: Version End Date:

6.6 Source Protection Zones

Source Protection Zones within 500m of the study site

Identified

The following Source Protection Zones records are represented on the SPZ and Potable Water Abstraction Map (6c):

ID	Distance (m)	Direction	Zone	Description
1	0	On Site	1	Inner catchment
2	0	On Site	1	Inner catchment
3	481	S	1	Inner catchment

6.7 Source Protection Zones within Confined Aquifer

Source Protection Zones within the Confined Aquifer within 500m of the study site

None identified

Historically, Source Protection Zone maps have been focused on regulation of activities which occur at or near the ground surface, such as prevention of point source pollution and bacterial contamination of water supplies. Sources in confined aquifers were often considered to be protected from these surface pressures due to the presence of a low permeability confining layer (e.g. glacial till, clay). The increased interest in subsurface activities such as onshore oil and gas exploration, ground source heating and cooling requires protection zones for confined sources to be marked on SPZ maps where this has not already been done.

Database searched and no data found.

6.8 Groundwater Vulnerability and Soil Leaching Potential

Environment Agency/Natural Resources Wales information on groundwater vulnerability and soil leaching potential within 500m of the study site Identified

Distance (m)	Direction	Classification	Soil Vulnerability Category	Description
0	On Site	Minor Aquifer/High Leaching Potential	HU	Soil information for urban areas and restored mineral workings. These soils are therefore assumed to be highly permeable in the absence of site-specific information.
153	S	Minor Aquifer/Low Leaching Potential	L	Soils in which pollutants are unlikely to penetrate the soil layer because either water movement is largely horizontal, or they have the ability to attenuate diffuse pollutants.
215	E	Minor Aquifer/Low Leaching Potential	L	Soils in which pollutants are unlikely to penetrate the soil layer because either water movement is largely horizontal, or they have the ability to attenuate diffuse pollutants.
215	E	Minor Aquifer/Low Leaching Potential	L	Soils in which pollutants are unlikely to penetrate the soil layer because either water movement is largely horizontal, or they have the ability to attenuate diffuse pollutants.
342	NW	Minor Aquifer/High Leaching Potential	H3	Coarse textured or moderately shallow soils which readily transmit non-adsorbed pollutants and liquid discharges but have some ability to attenuate adsorbed pollutants because of their clay or organic matter content.

6.9 River Quality

Environment Agency/Natural Resources Wales information on river quality within 1500m of the study site Identified

6.9.1 Biological Quality:

Biological Quality data describes water quality in terms of 83 groups of macroinvertebrates, some of which are pollution sensitive. The results are graded from A ('Very Good') to F ('Bad').

The following Biological Quality records are shown on the Hydrology Map (6e):

ID	Distance (m)	Direction	NGR	River Quality Grade	Biological Quality Grade				
					2005	2006	2007	2008	2009
Not shown	1388	SE	420723 408882	River Name: Calder Reach: Lupset Beck Durkar Beck End/Start of Stretch: Start of Stretch NGR	E	E	E	E	E
Not shown	1388	SE	420723 408882	River Name: Fenay Beck Reach: Upper Cumberworth Woodsome Rd End/Start of Stretch: Start of Stretch NGR	E	E	E	E	E

6.9.2 Chemical Quality:

Chemical quality data is based on the General Quality Assessment Headline Indicators scheme (GQAH). In England, each chemical sample is measured for ammonia and dissolved oxygen. In Wales, the samples are measured for biological oxygen demand (BOD), ammonia and dissolved oxygen. The results are graded from A ('Very Good') to F ('Bad').

The following Chemical Quality records are shown on the Hydrology Map (6e):

ID	Distance (m)	Direction	NGR	River Quality Grade	Chemical Quality Grade				
					2005	2006	2007	2008	2009
Not shown	1388	SE	420723 408882	River Name: Fenay Beck/shepley Dike Reach: Upper Cumberworth Woodsome Rd End/Start of Stretch: Start of Stretch NGR	A	A	A	A	A

6.10 Ordnance Survey MasterMap Water Network

Ordnance Survey MasterMap Water Network entries within 500m of the study site

This watercourse information is provided by Ordnance Survey MasterMap Water Network. The data provides a detailed centre line following the curve of the waterway precisely, so all distances provided in the report should be understood as measurements to the centreline rather than a measurement to the nearest point of the watercourse. Underground watercourses are inferred from entry and exit points so caution is advised in using these to indicate precise locations of underground watercourses when planning site investigation and development.

The following Ordnance Survey MasterMap Water Network records are represented on the Hydrology Map (6e):

ID	Distance/ Direction	Name	Type of Watercourse	Additional Details
1	1 SE	-	Inland river not influenced by normal tidal action.	Catchment Area: Aire and Calder Relationship to Ground Level: On ground surface Permanence: Watercourse contains water year round (in normal conditions) Average Width in Watercourse Section (m): Not Provided
25	1 SE	-	Inland river not influenced by normal tidal action.	Catchment Area: Aire and Calder Relationship to Ground Level: On ground surface Permanence: Watercourse contains water year round (in normal conditions) Average Width in Watercourse Section (m): Not Provided
2	69 NW	-	Inland river not influenced by normal tidal action.	Catchment Area: Aire and Calder Relationship to Ground Level: Not provided Permanence: Watercourse contains water year round (in normal conditions) Average Width in Watercourse Section (m): Not Provided
3	69 NW	-	Inland river not influenced by normal tidal action.	Catchment Area: Aire and Calder Relationship to Ground Level: On ground surface Permanence: Watercourse contains water year round (in normal conditions) Average Width in Watercourse Section (m): Not Provided
4	69 NW	-	Inland river not influenced by normal tidal action.	Catchment Area: Aire and Calder Relationship to Ground Level: Not provided Permanence: Watercourse contains water year round (in normal conditions) Average Width in Watercourse Section (m): Not Provided
26	69 NW	-	Inland river not influenced by normal tidal action.	Catchment Area: Aire and Calder Relationship to Ground Level: Not provided Permanence: Watercourse contains water year round (in normal conditions) Average Width in Watercourse Section (m): Not Provided
27	69 NW	-	Inland river not influenced by normal tidal action.	Catchment Area: Aire and Calder Relationship to Ground Level: On ground surface Permanence: Watercourse contains water year round (in normal conditions) Average Width in Watercourse Section (m): Not Provided
28	69 NW	-	Inland river not influenced by normal tidal action.	Catchment Area: Aire and Calder Relationship to Ground Level: Not provided Permanence: Watercourse contains water year round (in normal conditions) Average Width in Watercourse Section (m): Not Provided
5	82 NW	-	Inland river not influenced by normal tidal action.	Catchment Area: Aire and Calder Relationship to Ground Level: On ground surface Permanence: Watercourse contains water year round (in normal conditions) Average Width in Watercourse Section (m): 1.2
29	82 NW	-	Inland river not influenced by normal tidal action.	Catchment Area: Aire and Calder Relationship to Ground Level: On ground surface Permanence: Watercourse contains water year round (in normal conditions) Average Width in Watercourse Section (m): 1.2
6	87 SE	-	Inland river not influenced by normal tidal action.	Catchment Area: Aire and Calder Relationship to Ground Level: Not provided Permanence: Watercourse contains water year round (in normal conditions) Average Width in Watercourse Section (m): Not Provided
30	87 SE	-	Inland river not influenced by normal tidal action.	Catchment Area: Aire and Calder Relationship to Ground Level: Not provided Permanence: Watercourse contains water year round (in normal conditions)

ID	Distance/ Direction	Name	Type of Watercourse	Additional Details
				Average Width in Watercourse Section (m): Not Provided
7	127 W	-	Inland river not influenced by normal tidal action.	Catchment Area: Aire and Calder Relationship to Ground Level: On ground surface Permanence: Watercourse contains water year round (in normal conditions) Average Width in Watercourse Section (m): Not Provided
31	127 W	-	Inland river not influenced by normal tidal action.	Catchment Area: Aire and Calder Relationship to Ground Level: On ground surface Permanence: Watercourse contains water year round (in normal conditions) Average Width in Watercourse Section (m): Not Provided
8	142 NE	-	Inland river not influenced by normal tidal action.	Catchment Area: Aire and Calder Relationship to Ground Level: Not provided Permanence: Watercourse contains water year round (in normal conditions) Average Width in Watercourse Section (m): Not Provided
32	142 NE	-	Inland river not influenced by normal tidal action.	Catchment Area: Aire and Calder Relationship to Ground Level: Not provided Permanence: Watercourse contains water year round (in normal conditions) Average Width in Watercourse Section (m): Not Provided
9	176 S	-	Inland river not influenced by normal tidal action.	Catchment Area: Aire and Calder Relationship to Ground Level: On ground surface Permanence: Watercourse contains water year round (in normal conditions) Average Width in Watercourse Section (m): Not Provided
33	176 S	-	Inland river not influenced by normal tidal action.	Catchment Area: Aire and Calder Relationship to Ground Level: On ground surface Permanence: Watercourse contains water year round (in normal conditions) Average Width in Watercourse Section (m): Not Provided
10	190 W	-	Inland river not influenced by normal tidal action.	Catchment Area: Aire and Calder Relationship to Ground Level: Not provided Permanence: Watercourse contains water year round (in normal conditions) Average Width in Watercourse Section (m): Not Provided
34	190 W	-	Inland river not influenced by normal tidal action.	Catchment Area: Aire and Calder Relationship to Ground Level: Not provided Permanence: Watercourse contains water year round (in normal conditions) Average Width in Watercourse Section (m): Not Provided
11	203 NE	-	Inland river not influenced by normal tidal action.	Catchment Area: Aire and Calder Relationship to Ground Level: On ground surface Permanence: Watercourse contains water year round (in normal conditions) Average Width in Watercourse Section (m): Not Provided
35	203 NE	-	Inland river not influenced by normal tidal action.	Catchment Area: Aire and Calder Relationship to Ground Level: On ground surface Permanence: Watercourse contains water year round (in normal conditions) Average Width in Watercourse Section (m): Not Provided
12	217 S	-	Inland river not influenced by normal tidal action.	Catchment Area: Aire and Calder Relationship to Ground Level: On ground surface Permanence: Watercourse contains water year round (in normal conditions) Average Width in Watercourse Section (m): Not Provided
36	217 S	-	Inland river not influenced by normal tidal action.	Catchment Area: Aire and Calder Relationship to Ground Level: On ground surface Permanence: Watercourse contains water year round (in normal conditions) Average Width in Watercourse Section (m): Not Provided

ID	Distance/ Direction	Name	Type of Watercourse	Additional Details
13	239 N	-	Inland river not influenced by normal tidal action.	Catchment Area: Aire and Calder Relationship to Ground Level: On ground surface Permanence: Watercourse contains water year round (in normal conditions) Average Width in Watercourse Section (m): Not Provided
37	239 N	-	Inland river not influenced by normal tidal action.	Catchment Area: Aire and Calder Relationship to Ground Level: On ground surface Permanence: Watercourse contains water year round (in normal conditions) Average Width in Watercourse Section (m): Not Provided
14	255 W	-	Inland river not influenced by normal tidal action.	Catchment Area: Aire and Calder Relationship to Ground Level: On ground surface Permanence: Watercourse contains water year round (in normal conditions) Average Width in Watercourse Section (m): 1.6
38	255 W	-	Inland river not influenced by normal tidal action.	Catchment Area: Aire and Calder Relationship to Ground Level: On ground surface Permanence: Watercourse contains water year round (in normal conditions) Average Width in Watercourse Section (m): 1.6
15	287 NE	-	Inland river not influenced by normal tidal action.	Catchment Area: Aire and Calder Relationship to Ground Level: On ground surface Permanence: Watercourse contains water year round (in normal conditions) Average Width in Watercourse Section (m): Not Provided
39	287 NE	-	Inland river not influenced by normal tidal action.	Catchment Area: Aire and Calder Relationship to Ground Level: On ground surface Permanence: Watercourse contains water year round (in normal conditions) Average Width in Watercourse Section (m): Not Provided
16	298 S	-	Inland river not influenced by normal tidal action.	Catchment Area: Aire and Calder Relationship to Ground Level: Underground Permanence: Watercourse contains water year round (in normal conditions) Average Width in Watercourse Section (m): Not Provided
Not shown	298 S	-	Inland river not influenced by normal tidal action.	Catchment Area: Aire and Calder Relationship to Ground Level: Underground Permanence: Watercourse contains water year round (in normal conditions) Average Width in Watercourse Section (m): Not Provided
17	308 S	-	Lake, loch or reservoir.	Catchment Area: Aire and Calder Relationship to Ground Level: On ground surface Permanence: Watercourse contains water year round (in normal conditions) Average Width in Watercourse Section (m): 14.3
Not shown	308 S	-	Lake, loch or reservoir.	Catchment Area: Aire and Calder Relationship to Ground Level: On ground surface Permanence: Watercourse contains water year round (in normal conditions) Average Width in Watercourse Section (m): 14.3
18	336 S	-	Lake, loch or reservoir.	Catchment Area: Aire and Calder Relationship to Ground Level: On ground surface Permanence: Watercourse contains water year round (in normal conditions) Average Width in Watercourse Section (m): 8.0
19	336 S	-	Lake, loch or reservoir.	Catchment Area: Aire and Calder Relationship to Ground Level: On ground surface Permanence: Watercourse contains water year round (in normal conditions) Average Width in Watercourse Section (m): 3.2
Not shown	336	-	Lake, loch or reservoir.	Catchment Area: Aire and Calder Relationship to Ground Level: On ground surface

ID	Distance/ Direction	Name	Type of Watercourse	Additional Details
	S			Permanence: Watercourse contains water year round (in normal conditions) Average Width in Watercourse Section (m): 8.0
Not shown	336 S	-	Lake, loch or reservoir.	Catchment Area: Aire and Calder Relationship to Ground Level: On ground surface Permanence: Watercourse contains water year round (in normal conditions) Average Width in Watercourse Section (m): 3.2
20	342 S	-	Inland river not influenced by normal tidal action.	Catchment Area: Aire and Calder Relationship to Ground Level: On ground surface Permanence: Watercourse contains water year round (in normal conditions) Average Width in Watercourse Section (m): Not Provided
Not shown	342 S	-	Inland river not influenced by normal tidal action.	Catchment Area: Aire and Calder Relationship to Ground Level: On ground surface Permanence: Watercourse contains water year round (in normal conditions) Average Width in Watercourse Section (m): Not Provided
21	347 S	-	Inland river not influenced by normal tidal action.	Catchment Area: Aire and Calder Relationship to Ground Level: On ground surface Permanence: Watercourse contains water year round (in normal conditions) Average Width in Watercourse Section (m): Not Provided
22	347 S	-	Inland river not influenced by normal tidal action.	Catchment Area: Aire and Calder Relationship to Ground Level: Not provided Permanence: Watercourse contains water year round (in normal conditions) Average Width in Watercourse Section (m): Not Provided
Not shown	347 S	-	Inland river not influenced by normal tidal action.	Catchment Area: Aire and Calder Relationship to Ground Level: On ground surface Permanence: Watercourse contains water year round (in normal conditions) Average Width in Watercourse Section (m): Not Provided
Not shown	347 S	-	Inland river not influenced by normal tidal action.	Catchment Area: Aire and Calder Relationship to Ground Level: Not provided Permanence: Watercourse contains water year round (in normal conditions) Average Width in Watercourse Section (m): Not Provided
23	353 W	-	Inland river not influenced by normal tidal action.	Catchment Area: Aire and Calder Relationship to Ground Level: On ground surface Permanence: Watercourse contains water year round (in normal conditions) Average Width in Watercourse Section (m): Not Provided
47	353 W	-	Inland river not influenced by normal tidal action.	Catchment Area: Aire and Calder Relationship to Ground Level: On ground surface Permanence: Watercourse contains water year round (in normal conditions) Average Width in Watercourse Section (m): Not Provided
24	359 SW	-	Inland river not influenced by normal tidal action.	Catchment Area: Aire and Calder Relationship to Ground Level: On ground surface Permanence: Watercourse contains water year round (in normal conditions) Average Width in Watercourse Section (m): Not Provided
Not shown	359 SW	-	Inland river not influenced by normal tidal action.	Catchment Area: Aire and Calder Relationship to Ground Level: On ground surface Permanence: Watercourse contains water year round (in normal conditions) Average Width in Watercourse Section (m): Not Provided
25	397 S	-	Inland river not influenced by normal tidal action.	Catchment Area: Aire and Calder Relationship to Ground Level: On ground surface Permanence: Watercourse contains water year round (in normal conditions)

ID	Distance/ Direction	Name	Type of Watercourse	Additional Details
				Average Width in Watercourse Section (m): Not Provided
Not shown	397 S	-	Inland river not influenced by normal tidal action.	Catchment Area: Aire and Calder Relationship to Ground Level: On ground surface Permanence: Watercourse contains water year round (in normal conditions) Average Width in Watercourse Section (m): Not Provided
26	436 SW	-	Inland river not influenced by normal tidal action.	Catchment Area: Aire and Calder Relationship to Ground Level: Not provided Permanence: Watercourse contains water year round (in normal conditions) Average Width in Watercourse Section (m): Not Provided
Not shown	436 SW	-	Inland river not influenced by normal tidal action.	Catchment Area: Aire and Calder Relationship to Ground Level: Not provided Permanence: Watercourse contains water year round (in normal conditions) Average Width in Watercourse Section (m): Not Provided
27	444 SE	-	Inland river not influenced by normal tidal action.	Catchment Area: Aire and Calder Relationship to Ground Level: On ground surface Permanence: Watercourse contains water year round (in normal conditions) Average Width in Watercourse Section (m): Not Provided
Not shown	444 SE	-	Inland river not influenced by normal tidal action.	Catchment Area: Aire and Calder Relationship to Ground Level: On ground surface Permanence: Watercourse contains water year round (in normal conditions) Average Width in Watercourse Section (m): Not Provided
28	447 SE	-	Inland river not influenced by normal tidal action.	Catchment Area: Aire and Calder Relationship to Ground Level: On ground surface Permanence: Watercourse contains water year round (in normal conditions) Average Width in Watercourse Section (m): Not Provided
52	447 SE	-	Inland river not influenced by normal tidal action.	Catchment Area: Aire and Calder Relationship to Ground Level: On ground surface Permanence: Watercourse contains water year round (in normal conditions) Average Width in Watercourse Section (m): Not Provided
29	451 SE	-	Inland river not influenced by normal tidal action.	Catchment Area: Aire and Calder Relationship to Ground Level: On ground surface Permanence: Watercourse contains water year round (in normal conditions) Average Width in Watercourse Section (m): Not Provided
Not shown	451 SE	-	Inland river not influenced by normal tidal action.	Catchment Area: Aire and Calder Relationship to Ground Level: On ground surface Permanence: Watercourse contains water year round (in normal conditions) Average Width in Watercourse Section (m): Not Provided
30	453 SE	-	Inland river not influenced by normal tidal action.	Catchment Area: Aire and Calder Relationship to Ground Level: On ground surface Permanence: Watercourse contains water year round (in normal conditions) Average Width in Watercourse Section (m): Not Provided
Not shown	453 SE	-	Inland river not influenced by normal tidal action.	Catchment Area: Aire and Calder Relationship to Ground Level: On ground surface Permanence: Watercourse contains water year round (in normal conditions) Average Width in Watercourse Section (m): Not Provided
31	468 NE	-	Inland river not influenced by normal tidal action.	Catchment Area: Aire and Calder Relationship to Ground Level: Not provided Permanence: Watercourse contains water year round (in normal conditions) Average Width in Watercourse Section (m): Not Provided

ID	Distance/ Direction	Name	Type of Watercourse	Additional Details
Not shown	468 NE	-	Inland river not influenced by normal tidal action.	Catchment Area: Aire and Calder Relationship to Ground Level: Not provided Permanence: Watercourse contains water year round (in normal conditions) Average Width in Watercourse Section (m): Not Provided
32	472 SE	-	Inland river not influenced by normal tidal action.	Catchment Area: Aire and Calder Relationship to Ground Level: Not provided Permanence: Watercourse contains water year round (in normal conditions) Average Width in Watercourse Section (m): Not Provided
Not shown	472 SE	-	Inland river not influenced by normal tidal action.	Catchment Area: Aire and Calder Relationship to Ground Level: Not provided Permanence: Watercourse contains water year round (in normal conditions) Average Width in Watercourse Section (m): Not Provided
33	479 S	-	Inland river not influenced by normal tidal action.	Catchment Area: Aire and Calder Relationship to Ground Level: On ground surface Permanence: Watercourse contains water year round (in normal conditions) Average Width in Watercourse Section (m): Not Provided
Not shown	479 S	-	Inland river not influenced by normal tidal action.	Catchment Area: Aire and Calder Relationship to Ground Level: On ground surface Permanence: Watercourse contains water year round (in normal conditions) Average Width in Watercourse Section (m): Not Provided
34	480 SE	-	Inland river not influenced by normal tidal action.	Catchment Area: Aire and Calder Relationship to Ground Level: On ground surface Permanence: Watercourse contains water year round (in normal conditions) Average Width in Watercourse Section (m): Not Provided
Not shown	480 SE	-	Inland river not influenced by normal tidal action.	Catchment Area: Aire and Calder Relationship to Ground Level: On ground surface Permanence: Watercourse contains water year round (in normal conditions) Average Width in Watercourse Section (m): Not Provided
35	489 E	-	Inland river not influenced by normal tidal action.	Catchment Area: Aire and Calder Relationship to Ground Level: On ground surface Permanence: Watercourse contains water year round (in normal conditions) Average Width in Watercourse Section (m): Not Provided
36	489 E	-	Inland river not influenced by normal tidal action.	Catchment Area: Aire and Calder Relationship to Ground Level: On ground surface Permanence: Watercourse contains water year round (in normal conditions) Average Width in Watercourse Section (m): Not Provided
Not shown	489 E	-	Inland river not influenced by normal tidal action.	Catchment Area: Aire and Calder Relationship to Ground Level: On ground surface Permanence: Watercourse contains water year round (in normal conditions) Average Width in Watercourse Section (m): Not Provided
Not shown	489 E	-	Inland river not influenced by normal tidal action.	Catchment Area: Aire and Calder Relationship to Ground Level: On ground surface Permanence: Watercourse contains water year round (in normal conditions) Average Width in Watercourse Section (m): Not Provided
37	490 SW	-	Inland river not influenced by normal tidal action.	Catchment Area: Aire and Calder Relationship to Ground Level: On ground surface Permanence: Watercourse contains water year round (in normal conditions) Average Width in Watercourse Section (m): Not Provided
Not shown	490	-	Inland river not influenced by normal tidal action.	Catchment Area: Aire and Calder Relationship to Ground Level: On ground surface

ID	Distance/ Direction	Name	Type of Watercourse	Additional Details
	SW			Permanence: Watercourse contains water year round (in normal conditions) Average Width in Watercourse Section (m): Not Provided
38	491 SW	-	Inland river not influenced by normal tidal action.	Catchment Area: Aire and Calder Relationship to Ground Level: On ground surface Permanence: Watercourse contains water year round (in normal conditions) Average Width in Watercourse Section (m): 1.2
Not shown	491 SW	-	Inland river not influenced by normal tidal action.	Catchment Area: Aire and Calder Relationship to Ground Level: On ground surface Permanence: Watercourse contains water year round (in normal conditions) Average Width in Watercourse Section (m): 1.2

6.11 Surface Water Features


Surface water features within 250m of the study site

Identified

The following surface water records are not represented on mapping:

Distance (m)	Direction
1	SE
87	SE
104	W
157	W
176	S
203	NE
239	N


7a. Environment Agency/Natural Resources Wales Flood Map for Planning (from rivers and the sea)

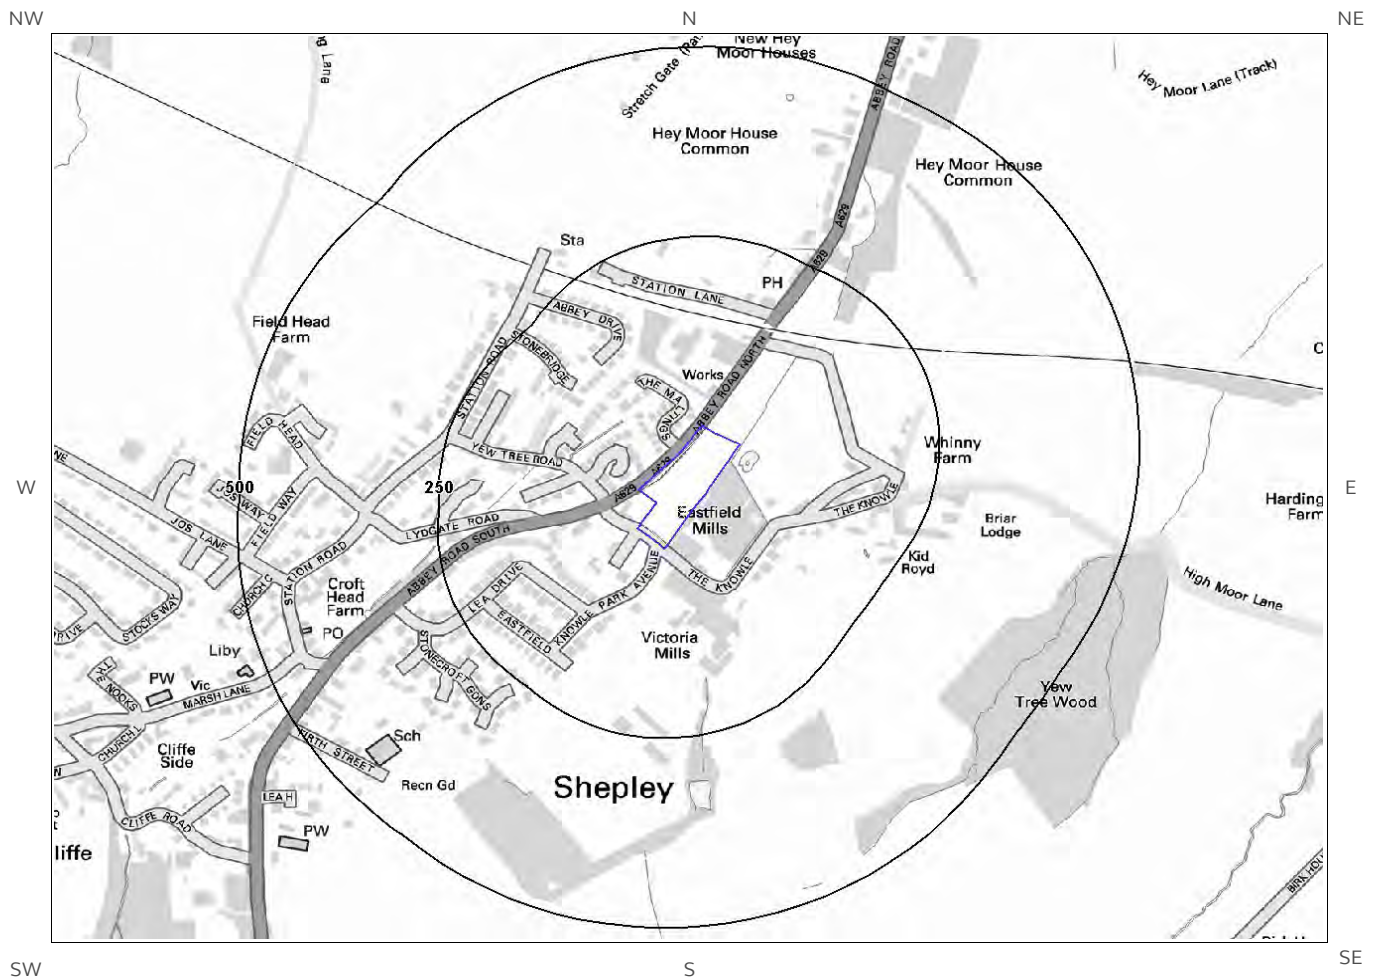


© Crown copyright and database rights 2019.
Ordnance Survey licence 100035207.



7b. Environment Agency/Natural Resources Wales Risk of Flooding from Rivers and the Sea (RoFRaS) Map

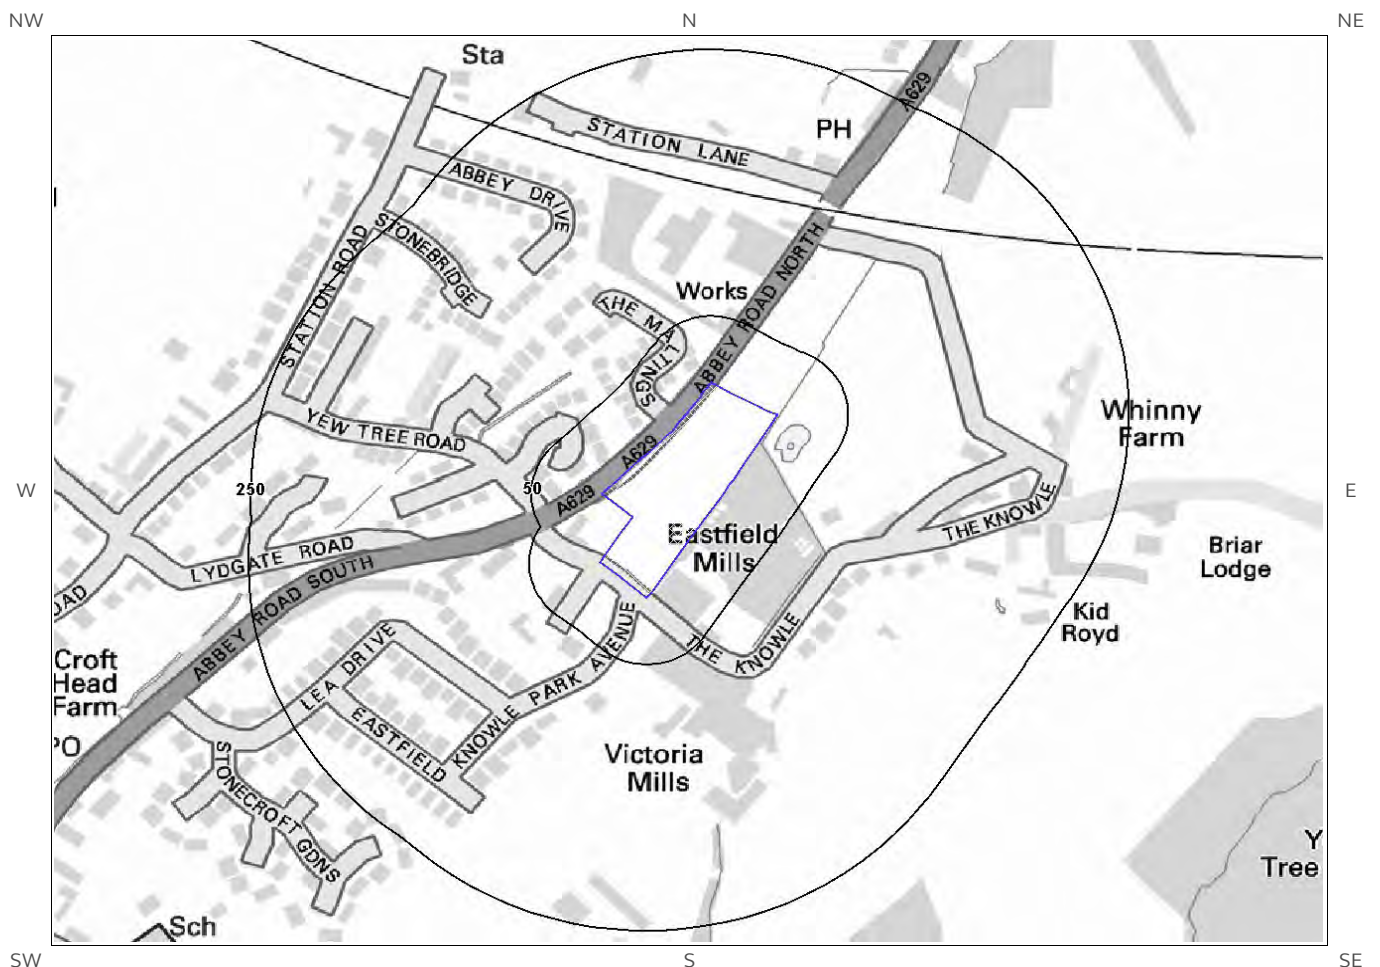

© Crown copyright and database rights 2019.
Ordnance Survey licence 100035207.

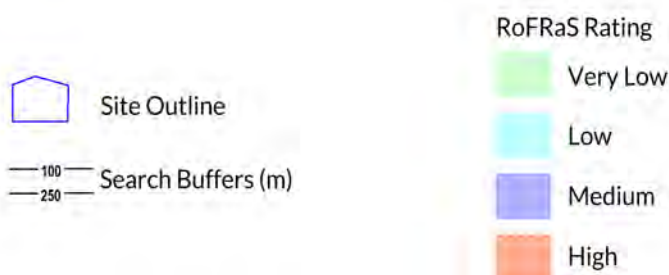

7 Flooding

7.1 River and Coastal Zone 2 Flooding

Environment Agency/Natural Resources Wales Zone 2 floodplain within 250m None identified

Environment Agency/Natural Resources Wales Zone 2 floodplains estimate the annual probability of flooding as between 1 in 1000 (0.1%) and 1 in 100 (1%) from rivers and between 1 in 1000 (0.1%) and 1 in 200 (0.5%) from the sea. Any relevant data is represented on Map 7a – Flood Map for Planning:

Database searched and no data found.

7.2 River and Coastal Zone 3 Flooding

Environment Agency/Natural Resources Wales Zone 3 floodplain within 250m None identified

Zone 3 shows the extent of a river flood with a 1 in 100 (1%) or greater chance of occurring in any year or a sea flood with a 1 in 200 (0.5%) or greater chance of occurring in any year. Any relevant data is represented on Map 7a – Flood Map for Planning.

Database searched and no data found.

7.3 Risk of Flooding from Rivers and the Sea (RoFRaS) Flood Rating

Highest risk of flooding onsite Very Low

The Environment Agency/Natural Resources Wales RoFRaS database provides an indication of river and coastal flood risk at a national level on a 50m grid with the flood rating at the centre of the grid calculated and given above. The data considers the probability that the flood defences will overtop or breach by considering their location, type, condition and standard of protection.

RoFRaS data for the study site indicates the property is in an area with a Very Low (less than 1 in 1000) chance of flooding in any given year.

7.4 Flood Defences

Flood Defences within 250m of the study site None identified
Database searched and no data found.

7.5 Areas benefiting from Flood Defences

Areas benefiting from Flood Defences within 250m of the study site None identified

7.6 Areas benefiting from Flood Storage

Areas used for Flood Storage within 250m of the study site

None identified

7.7 Groundwater Flooding Susceptibility Areas

7.7.1 British Geological Survey groundwater flooding susceptibility areas within 50m of the boundary of the study site

Identified

Clearwater Flooding or Superficial Deposits Flooding

Clearwater Flooding

Notes: Groundwater flooding may either be associated with shallow unconsolidated sedimentary aquifers which overlie unproductive aquifers (Superficial Deposits Flooding), or with unconfined aquifers (Clearwater Flooding).

7.7.2 Highest susceptibility to groundwater flooding in the search area based on the underlying geological conditions

Limited potential

Where limited potential for groundwater flooding to occur is indicated, this means that although given the geological conditions there may be a groundwater flooding hazard, unless other relevant information, e.g. records of previous flooding, suggests groundwater flooding has occurred before in this area, you need take no further action in relation to groundwater flooding hazard.

7.8 Groundwater Flooding Confidence Areas


British Geological Survey confidence rating in this result

Low


Notes: Groundwater flooding is defined as the emergence of groundwater at the ground surface or the rising of groundwater into man-made ground under conditions where the normal range of groundwater levels is exceeded.

The confidence rating is on a threefold scale - Low, Moderate and High. This provides a relative indication of the BGS confidence in the accuracy of the susceptibility result for groundwater flooding. This is based on the amount and precision of the information used in the assessment. In areas with a relatively lower level of confidence the susceptibility result should be treated with more caution. In other areas with higher levels of confidence the susceptibility result can be used with more confidence.

8. Designated Environmentally Sensitive Sites Map

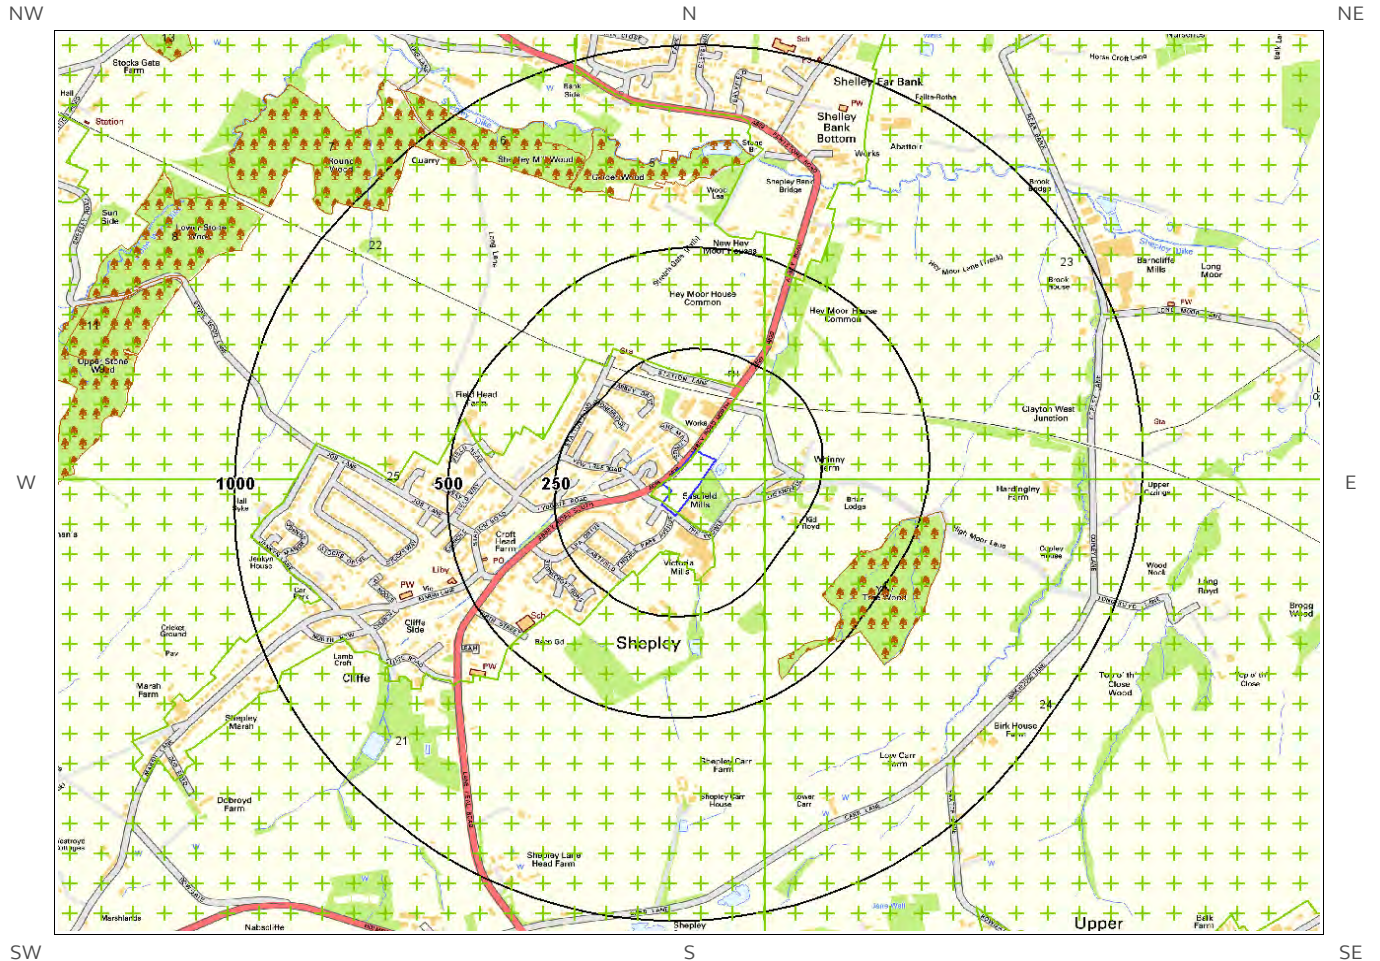

© Crown copyright and database rights 2019.
Ordnance Survey licence 100035207.

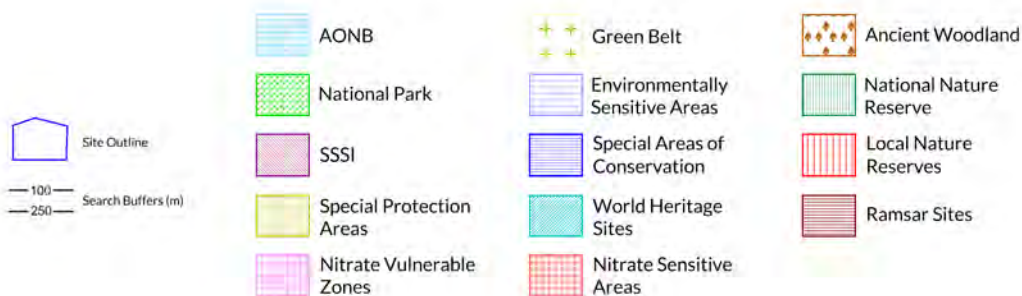

8. Designated Environmentally Sensitive Sites

Designated Environmentally Sensitive Sites within 2000m of the study site	Identified
---	------------

8.1 Records of Sites of Special Scientific Interest (SSSI) within 2000m of the study site:

0

Database searched and no data found.

8.2 Records of National Nature Reserves (NNR) within 2000m of the study site:

0

Database searched and no data found.

8.3 Records of Special Areas of Conservation (SAC) within 2000m of the study site:

0

Database searched and no data found.

8.4 Records of Special Protection Areas (SPA) within 2000m of the study site:

0

Database searched and no data found.

8.5 Records of Ramsar sites within 2000m of the study site:

0

Database searched and no data found.

8.6 Records of Ancient Woodland within 2000m of the study site:

17

The following records of Designated Ancient Woodland provided by Natural England/Natural Resources Wales are represented as polygons on the Designated Environmentally Sensitive Sites Map:

ID	Distance (m)	Direction	Ancient Woodland Name	Data Source
4	392	SE	YEW TREE WOOD	Ancient Replanted Woodland
5	635	N	SHEPLEY MILL WOOD	Ancient and Semi-Natural Woodland
6	711	NW	SHEPLEY MILL WOOD	Ancient and Semi-Natural Woodland
7	887	NW	SHEPLEY MILL WOOD	Ancient and Semi-Natural Woodland
8	1142	NW	SHEPLEY MILL WOOD	Ancient and Semi-Natural Woodland
9	1226	NW	SHEPLEY MILL WOOD	Ancient and Semi-Natural Woodland
Not shown	1255	NW	HARTLEY BANK WOOD	Ancient Replanted Woodland
11	1340	W	SHEPLEY MILL WOOD	Ancient Replanted Woodland
Not shown	1405	N	SHELLEY WOOD	Ancient and Semi-Natural Woodland
13	1537	NW	BIRKS WOOD	Ancient Replanted Woodland
Not shown	1645	NW	BIRKS WOOD	Ancient and Semi-Natural Woodland
Not shown	1743	N	SHELLEY WOOD	Ancient Replanted Woodland
Not shown	1753	W	WOOD END WOOD\	Ancient Replanted Woodland
Not shown	1771	N	SHELLEY WOOD	Ancient and Semi-Natural Woodland
Not shown	1771	NW	HARTLEY BANK WOOD	Ancient Replanted Woodland
Not shown	1845	SE	NEW HOUSE, GREEN AND BURN WOODS	Ancient Replanted Woodland
Not shown	1978	NW	HARTLEY BANK WOOD	Ancient Replanted Woodland

8.7 Records of Local Nature Reserves (LNR) within 2000m of the study site:

0

Database searched and no data found.

8.8 Records of World Heritage Sites within 2000m of the study site:

0

Database searched and no data found.

8.9 Records of Environmentally Sensitive Areas within 2000m of the study site:

0

Database searched and no data found.

8.10 Records of Areas of Outstanding Natural Beauty (AONB) within 2000m of the study site:

0

Database searched and no data found.

8.11 Records of National Parks (NP) within 2000m of the study site:

0

Database searched and no data found.

8.12 Records of Nitrate Sensitive Areas within 2000m of the study site:

0

Database searched and no data found.

8.13 Records of Nitrate Vulnerable Zones within 2000m of the study site:

3

The following Nitrate Vulnerable Zone records produced by DEFRA are represented as polygons on the Designated Environmentally Sensitive Sites Map:

ID	Distance (m)	Direction	NVZ Name	Data Source
Not shown	1311	S	Existing	DEFRA
Not shown	1361	S	Existing	DEFRA
Not shown	1591	NE	Existing	DEFRA

8.14 Records of Green Belt land within 2000m of the study site:

5

Green Belt data contains Ordnance Survey data © Crown copyright and database right [2015].

ID	Distance	Direction	Green Belt Name	Local Authority Name
21	0	On Site	Liverpool, Manchester and West Yorks Greenbelt	Kirklees District (B)
22	0	On Site	Liverpool, Manchester and West Yorks Greenbelt	Kirklees District (B)
23	115	E	Liverpool, Manchester and West Yorks Greenbelt	Kirklees District (B)
24	124	SE	Liverpool, Manchester and West Yorks Greenbelt	Kirklees District (B)
25	623	W	Liverpool, Manchester and West Yorks Greenbelt	Kirklees District (B)

9. Natural Hazards Findings

9.1 Detailed BGS GeoSure Data

BGS GeoSure Data has been searched to 50m. The data is included in tabular format. If you require further information on geology and ground stability, please obtain a **Groundsure Geo Insight**, available from our **website**. The following information has been found:

9.1.1 Shrink Swell

Maximum Shrink-Swell** hazard rating identified on the study site Very Low

The following natural subsidence information provided by the British Geological Survey is not represented on mapping:

Hazard
Ground conditions predominantly low plasticity. No special actions required to avoid problems due to shrink-swell clays. No special ground investigation required, and increased construction costs or increased financial risks are unlikely due to potential problems with shrink-swell clays.

9.1.2 Landslides

Maximum Landslide* hazard rating identified on the study site Very Low

The following natural subsidence information provided by the British Geological Survey is not represented on mapping:

Hazard
Slope instability problems are unlikely to be present. No special actions required to avoid problems due to landslides. No special ground investigation required, and increased construction costs or increased financial risks are unlikely due to potential problems with landslides.

9.1.3 Soluble Rocks

Maximum Soluble Rocks* hazard rating identified on the study site Negligible

The following natural subsidence information provided by the British Geological Survey is not represented on mapping:

Hazard
Soluble rocks are present, but unlikely to cause problems except under exceptional conditions. No special actions required to avoid problems due to soluble rocks. No special ground investigation required, and increased construction costs or increased financial risks are unlikely due to potential problems with soluble rocks.

* This indicates an automatically generated 50m buffer and site.

9.1.4 Compressible Ground

Maximum Compressible Ground* hazard rating identified on the study site

Negligible

The following natural subsidence information provided by the British Geological Survey is not represented on mapping:

Hazard
No indicators for compressible deposits identified. No special actions required to avoid problems due to compressible deposits. No special ground investigation required, and increased construction costs or increased financial risks are unlikely due to potential problems with compressible deposits.

9.1.5 Collapsible Rocks

Maximum Collapsible Rocks* hazard rating identified on the study site

Very Low

The following natural subsidence information provided by the British Geological Survey is not represented on mapping:

Hazard
Deposits with potential to collapse when loaded and saturated are unlikely to be present. No special ground investigation required or increased construction costs or increased financial risk due to potential problems with collapsible deposits.

9.1.6 Running Sand

Maximum Running Sand** hazard rating identified on the study site

Negligible

The following natural subsidence information provided by the British Geological Survey is not represented on mapping:

Hazard
No indicators for running sand identified. No special actions required to avoid problems due to running sand. No special ground investigation required, and increased construction costs or increased financial risks are unlikely due to potential problems with running sand.

* This indicates an automatically generated 50m buffer and site.

9.2 Radon

9.2.1 Radon Affected Areas

Is the property in a Radon Affected Area as defined by the Health Protection Agency (HPA) and if so what percentage of homes are above the Action Level? The site is not in a Radon Affected Area, as less than 1% of properties are above the Action Level.

The radon data in this report is supplied by the BGS/Public Health England and is the definitive map of Radon Affected Areas in Great Britain and Northern Ireland. The dataset was created using long-term radon measurements in over 479,000 homes across Great Britain and 23,000 homes across Northern Ireland, combined with geological data. The dataset is considered accurate to 50m to allow for the margin of error in geological lines, and the findings of this report supercede any answer given in the less accurate Indicative Atlas of Radon in Great Britain, which simplifies the data to give the highest risk within any given 1km grid square. As such, the radon atlas is considered indicative, whereas the data given in this report is considered definitive.

9.2.2 Radon Protection

Is the property in an area where Radon Protection are required for new properties or extensions to existing ones as described in publication BR211 by the Building Research Establishment? No radon protective measures are necessary.

10. Mining

10.1 Coal Mining

Coal mining areas within 75m of the study site

Identified

The following coal mining information provided by the Coal Authority is not represented on Mapping:

Distance (m)	Direction	Details
0	On Site	The site lies in or in proximity to the coal mining reporting area as defined by the Coal Authority

10.2 Non-Coal Mining

Non-Coal Mining areas within 50m of the study site boundary

None identified

Database searched and no data found.

10.3 Brine Affected Areas

Brine affected areas within 75m of the study site

None identified

Guidance: No Guidance Required.

Contact Details

Groundsure Helpline
Telephone: 08444 159 000
info@groundsure.com

British Geological Survey Enquiries

Kingsley Dunham Centre
Keyworth, Nottingham NG12 5GG
Tel: 0115 936 3143.
Fax: 0115 936 3276.
Email:

Web: www.bgs.ac.uk

BGS Geological Hazards Reports and general geological enquiries:
enquiries@bgs.ac.uk

Environment Agency

National Customer Contact Centre, PO Box 544
Rotherham, S60 1BY
Tel: 03708 506 506

Web: www.environment-agency.gov.uk

Email: enquiries@environment-agency.gov.uk

Public Health England

Public information access office
Public Health England, Wellington House
133-155 Waterloo Road, London, SE1 8UG
www.gov.uk/phe

Email: enquiries@phe.gov.uk
Main switchboard: 020 7654 8000

The Coal Authority

200 Lichfield Lane
Mansfield
Notts NG18 4RG
Tel: 0345 7626 848
DX 716176 Mansfield 5
www.coal.gov.uk

Ordnance Survey

Adanac Drive, Southampton
SO16 0AS
Tel: 08456 050505

Local Authority

Authority: Kirklees Council
Phone: 01484 221 000
Web: <http://www.kirklees.gov.uk/>
Address: Civic Centre 3, Market Street, Huddersfield, HD1 2EY

Gemapping PLC

Virginia Villas, High Street, Hartley Witney,
Hampshire RG27 8NW
Tel: 01252 845444



Acknowledgements: Site of Special Scientific Interest, National Nature Reserve, Ramsar Site, Special Protection Area, Special Area of Conservation data is provided by, and used with the permission of, Natural England/Natural Resources Wales who retain the Copyright and Intellectual Property Rights for the data.

PointX © Database Right/Copyright, Thomson Directories Limited © Copyright Link Interchange Network Limited © Database Right/Copyright and Ordnance Survey © Crown Copyright and/or Database Right. All Rights Reserved. Licence Number [03421028].

This report has been prepared in accordance with the Groundsure Ltd standard Terms and Conditions of business for work of this nature.

Standard Terms and Conditions

Groundsure's Terms and Conditions can be viewed online at this link:

<https://www.groundsure.com/terms-and-conditions-feb11-2019>

Site Details:

419815, 410001

Client Ref: YORKSHIRE_COUNTRY_PROPERTIES_7465
Report Ref: GS-6047538
Grid Ref: 419822, 409992

Map Name: County Series

Map date: 1854

Scale: 1:10,560

Printed at: 1:10,560



Surveyed 1850
 Revised N/A
 Edition 1854
 Copyright N/A
 Levelled N/A

Surveyed 1850
 Revised N/A
 Edition 1854
 Copyright N/A
 Levelled N/A




Produced by
 Groundsure Insights
 T: 08444 159000
 E: info@groundsure.com
 W: www.groundsure.com

© Crown copyright and database rights 2018 Ordnance Survey 100035207

Production date: 22 May 2019

Map legend available at:
www.groundsure.com/sites/default/files/groundsure_legend.pdf

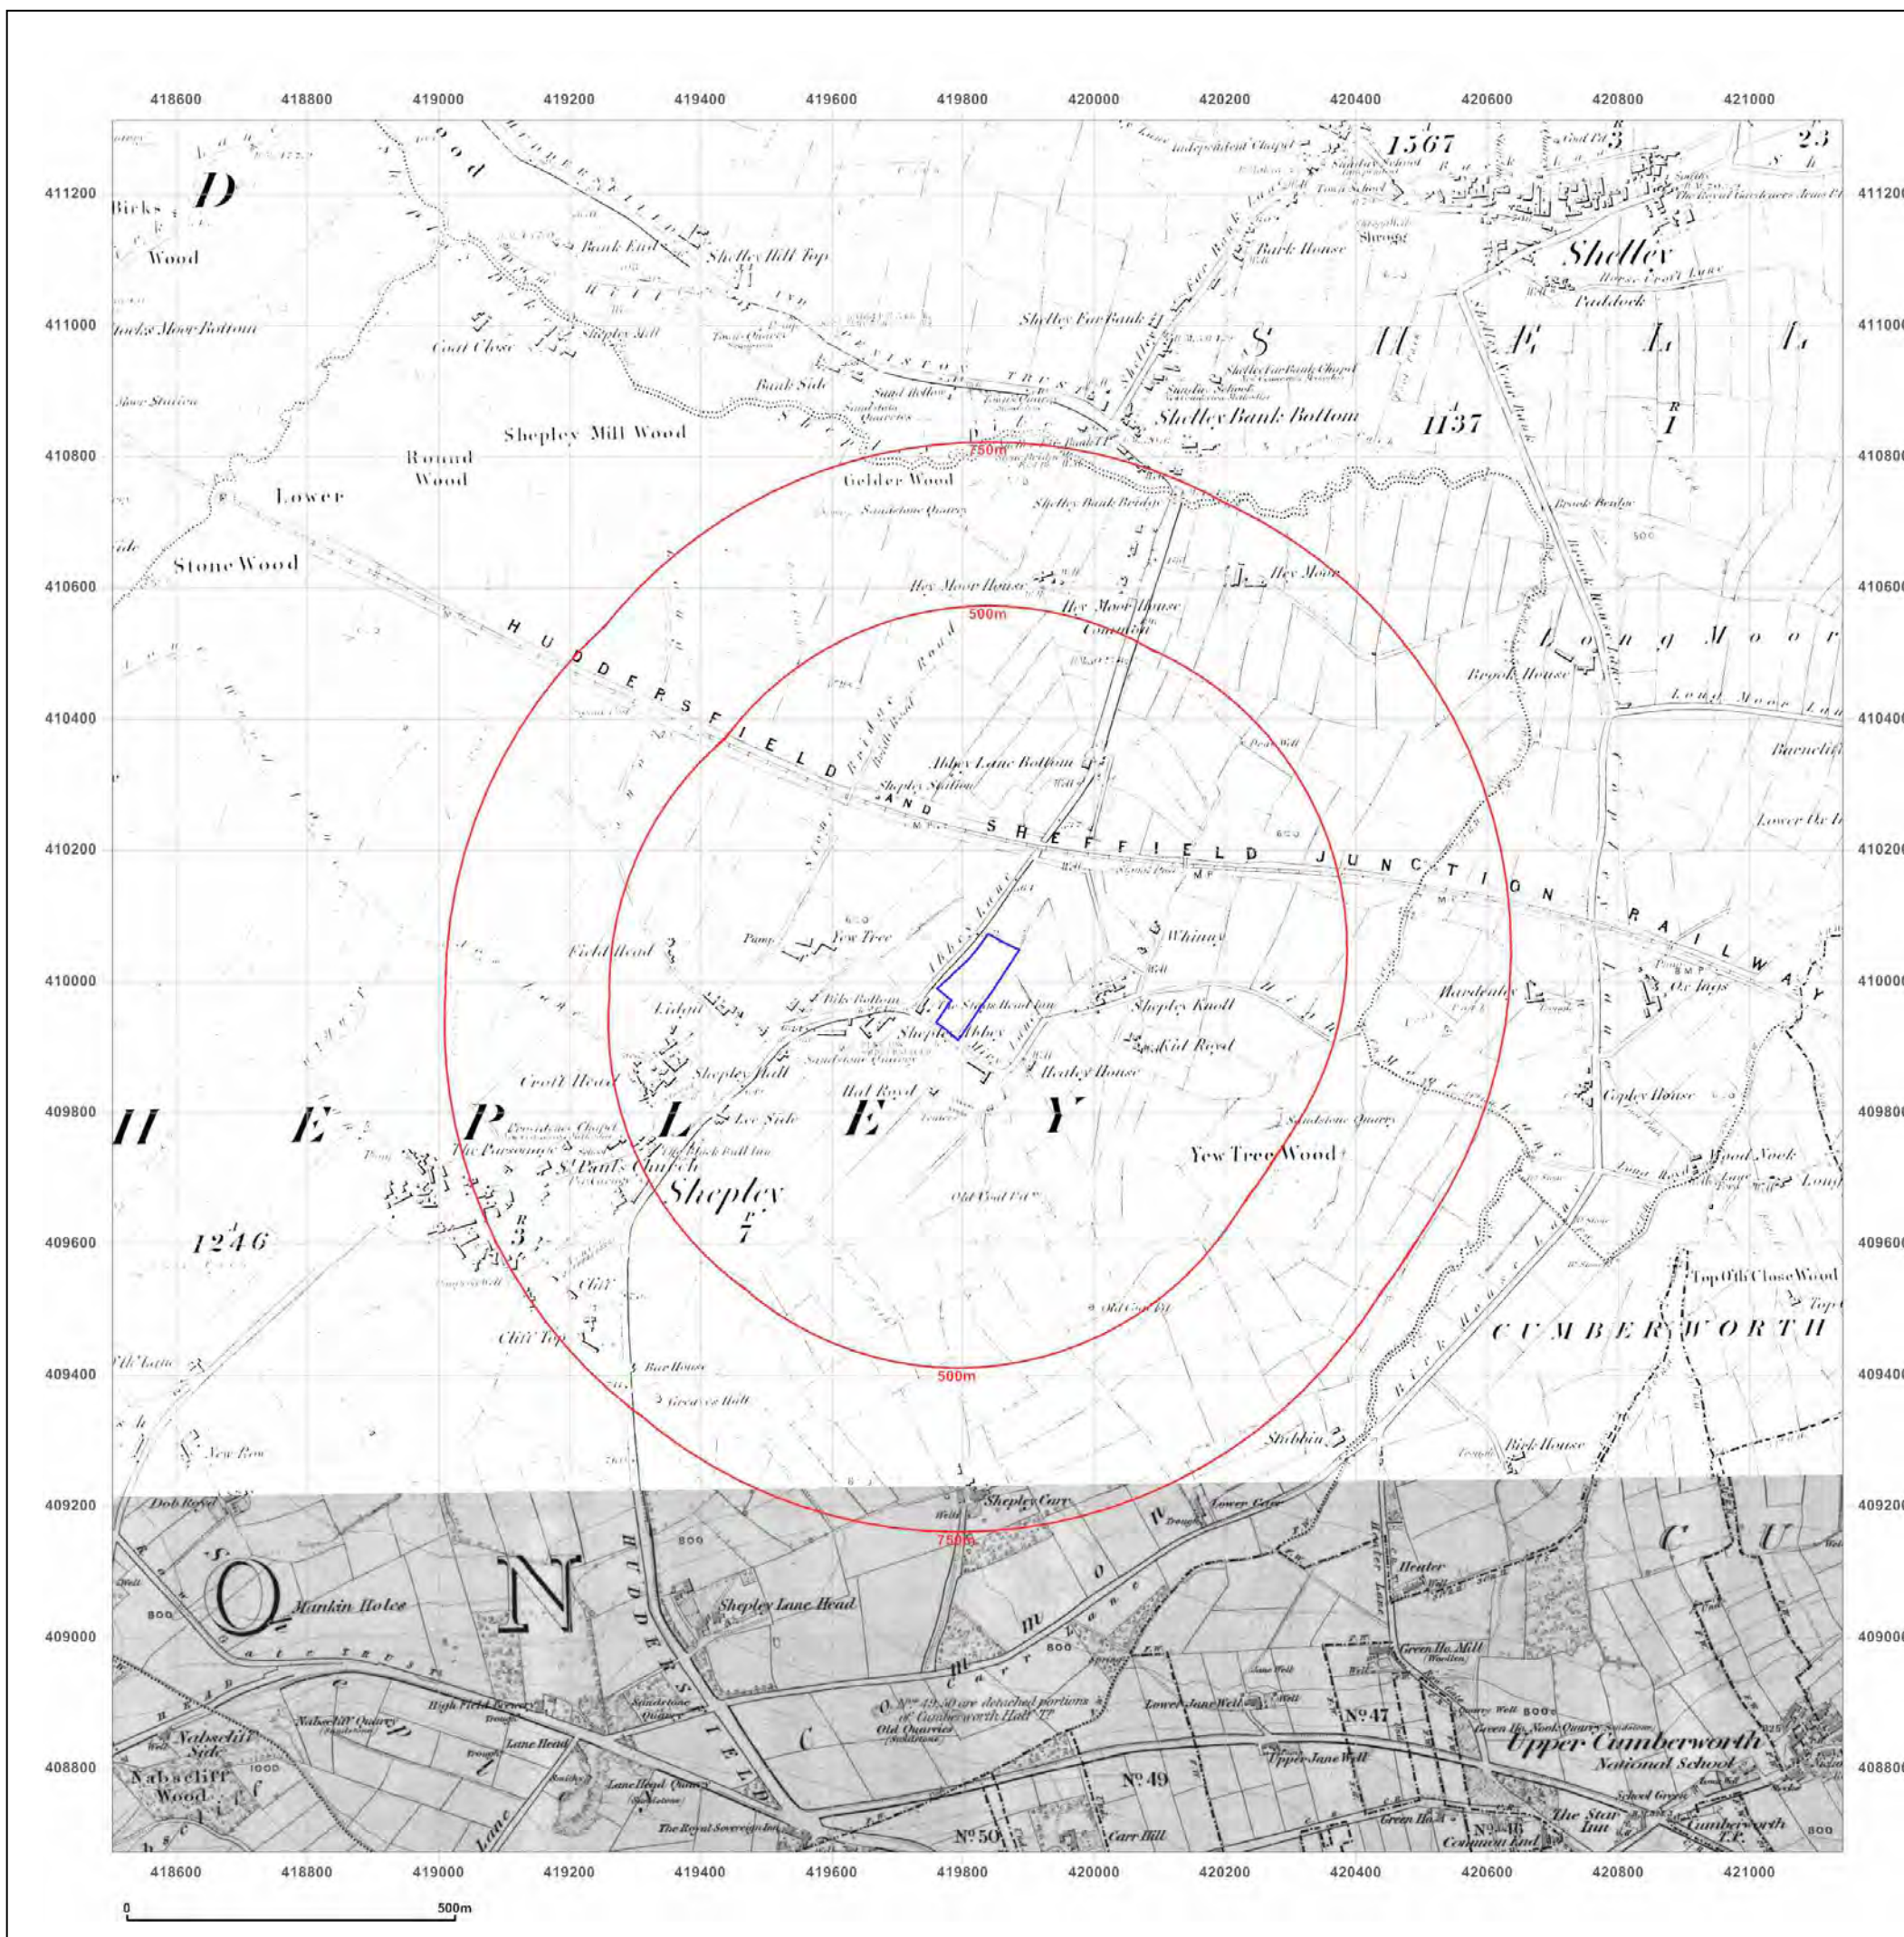

Site Details:

419815, 410001

Client Ref: YORKSHIRE_COUNTRY_PROPERTIES_7465
Report Ref: GS-6047538
Grid Ref: 419822, 409992

Map Name: County Series

Map date: 1891-1892

Scale: 1:10,560

Printed at: 1:10,560



Surveyed 1892
 Revised 1892
 Edition N/A
 Copyright N/A
 Levelled N/A

Surveyed 1891
 Revised 1891
 Edition N/A
 Copyright N/A
 Levelled N/A




Produced by
 Groundsure Insights
 T: 08444 159000
 E: info@groundsure.com
 W: www.groundsure.com

© Crown copyright and database rights 2018 Ordnance Survey 100035207

Production date: 22 May 2019

Map legend available at:
www.groundsure.com/sites/default/files/groundsure_legend.pdf

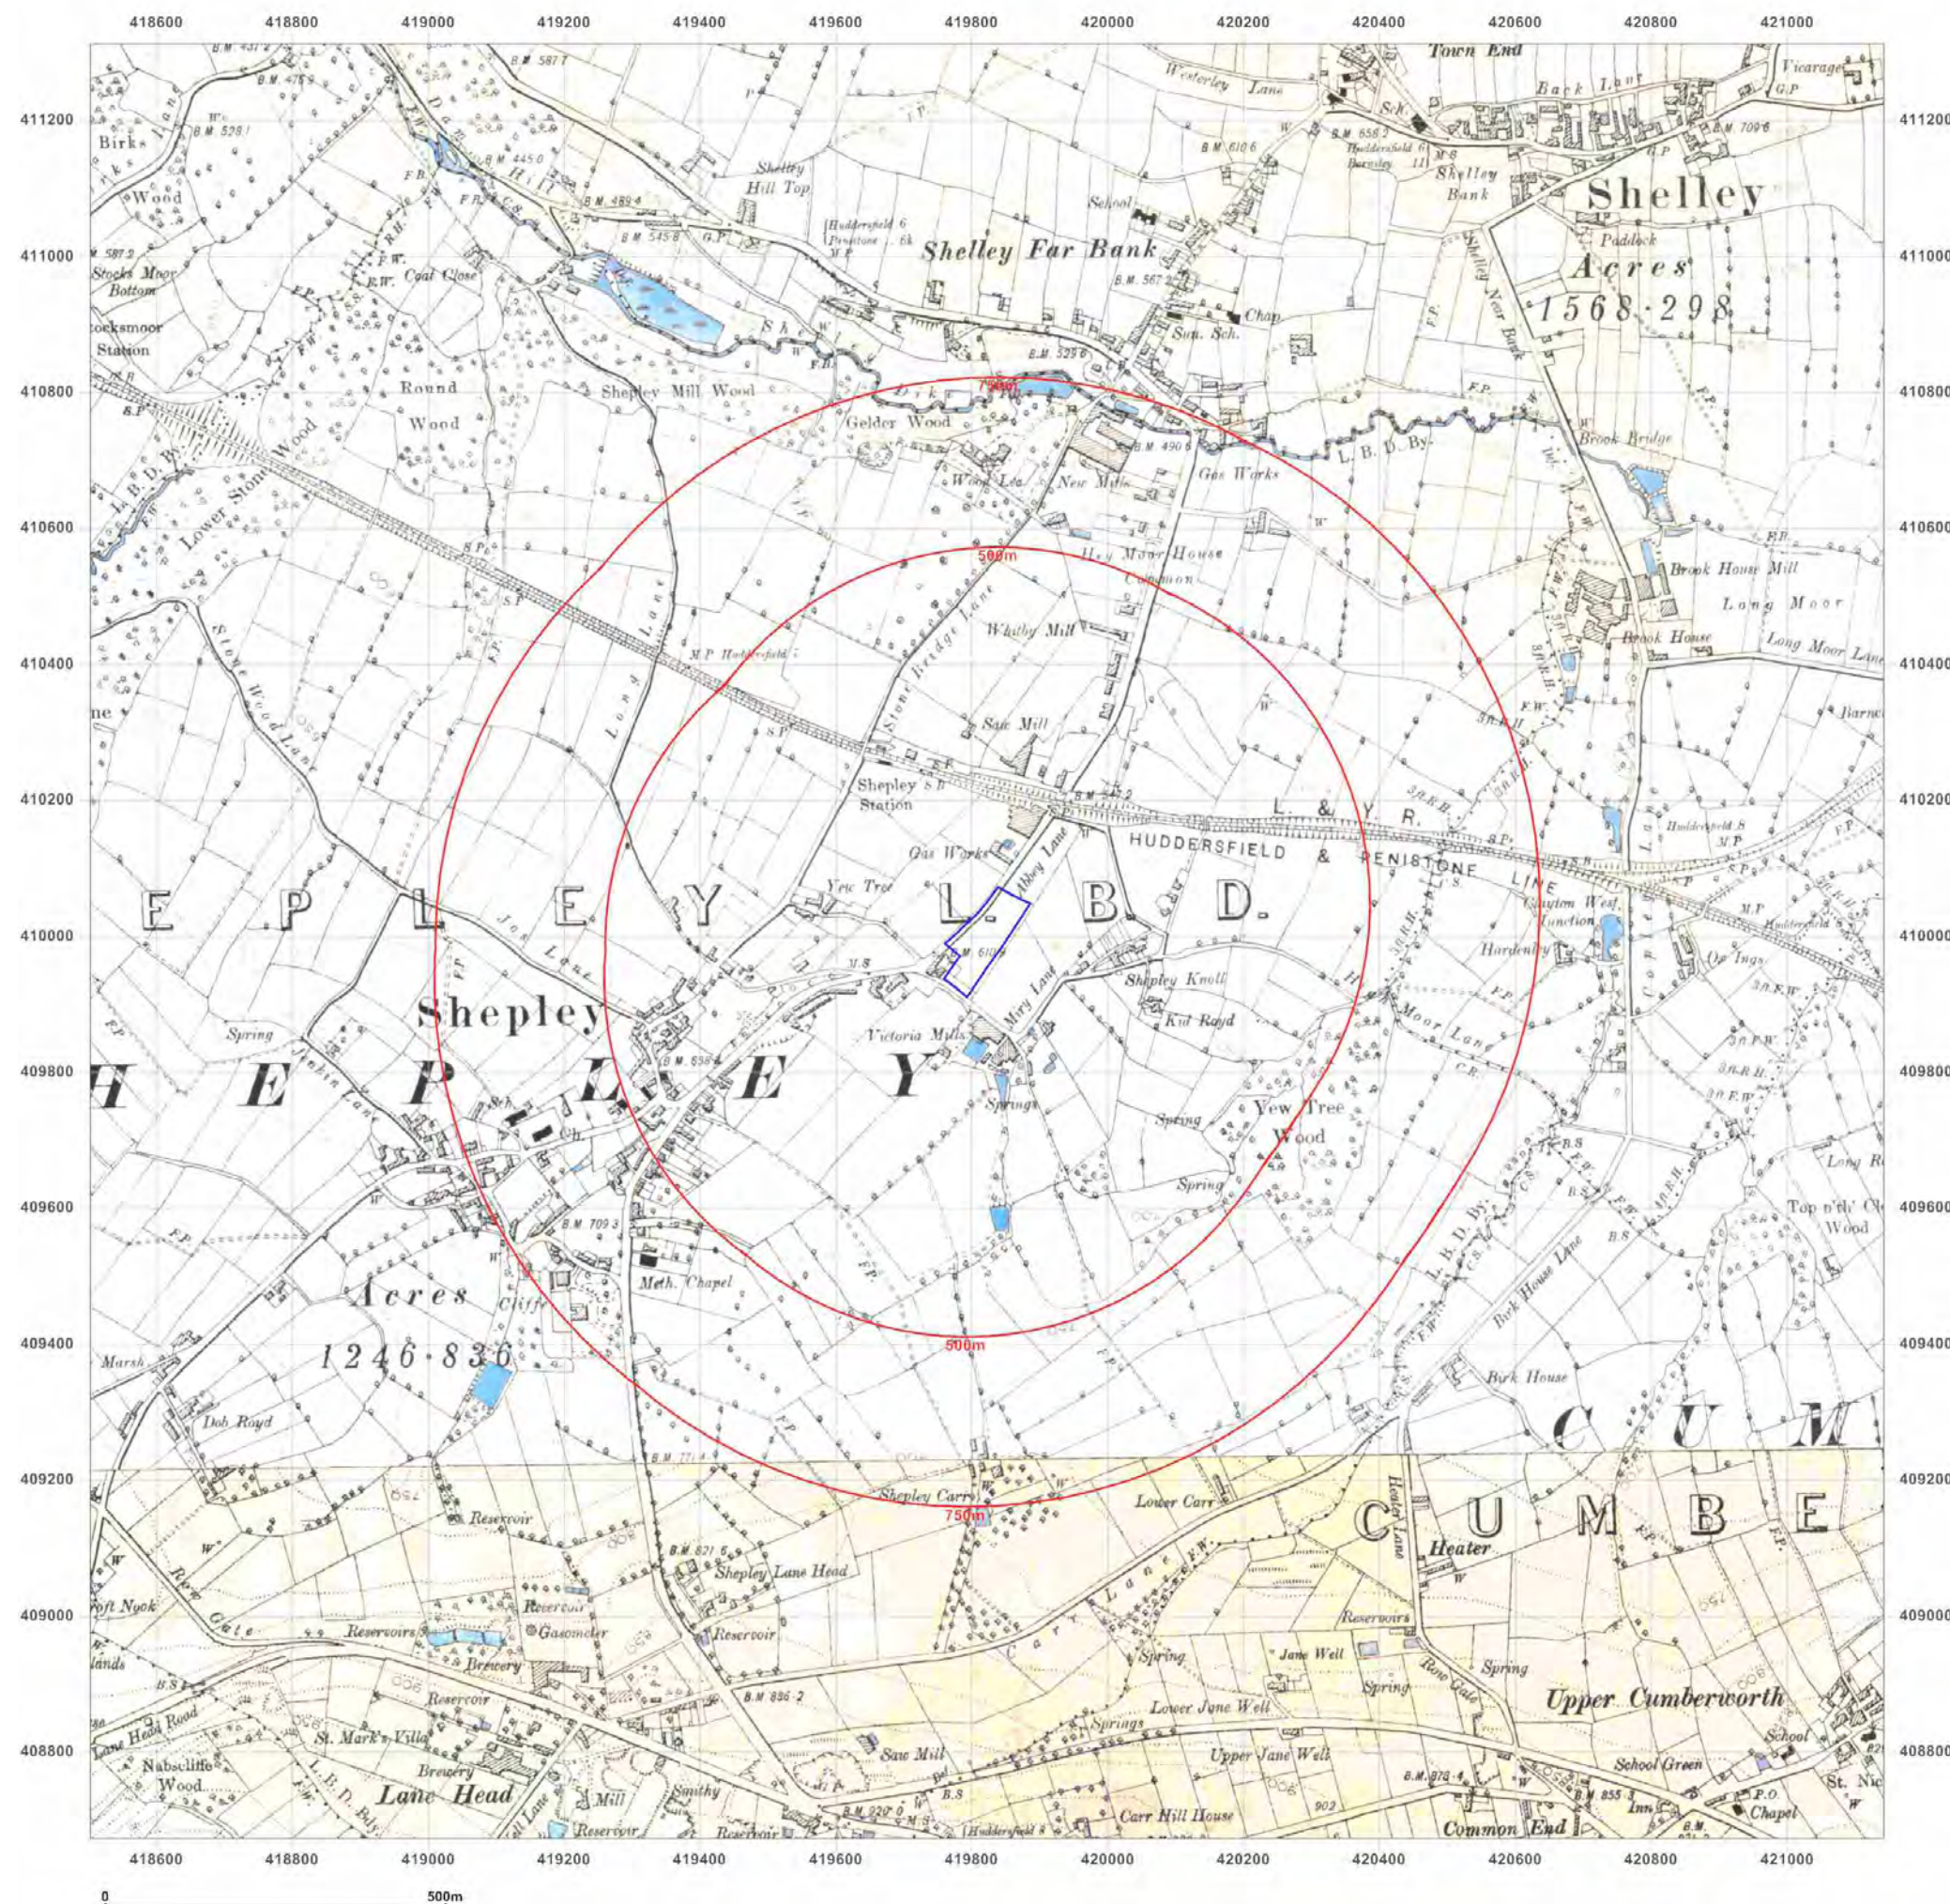

Site Details:

419815, 410001

Client Ref: YORKSHIRE_COUNTRY_PROPERTIES_7465
Report Ref: GS-6047538
Grid Ref: 419822, 409992

Map Name: County Series

Map date: 1903-1904

Scale: 1:10,560

Printed at: 1:10,560



Surveyed 1892
 Revised 1904
 Edition N/A
 Copyright N/A
 Levelled N/A

Surveyed 1891
 Revised 1903
 Edition N/A
 Copyright N/A
 Levelled N/A




Produced by
 Groundsure Insights
 T: 08444 159000
 E: info@groundsure.com
 W: www.groundsure.com

© Crown copyright and database rights 2018 Ordnance Survey 100035207

Production date: 22 May 2019

Map legend available at:
www.groundsure.com/sites/default/files/groundsure_legend.pdf

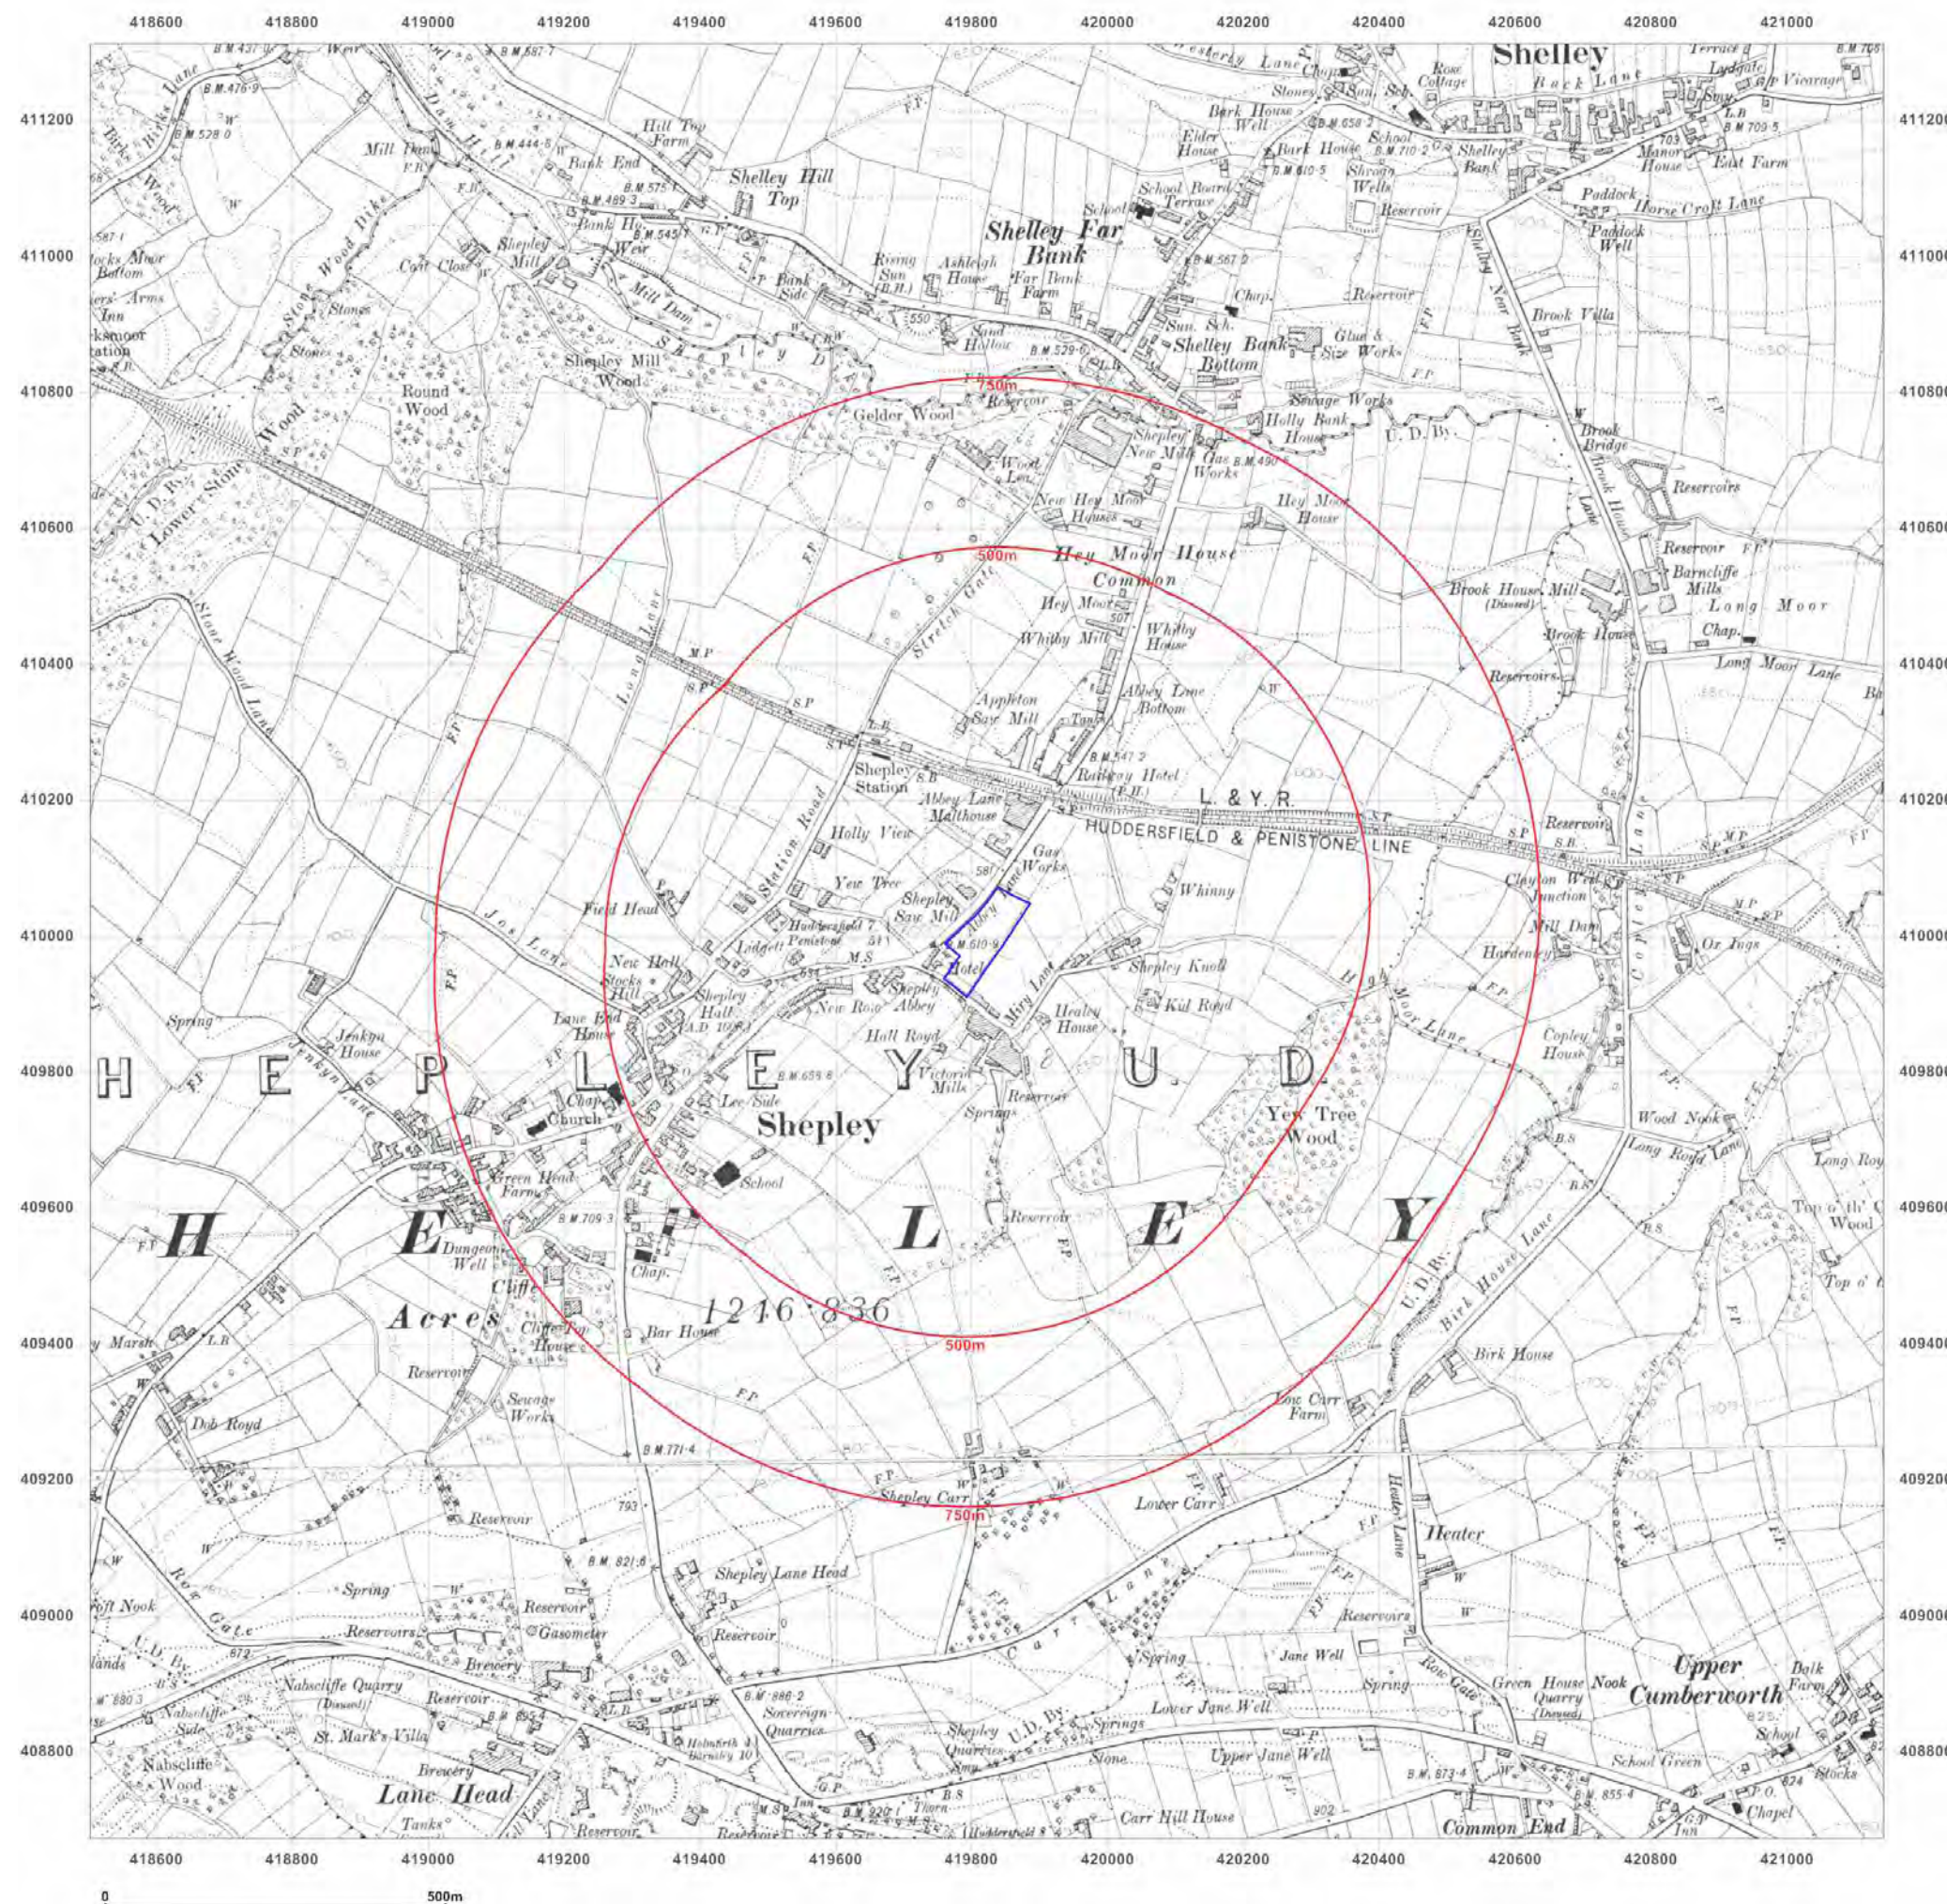

Site Details:

419815, 410001

Client Ref: YORKSHIRE_COUNTRY_PROPERTIES_7465
Report Ref: GS-6047538
Grid Ref: 419822, 409992

Map Name: County Series

Map date: 1932-1933

Scale: 1:10,560

Printed at: 1:10,560



Surveyed 1851
 Revised 1932
 Edition 1932
 Copyright N/A
 Levelled N/A

Surveyed 1851
 Revised 1933
 Edition 1933
 Copyright N/A
 Levelled N/A




Produced by
 Groundsure Insights
 T: 08444 159000
 E: info@groundsure.com
 W: www.groundsure.com

© Crown copyright and database rights 2018 Ordnance Survey 100035207

Production date: 22 May 2019

Map legend available at:
www.groundsure.com/sites/default/files/groundsure_legend.pdf

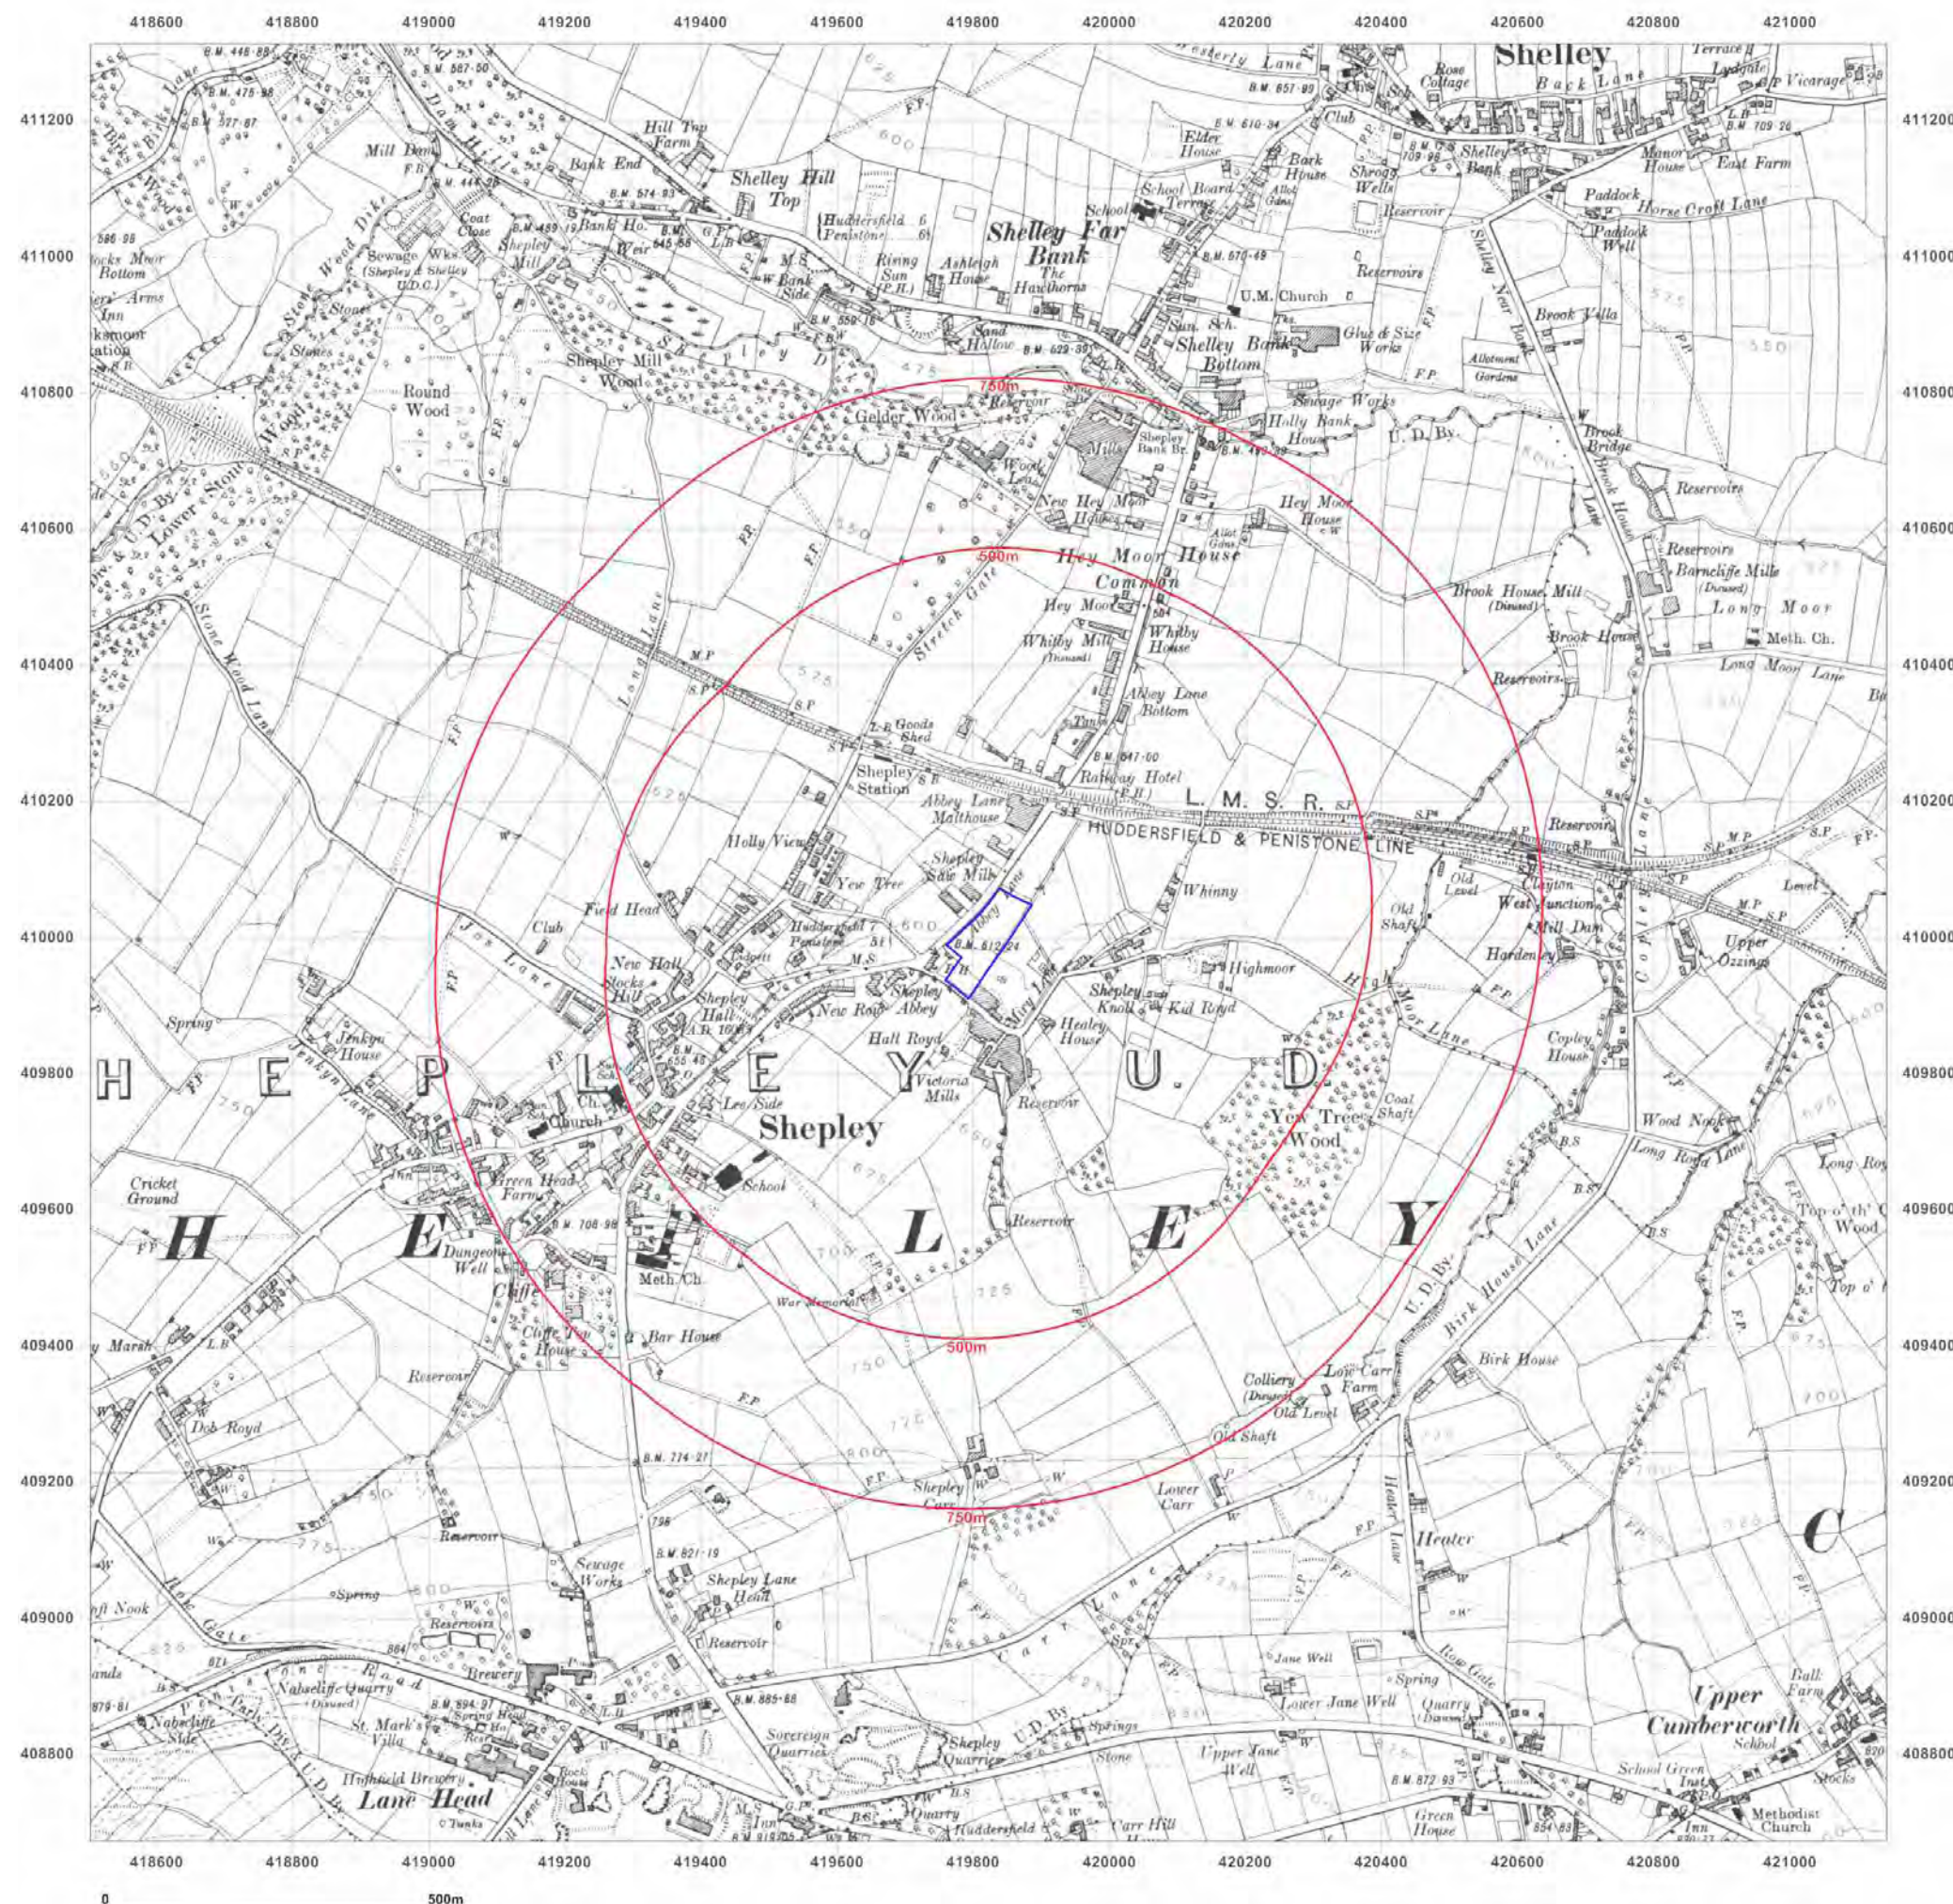

Site Details:

419815, 410001

Client Ref: YORKSHIRE_COUNTRY_PROPERTIES_7465
Report Ref: GS-6047538
Grid Ref: 419822, 409992

Map Name: County Series

Map date: 1948

Scale: 1:10,560

Printed at: 1:10,560



Surveyed 1851
 Revised 1948
 Edition N/A
 Copyright N/A
 Levelled N/A

Surveyed 1851
 Revised 1948
 Edition N/A
 Copyright N/A
 Levelled N/A




Produced by
 Groundsure Insights
 T: 08444 159000
 E: info@groundsure.com
 W: www.groundsure.com

© Crown copyright and database rights 2018 Ordnance Survey 100035207

Production date: 22 May 2019

Map legend available at:
www.groundsure.com/sites/default/files/groundsure_legend.pdf

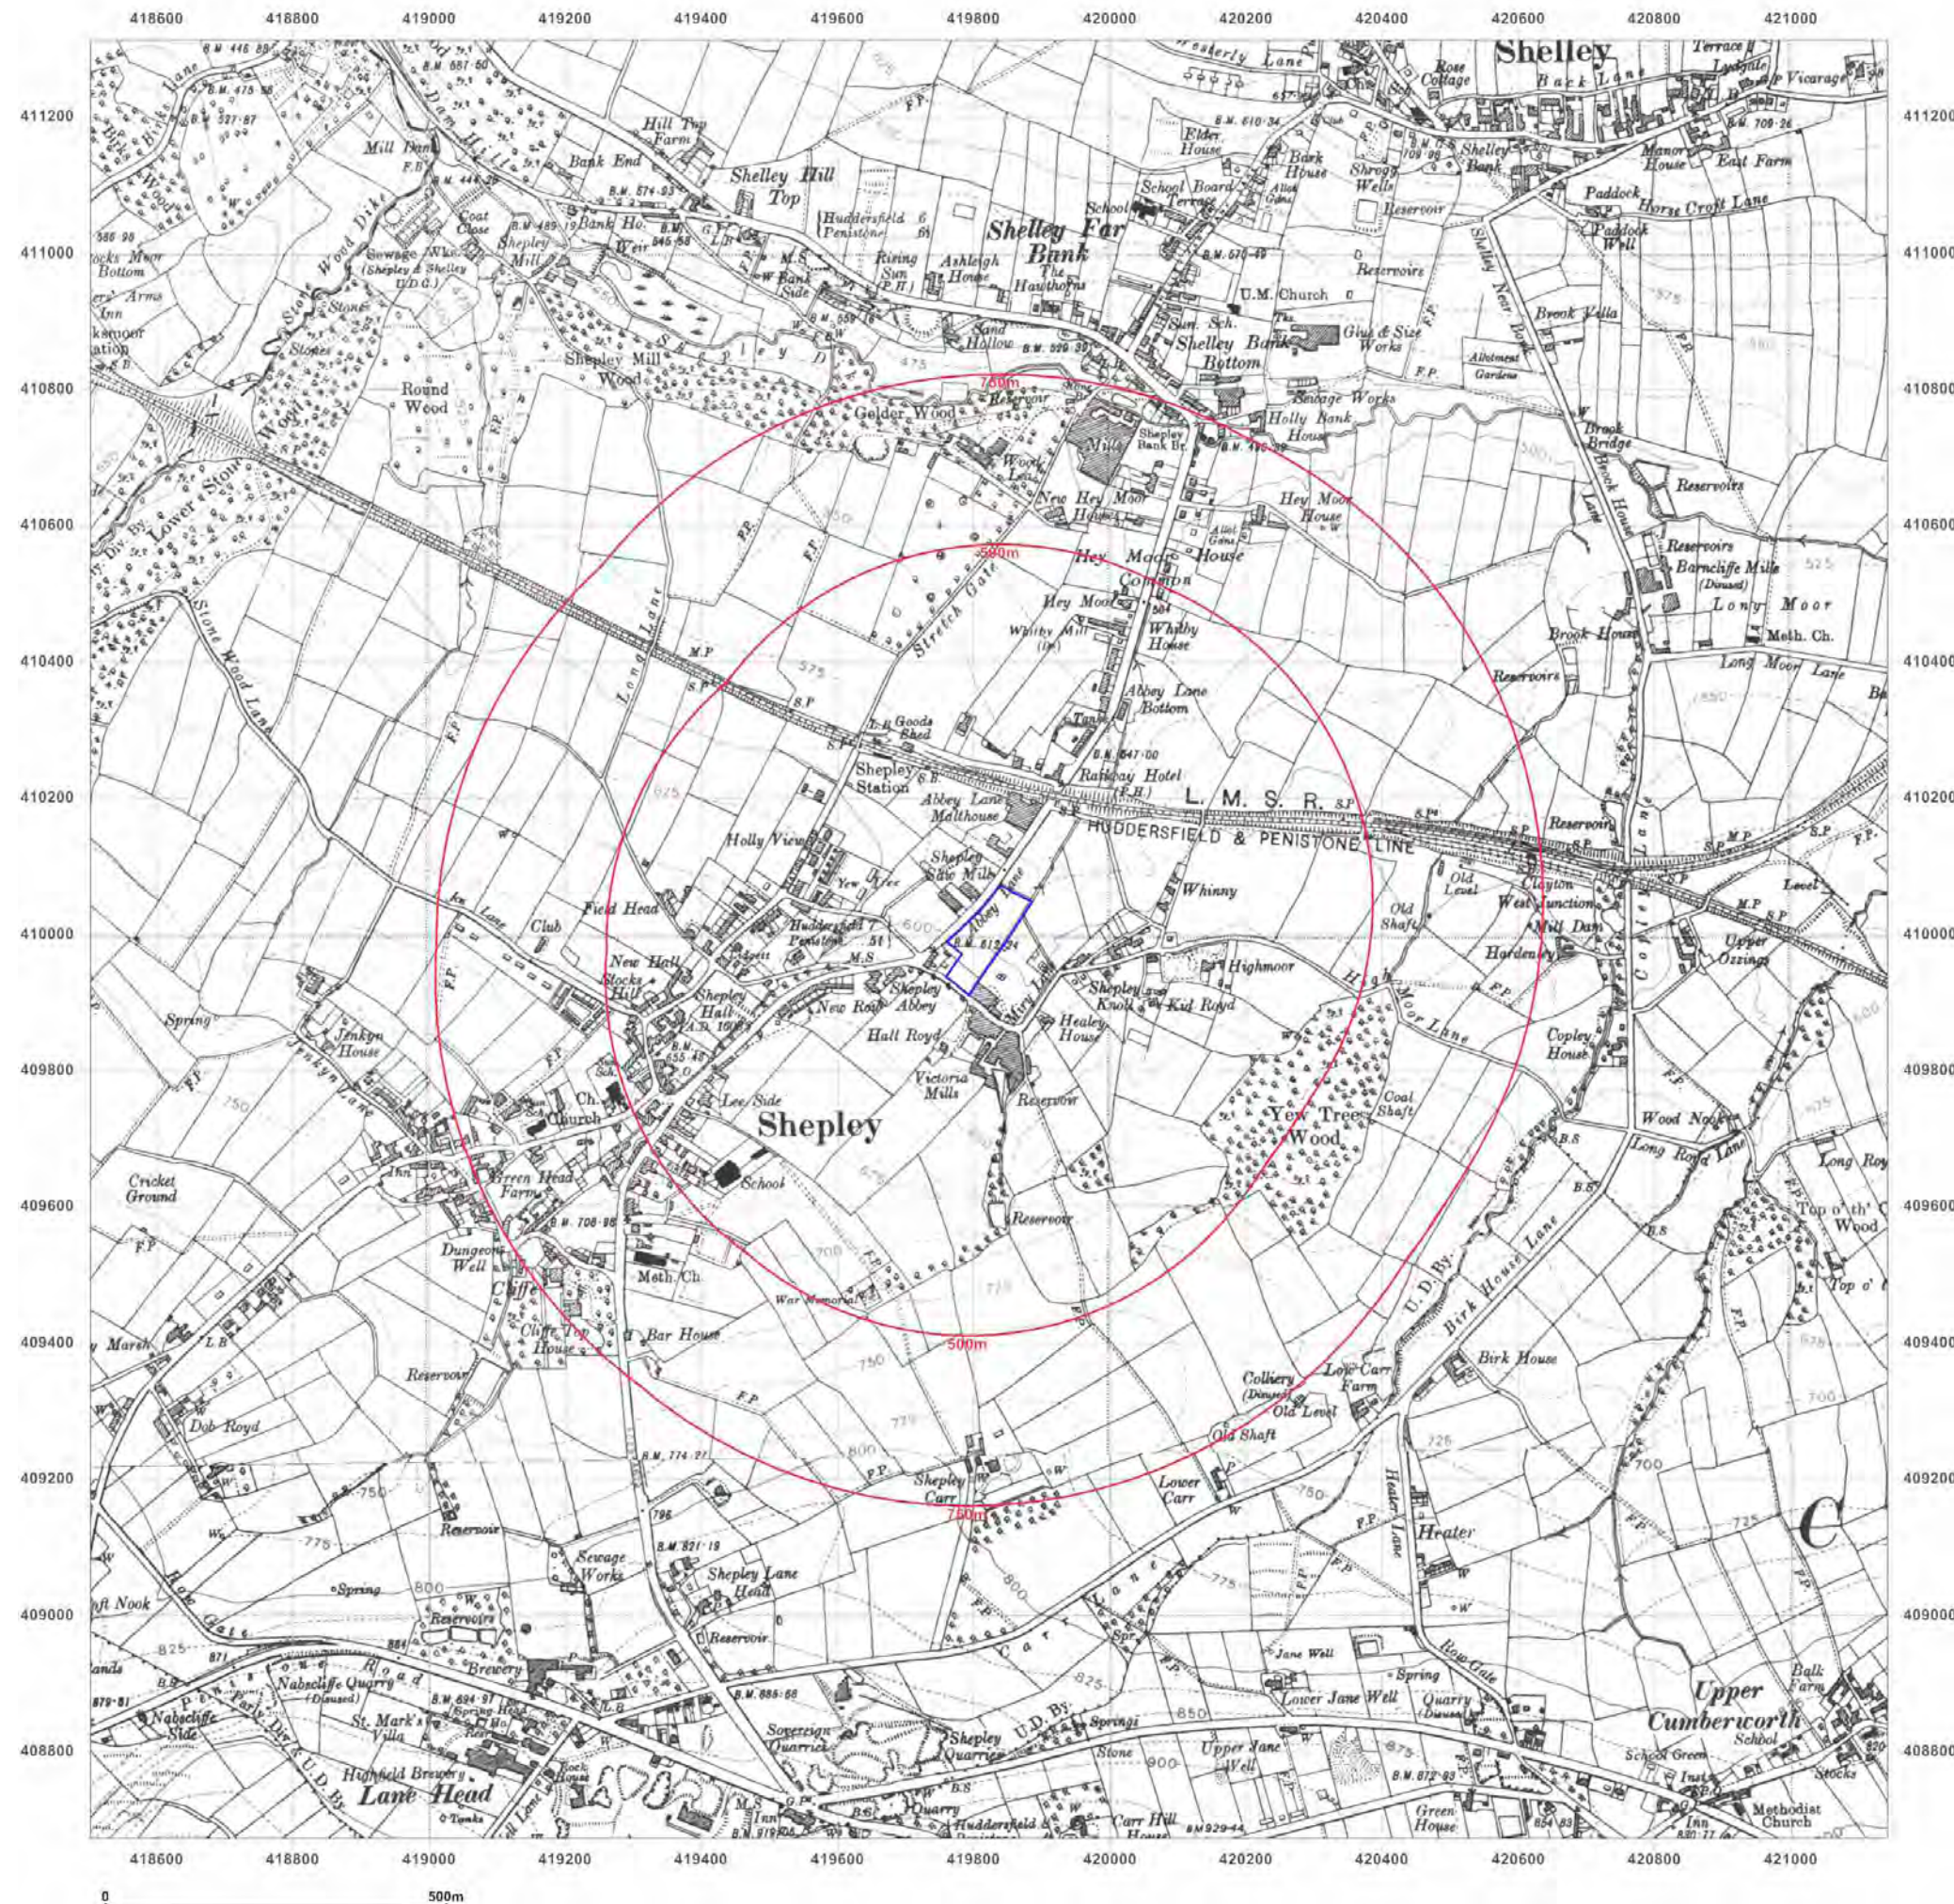

Site Details:

419815, 410001

Client Ref: YORKSHIRE_COUNTRY_PROPERTIES_7465
Report Ref: GS-6047538
Grid Ref: 419822, 409992

Map Name: Provisional

Map date: 1951-1955

Scale: 1:10,560

Printed at: 1:10,560



Surveyed N/A
 Revised 1955
 Edition N/A
 Copyright 1955
 Levelled N/A

Surveyed N/A
 Revised 1955
 Edition N/A
 Copyright 1955
 Levelled N/A

Surveyed N/A
 Revised 1955
 Edition N/A
 Copyright N/A
 Levelled N/A

Surveyed 1951
 Revised 1951
 Edition N/A
 Copyright N/A
 Levelled N/A




Produced by
 Groundsure Insights
 T: 08444 159000
 E: info@groundsure.com
 W: www.groundsure.com

© Crown copyright and database rights 2018 Ordnance Survey 100035207

Production date: 22 May 2019

Map legend available at:
www.groundsure.com/sites/default/files/groundsure_legend.pdf

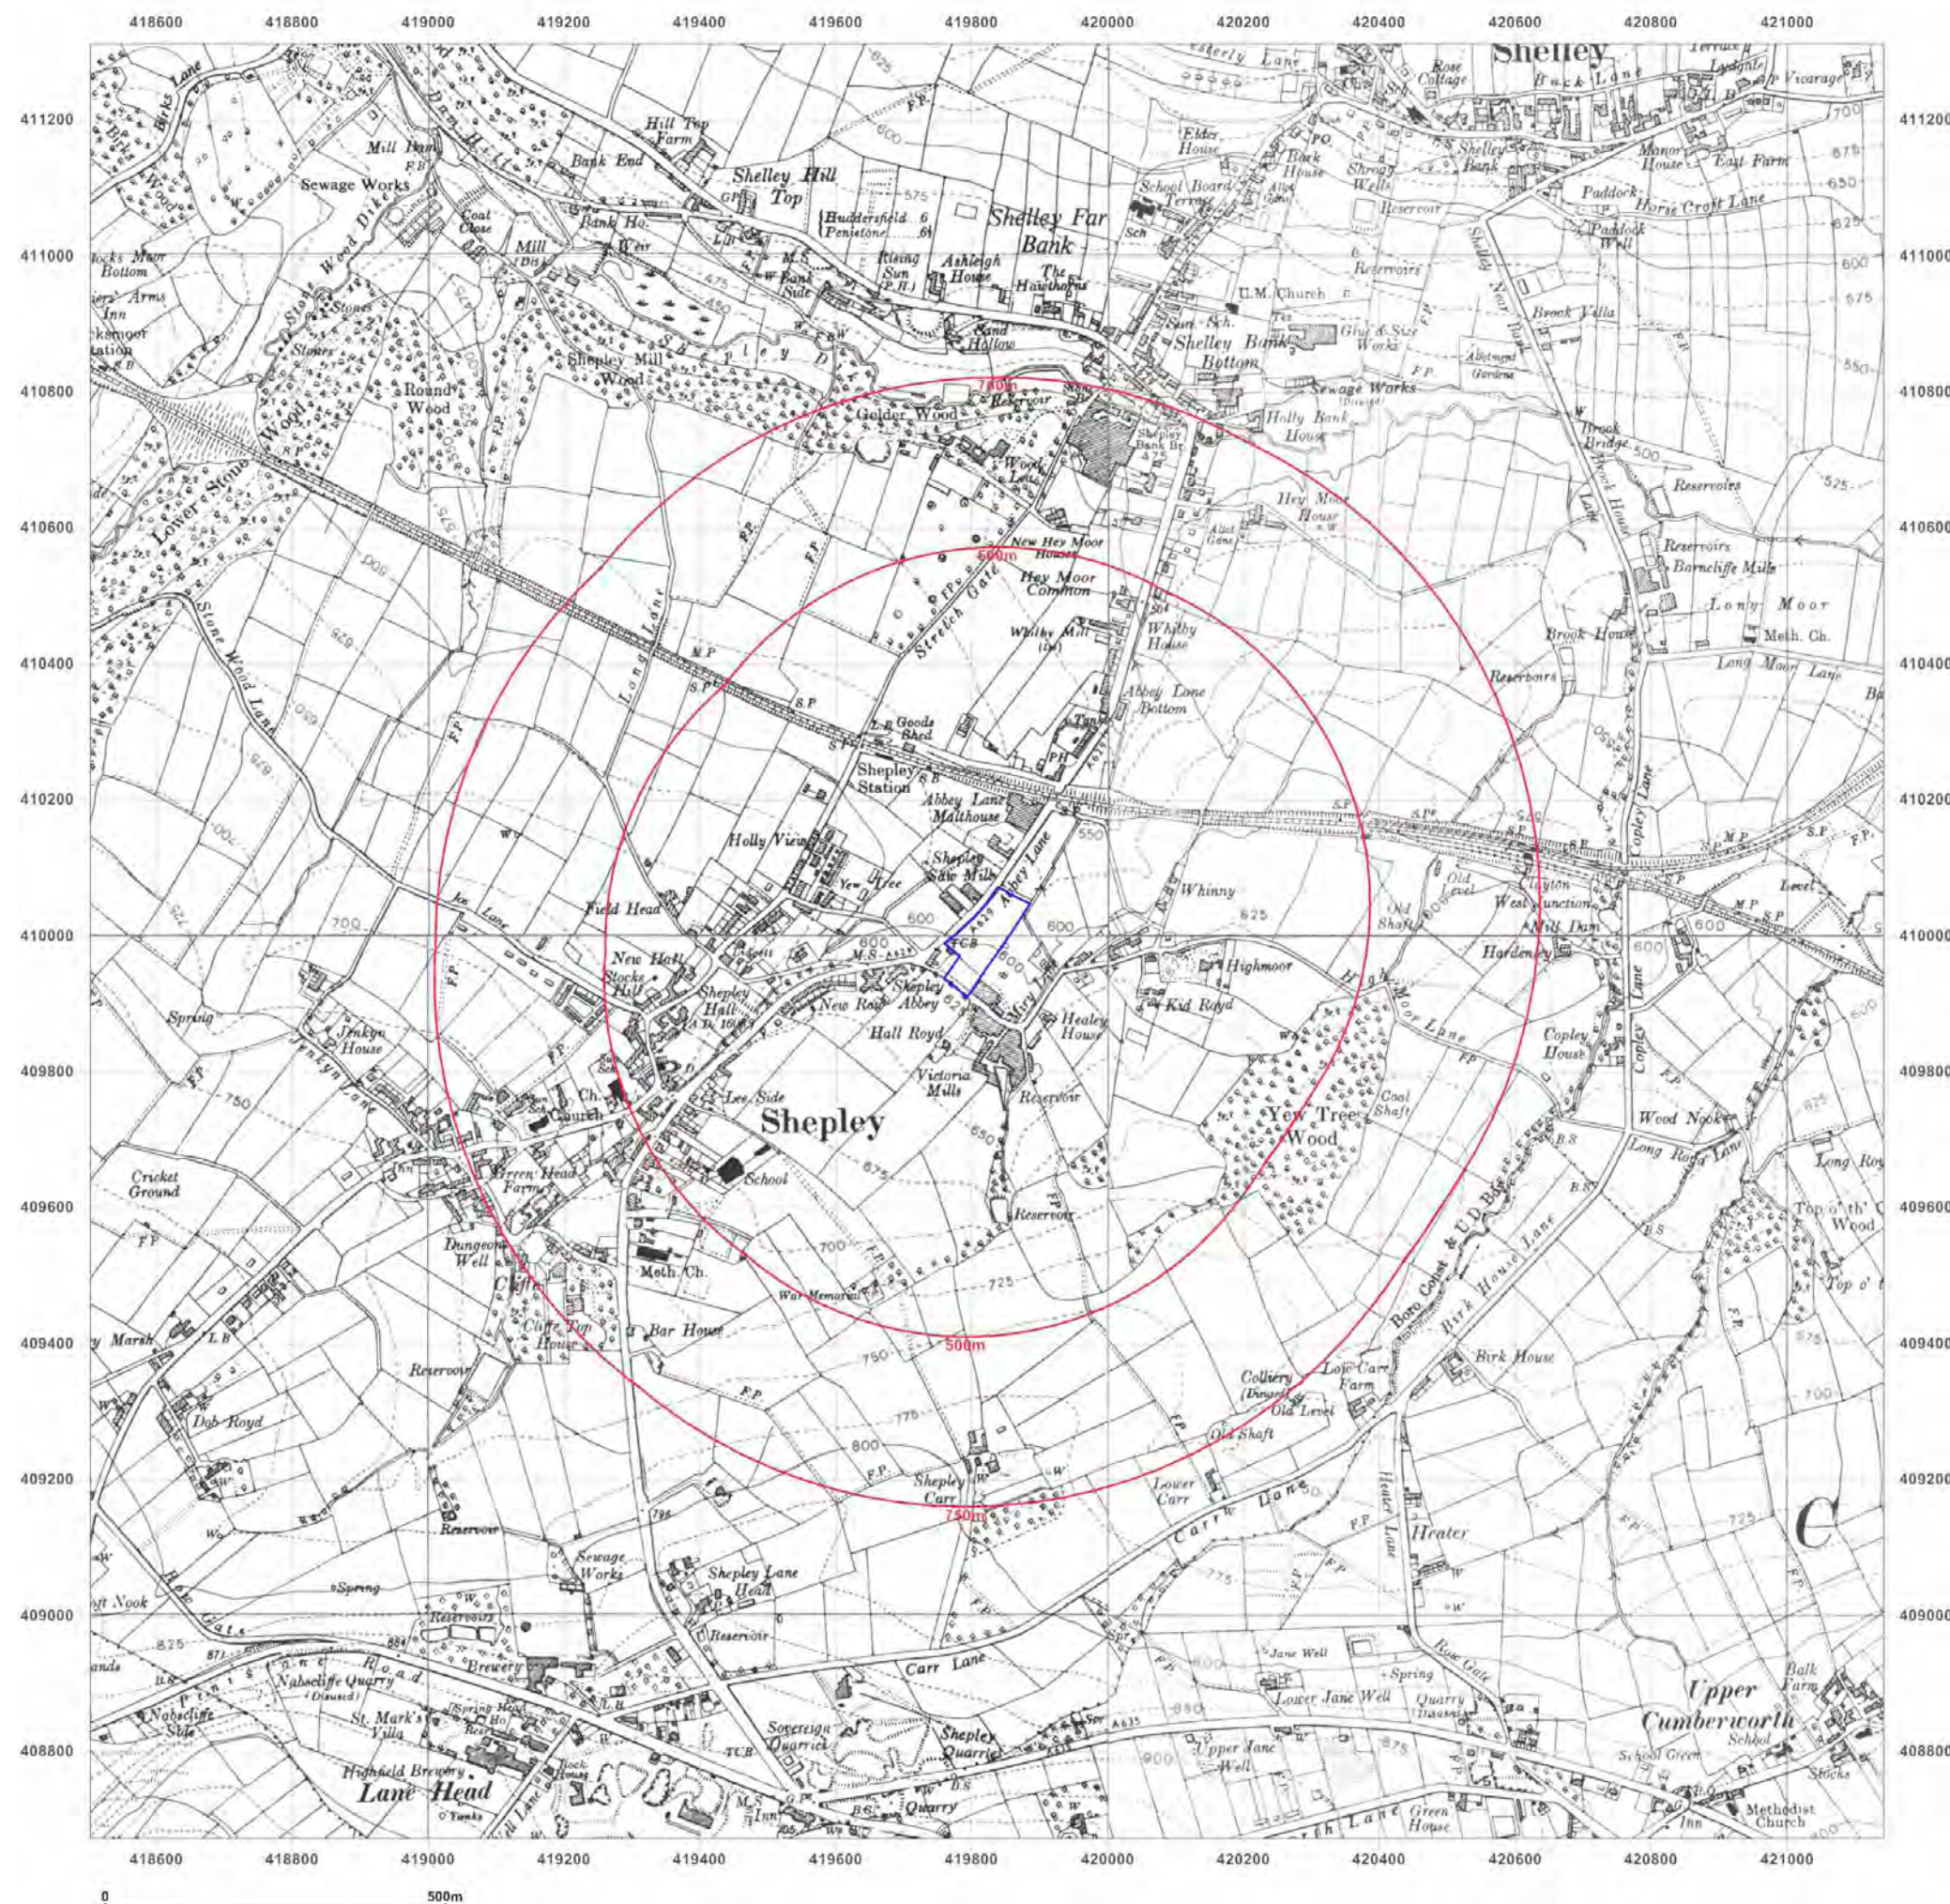

Site Details:

419815, 410001

Client Ref: YORKSHIRE_COUNTRY_PROPERTIES_7465
Report Ref: GS-6047538
Grid Ref: 419822, 409992

Map Name: Provisional

Map date: 1967-1970

Scale: 1:10,560

Printed at: 1:10,560



Surveyed 1968
 Revised 1968
 Edition N/A
 Copyright N/A
 Levelled N/A

Surveyed 1967
 Revised 1967
 Edition N/A
 Copyright N/A
 Levelled N/A

Surveyed 1968
 Revised 1970
 Edition N/A
 Copyright N/A
 Levelled N/A

Surveyed 1967
 Revised 1967
 Edition N/A
 Copyright N/A
 Levelled N/A




Produced by
 Groundsure Insights
 T: 08444 159000
 E: info@groundsure.com
 W: www.groundsure.com

© Crown copyright and database rights 2018 Ordnance Survey 100035207

Production date: 22 May 2019

Map legend available at:
www.groundsure.com/sites/default/files/groundsure_legend.pdf

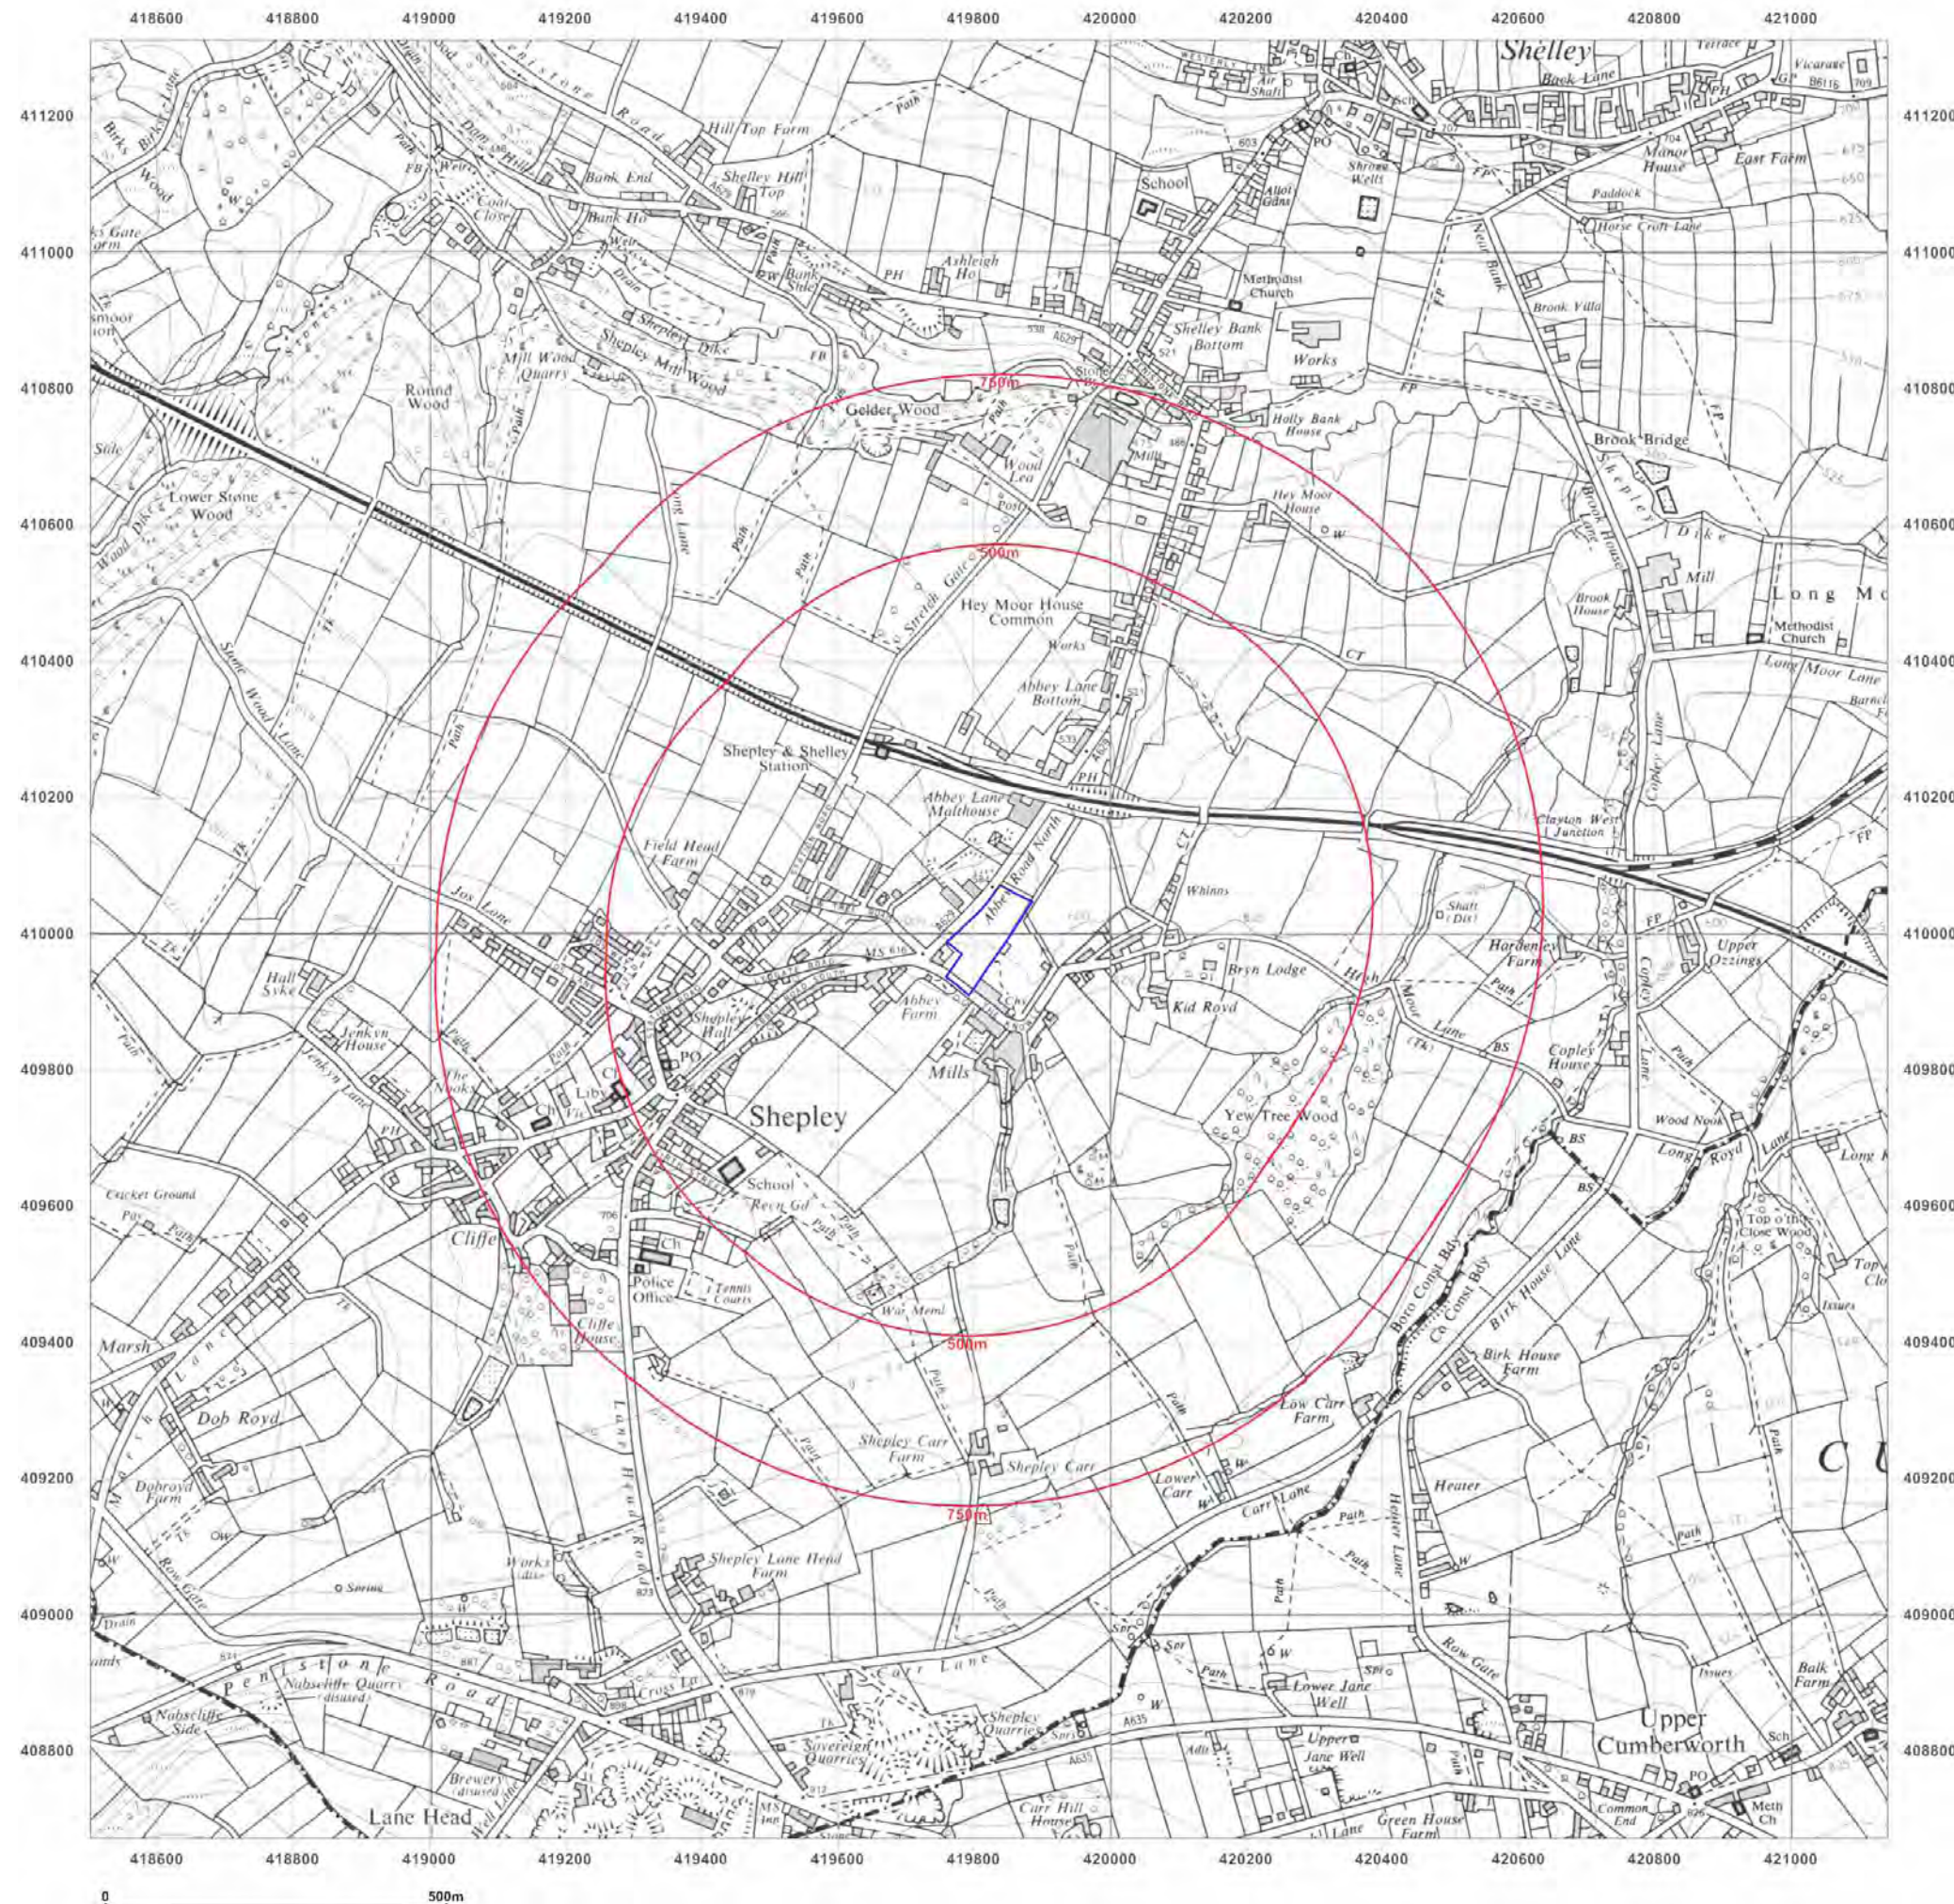

Site Details:

419815, 410001


Client Ref: YORKSHIRE_COUNTRY_PROPERTIES_7465
Report Ref: GS-6047538
Grid Ref: 419822, 409992

Map Name: National Grid

Map date: 1983

Scale: 1:10,000

Printed at: 1:10,000

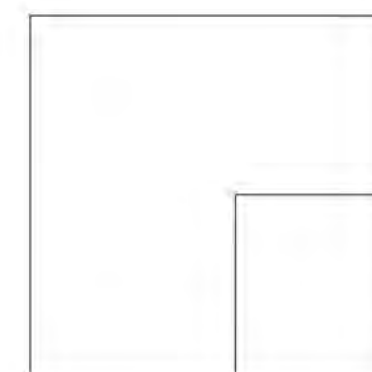

Surveyed 1980
 Revised 1983
 Edition N/A
 Copyright N/A
 Levelled N/A




Produced by
 Groundsure Insights
 T: 08444 159000
 E: info@groundsure.com
 W: www.groundsure.com

© Crown copyright and database rights 2018 Ordnance Survey 100035207

Production date: 22 May 2019

Map legend available at:
www.groundsure.com/sites/default/files/groundsure_legend.pdf

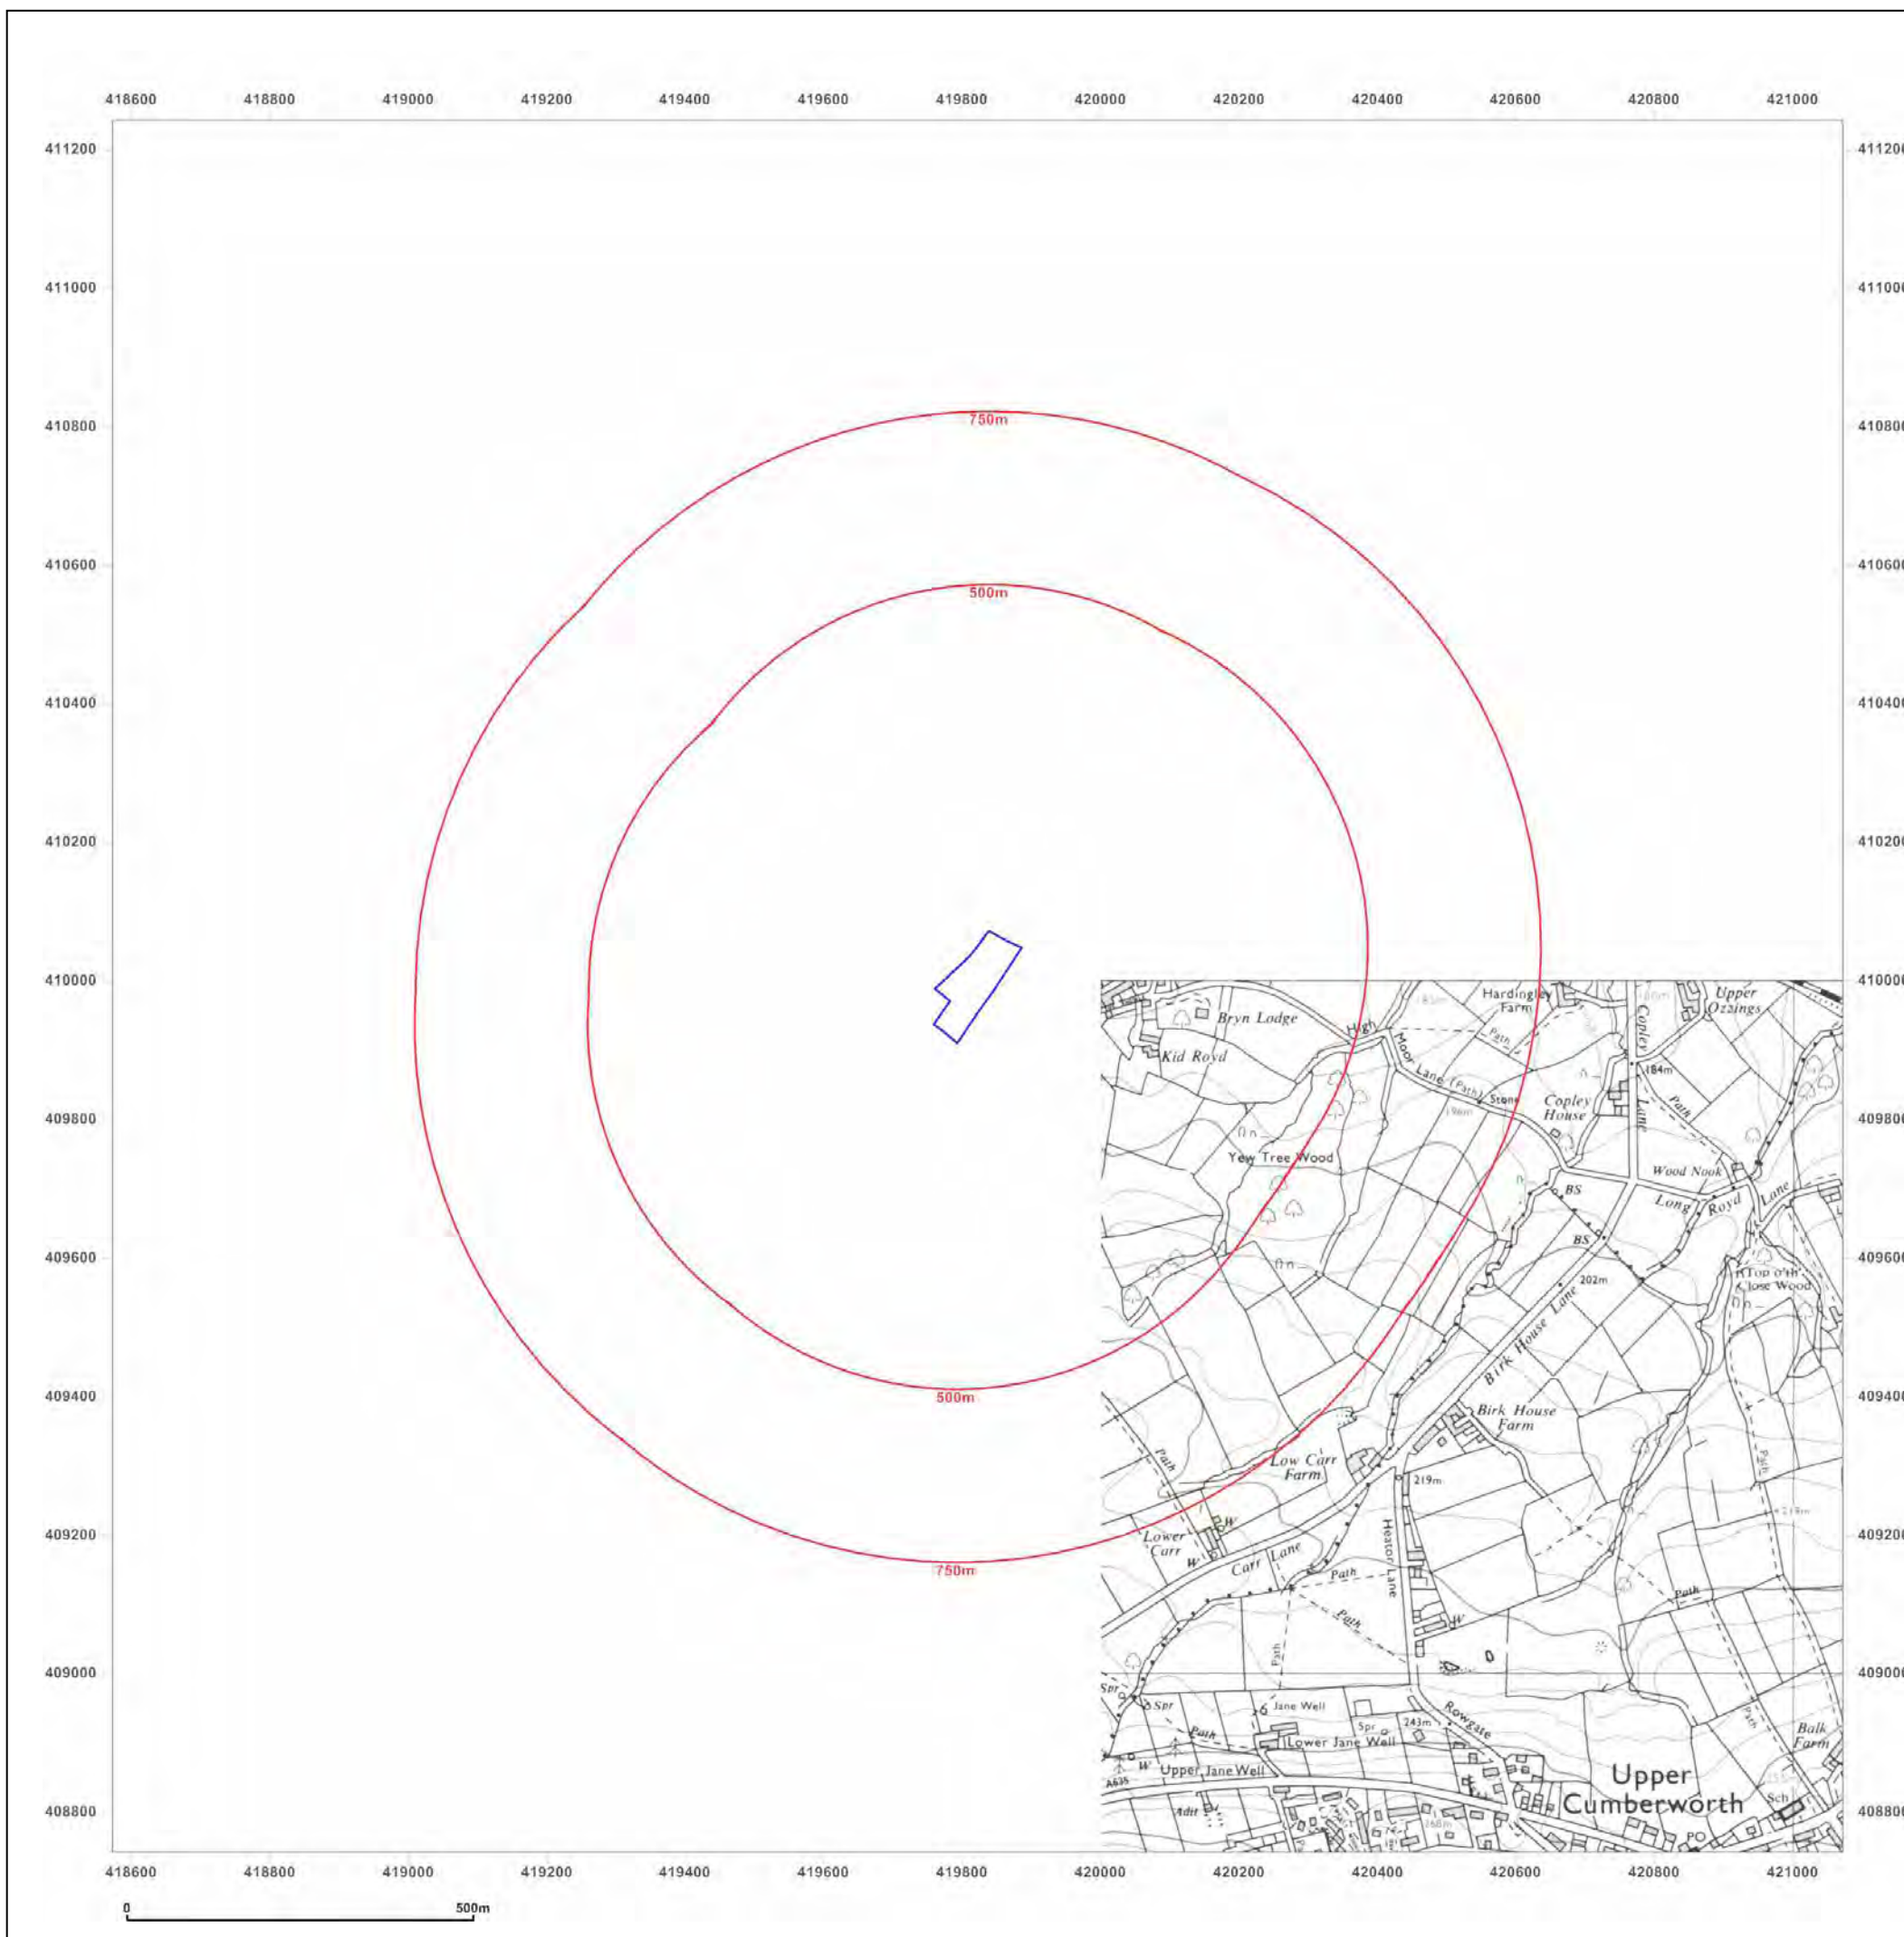

Site Details:

419815, 410001

Client Ref: YORKSHIRE_COUNTRY_PROPERTIES_7465
Report Ref: GS-6047538
Grid Ref: 419822, 409992

Map Name: National Grid

Map date: 1990-1993


Scale: 1:10,000

Printed at: 1:10,000



Surveyed 1984
 Revised 1990
 Edition N/A
 Copyright N/A
 Levelled N/A

Surveyed 1990
 Revised 1993
 Edition N/A
 Copyright N/A
 Levelled N/A

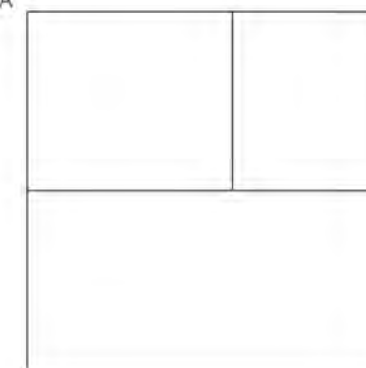


Produced by
 Groundsure Insights
 T: 08444 159000
 E: info@groundsure.com
 W: www.groundsure.com

© Crown copyright and database rights 2018 Ordnance Survey 100035207

Production date: 22 May 2019

Map legend available at:
www.groundsure.com/sites/default/files/groundsure_legend.pdf

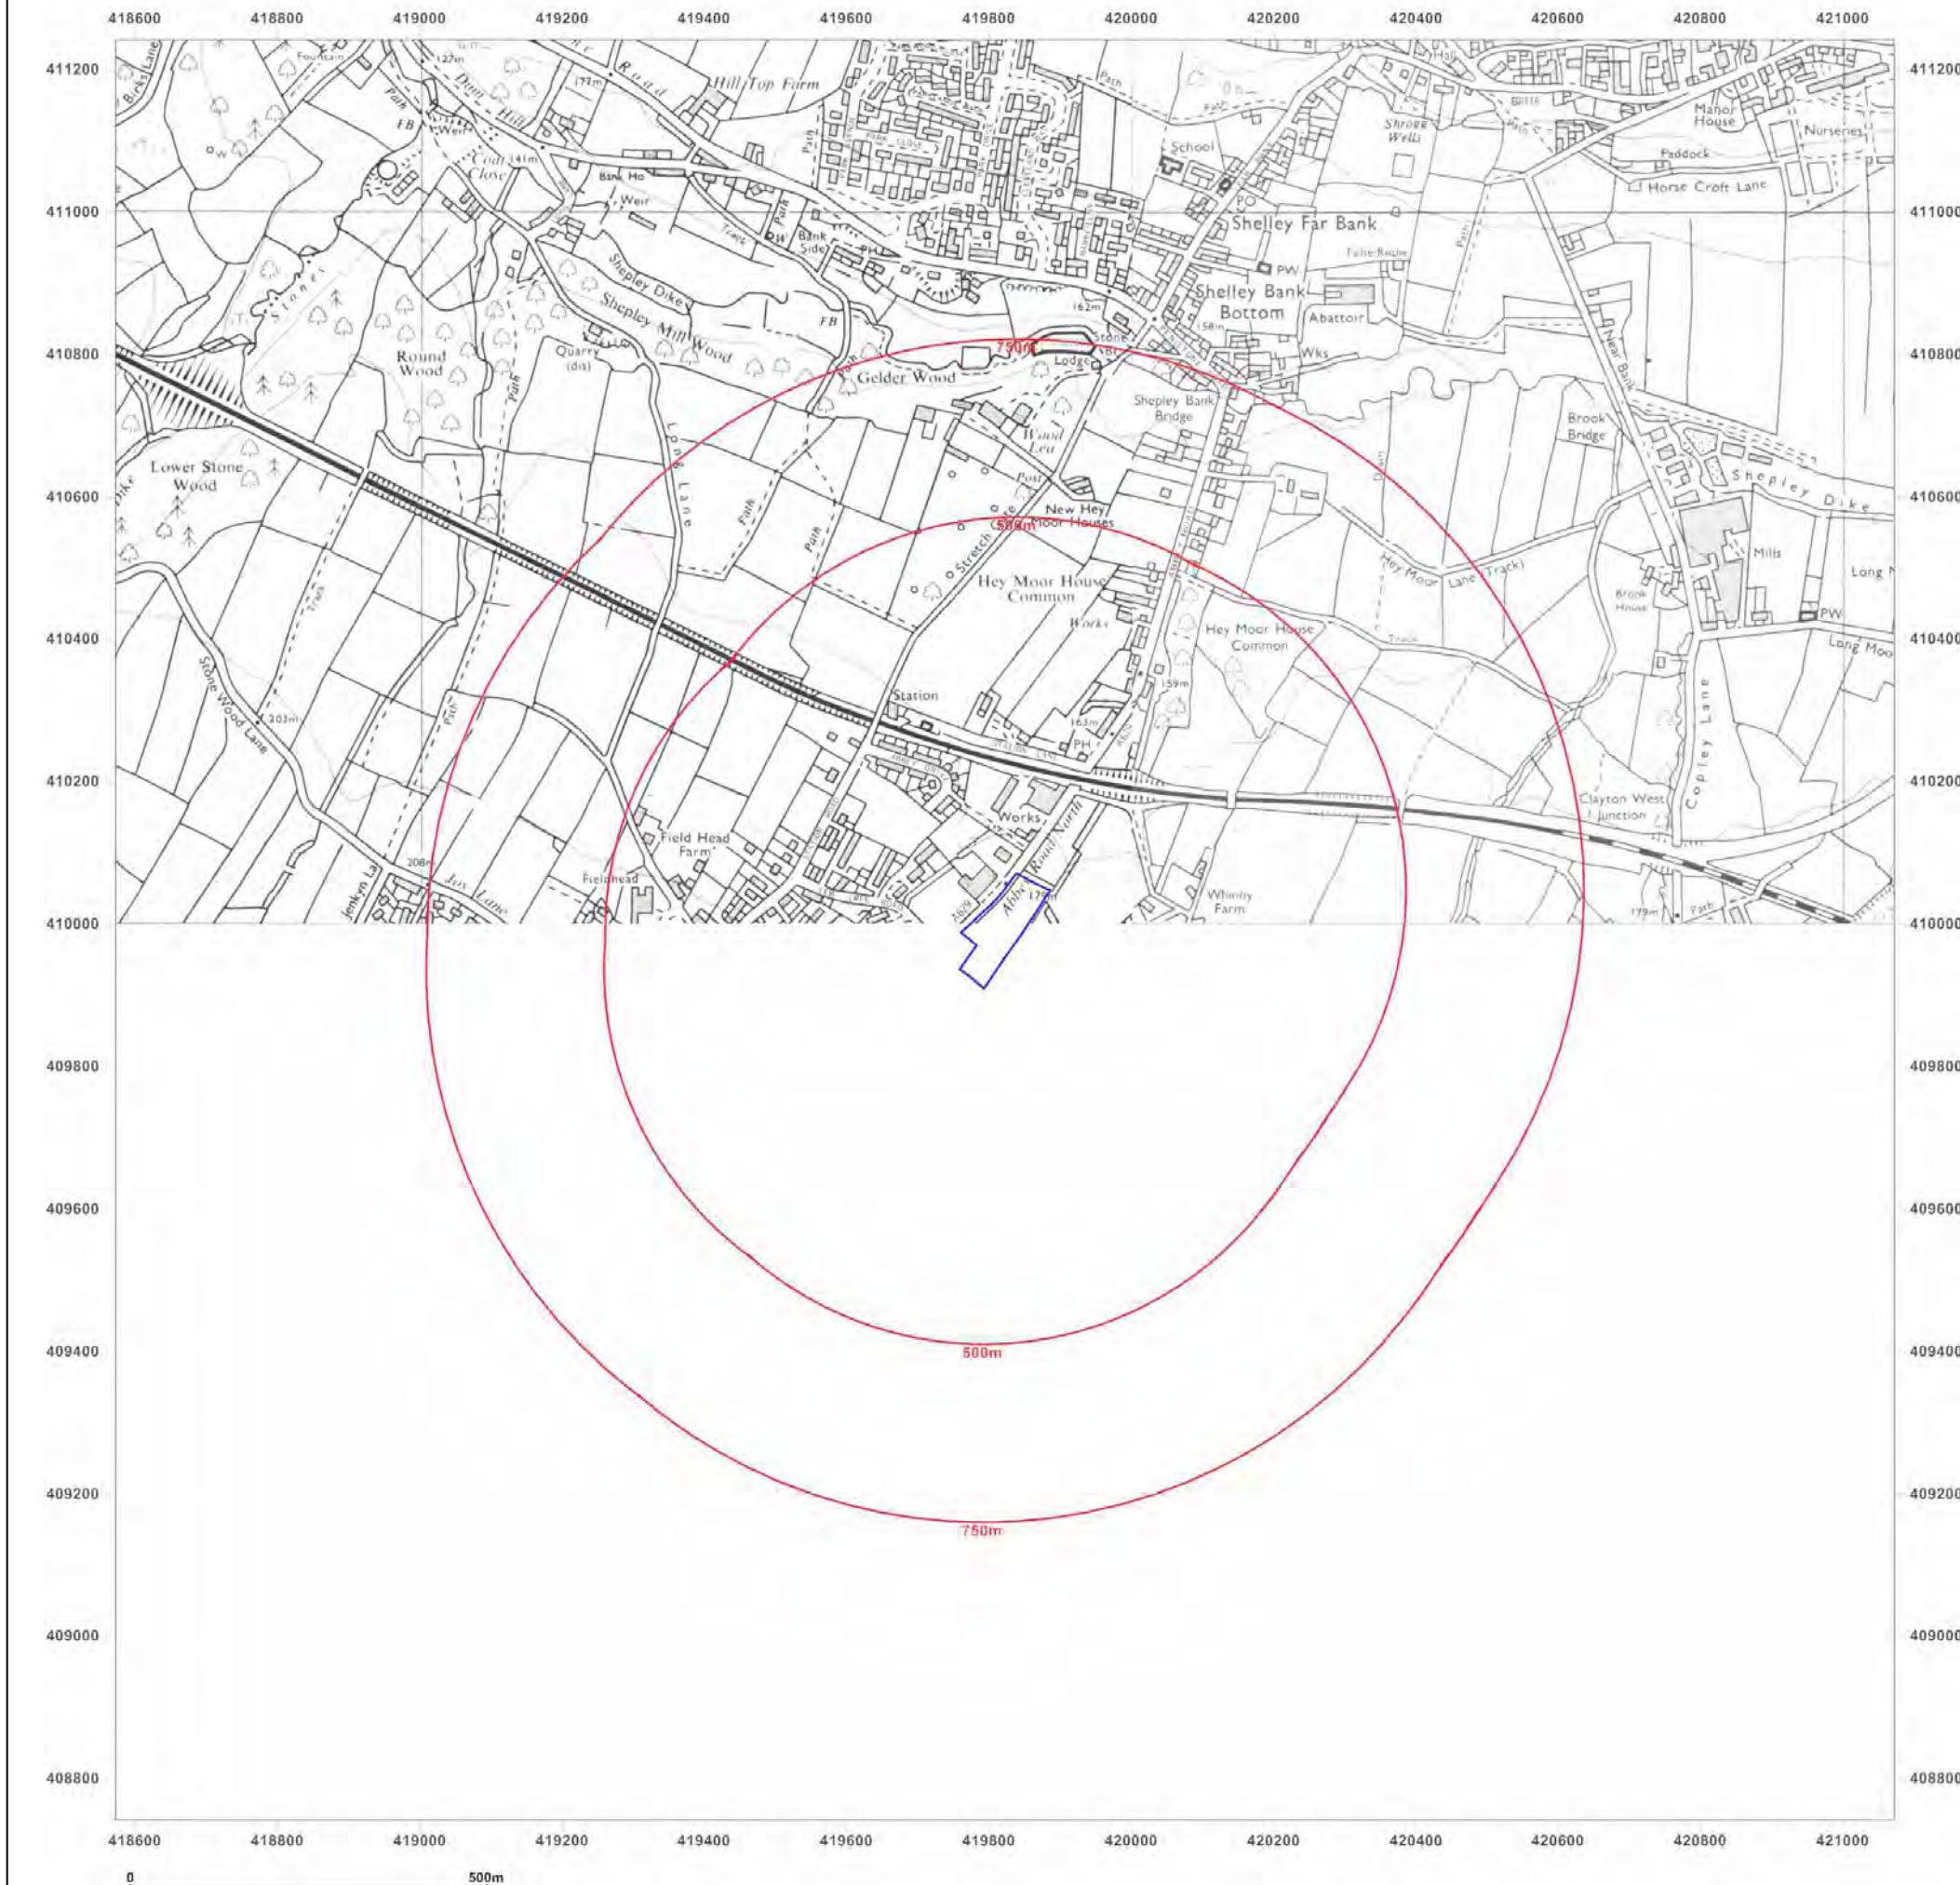

Site Details:

419815, 410001

Client Ref: YORKSHIRE_COUNTRY_PROPERTIES_7465
Report Ref: GS-6047538
Grid Ref: 419822, 409992

Map Name: 1:10,000 Raster

Map date: 2002

Scale: 1:10,000

Printed at: 1:10,000




Produced by
 Groundsure Insights
 T: 08444 159000
 E: info@groundsure.com
 W: www.groundsure.com

© Crown copyright and database rights 2018 Ordnance Survey 100035207

Production date: 22 May 2019

Map legend available at:
www.groundsure.com/sites/default/files/groundsure_legend.pdf

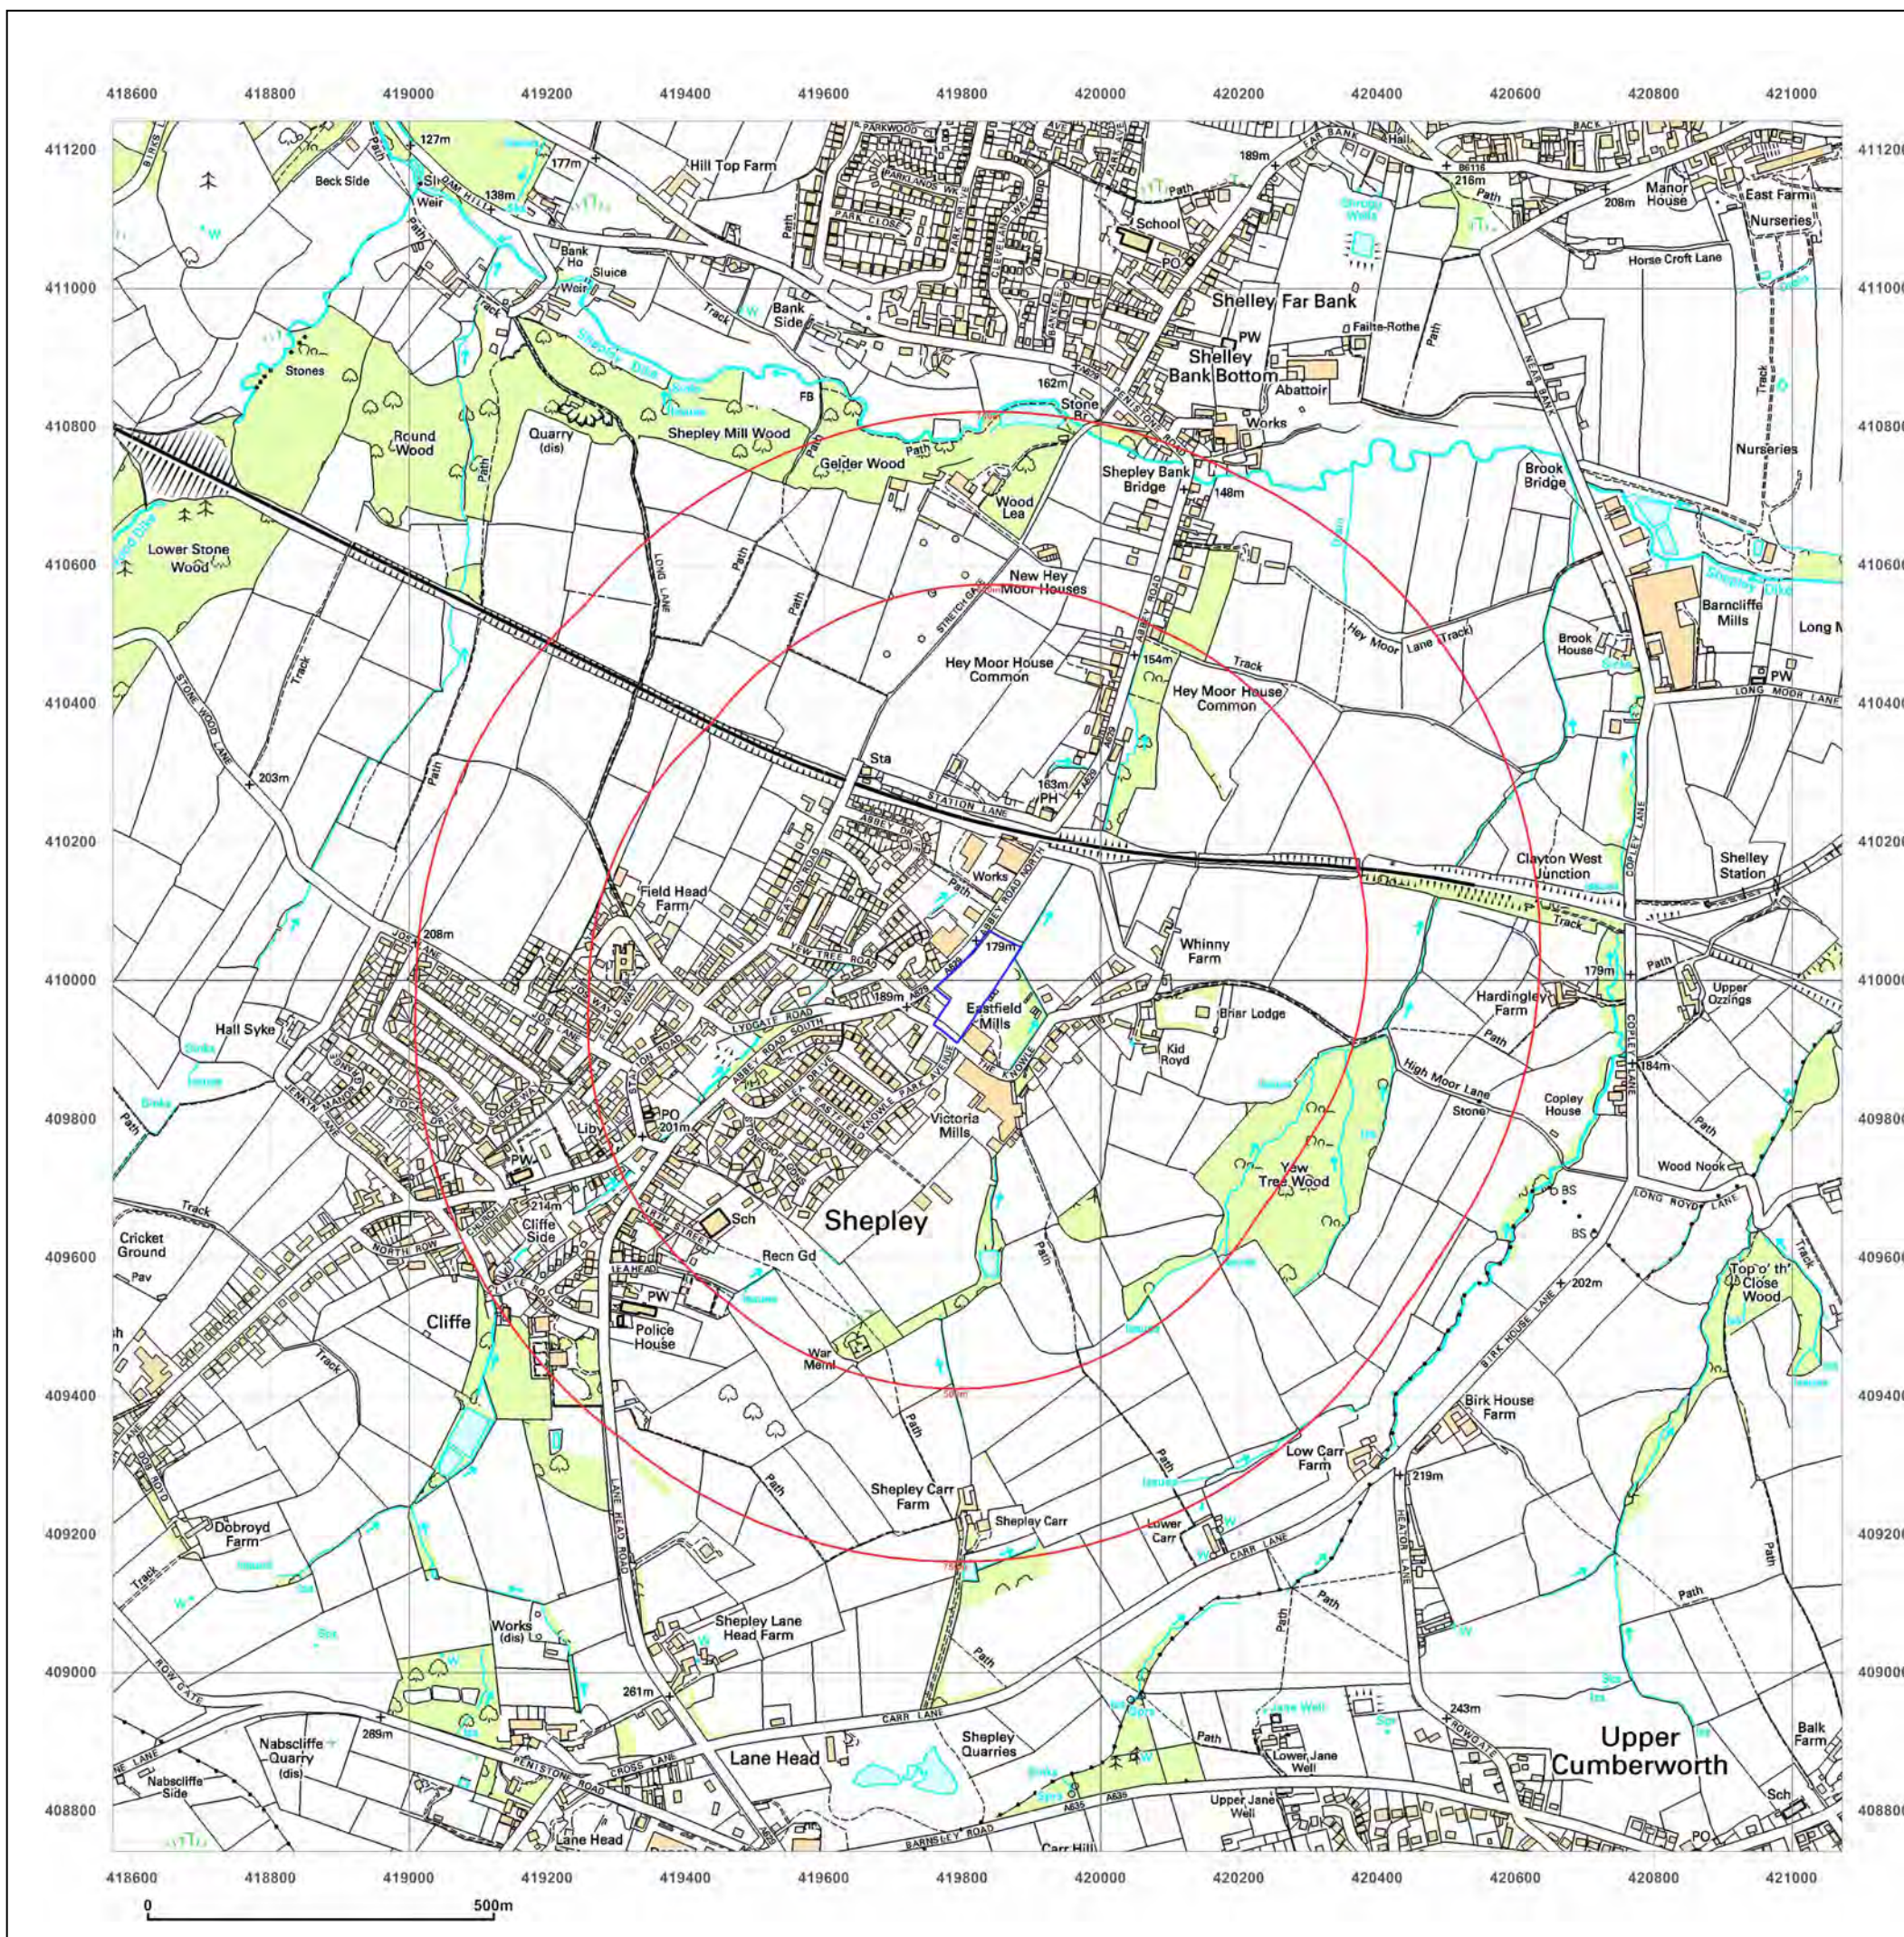

Site Details:

419815, 410001

Client Ref: YORKSHIRE_COUNTRY_PROPERTIES_7465
Report Ref: GS-6047538
Grid Ref: 419822, 409992

Map Name: National Grid

Map date: 2010

Scale: 1:10,000

Printed at: 1:10,000




Produced by
 Groundsure Insights
 T: 08444 159000
 E: info@groundsure.com
 W: www.groundsure.com

© Crown copyright and database rights 2018 Ordnance Survey 100035207

Production date: 22 May 2019

Map legend available at:
www.groundsure.com/sites/default/files/groundsure_legend.pdf

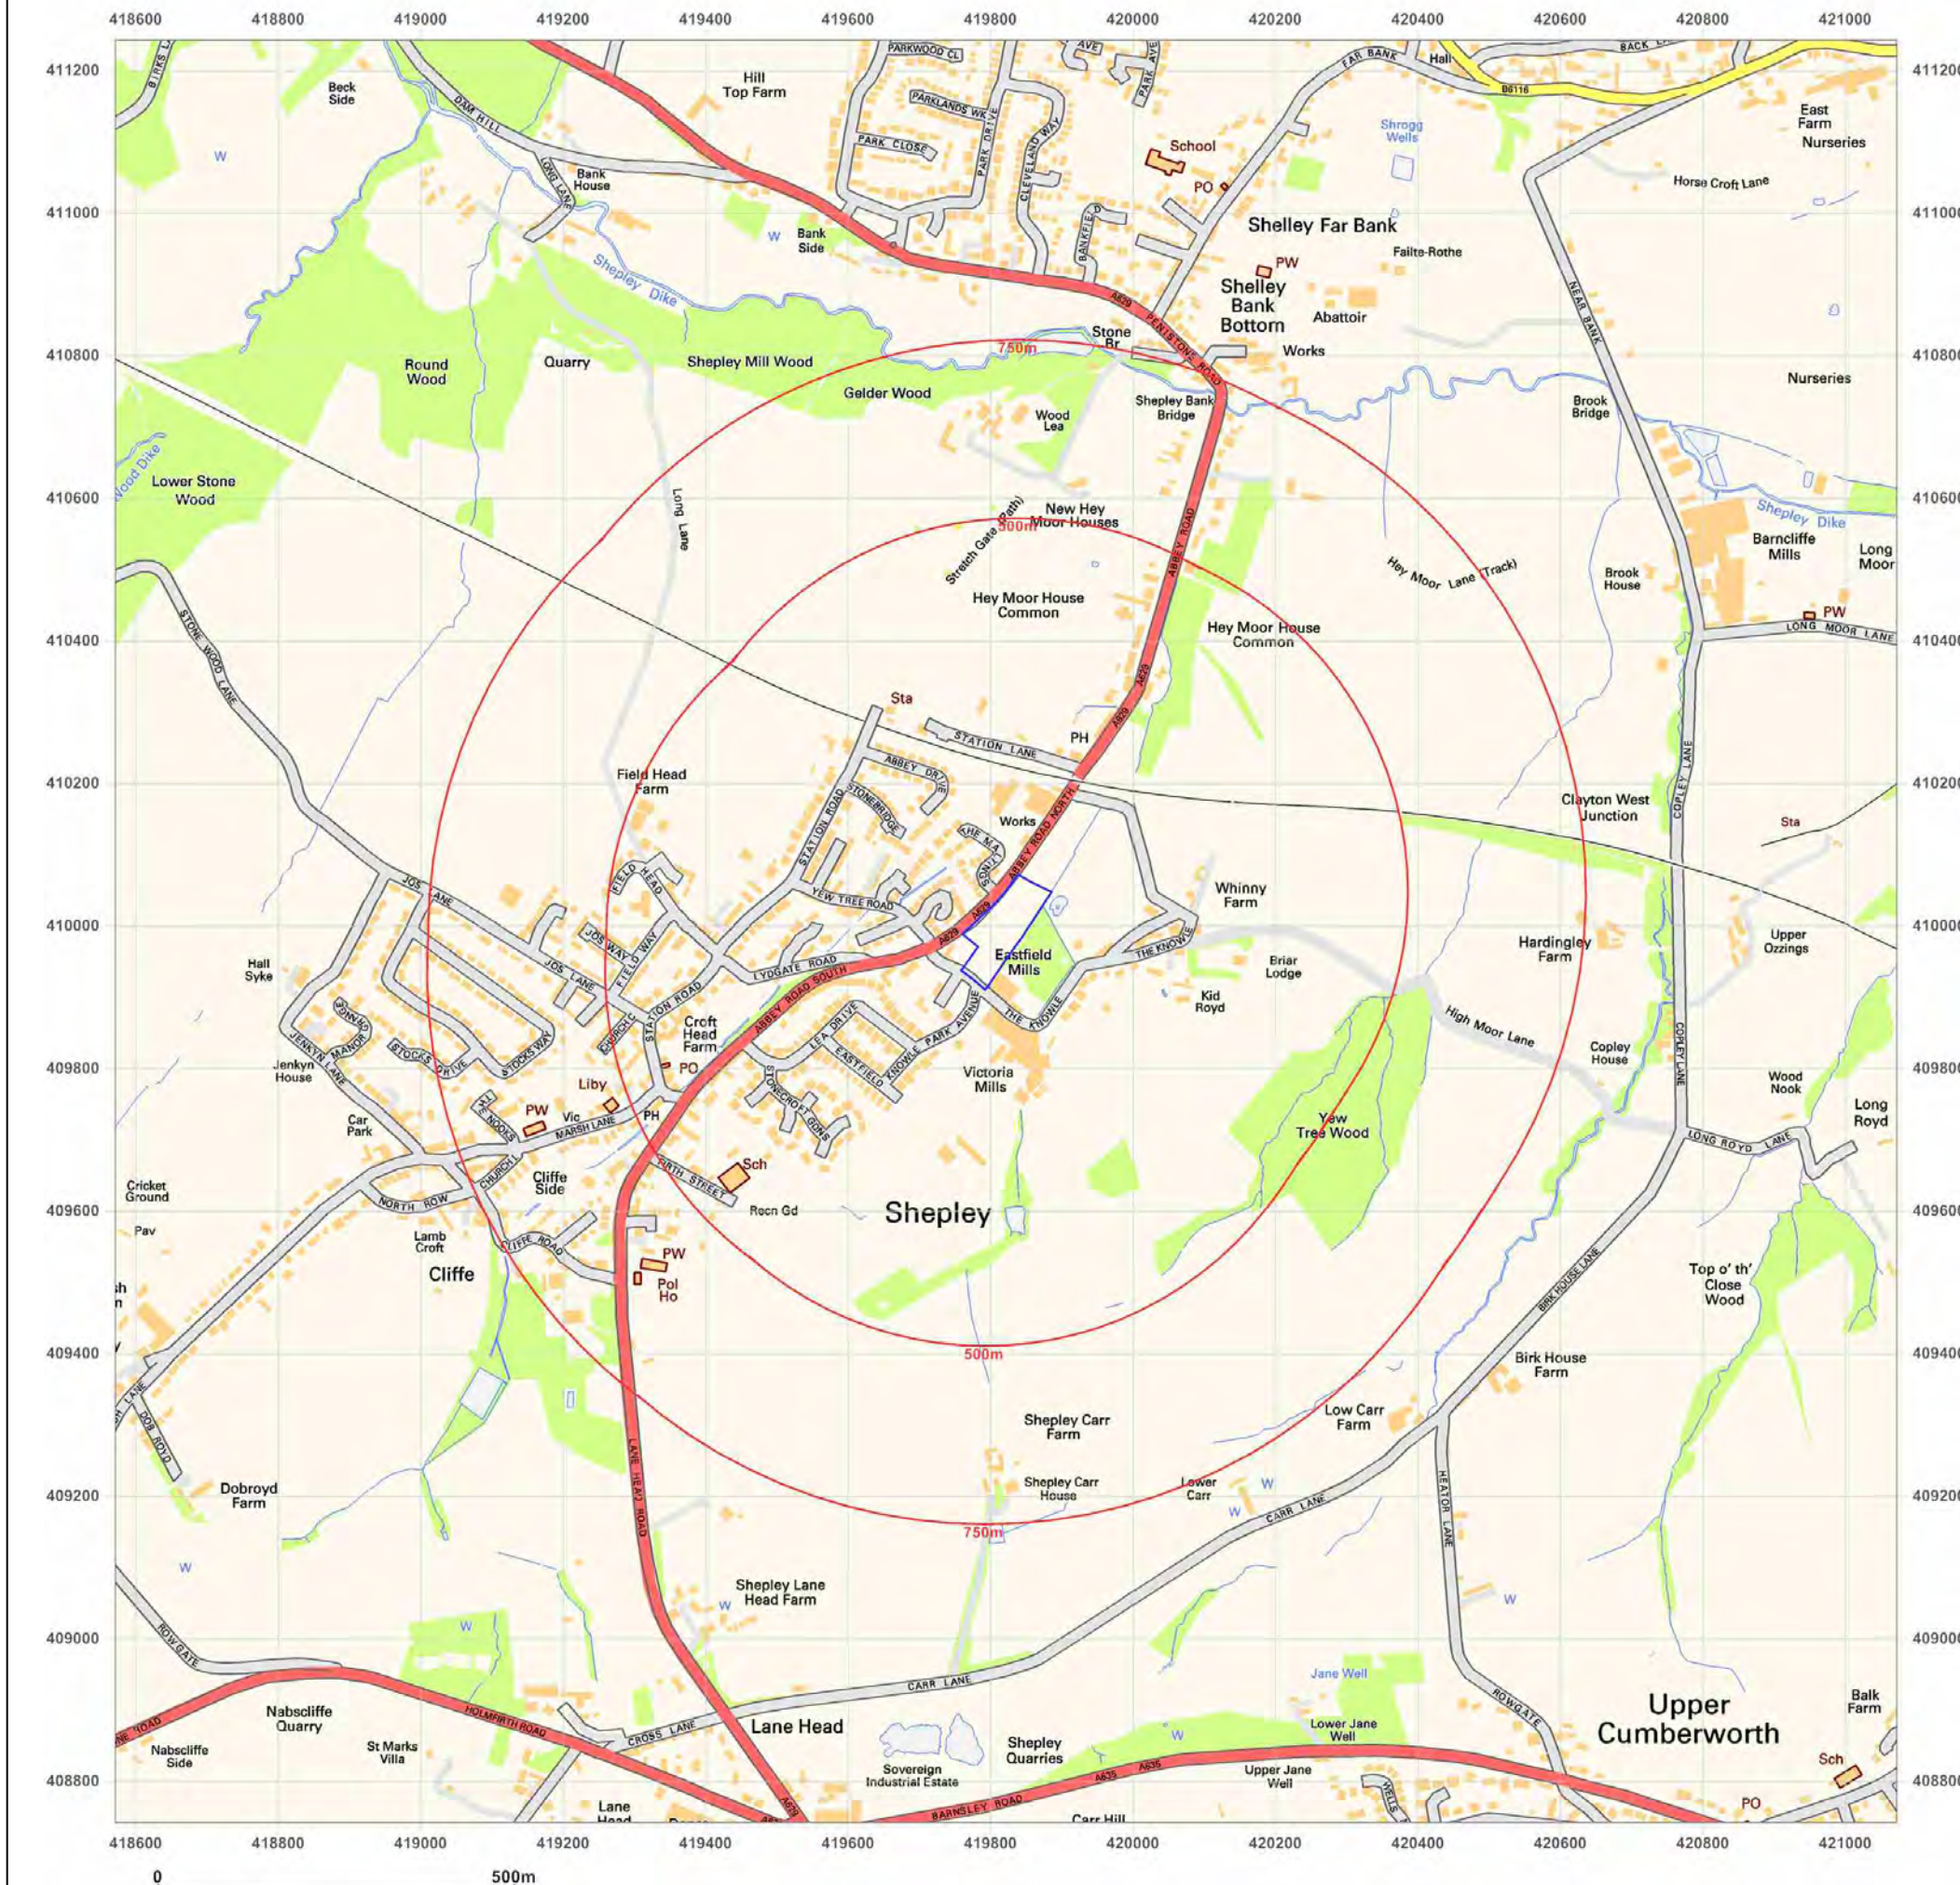

Site Details:

419815, 410001

Client Ref: YORKSHIRE_COUNTRY_PROPERTIES_7465
Report Ref: GS-6047538
Grid Ref: 419822, 409992

Map Name: National Grid

Map date: 2014

Scale: 1:10,000

Printed at: 1:10,000




Produced by
 Groundsure Insights
 T: 08444 159000
 E: info@groundsure.com
 W: www.groundsure.com

© Crown copyright and database rights 2018 Ordnance Survey 100035207

Production date: 22 May 2019

Map legend available at:
www.groundsure.com/sites/default/files/groundsure_legend.pdf

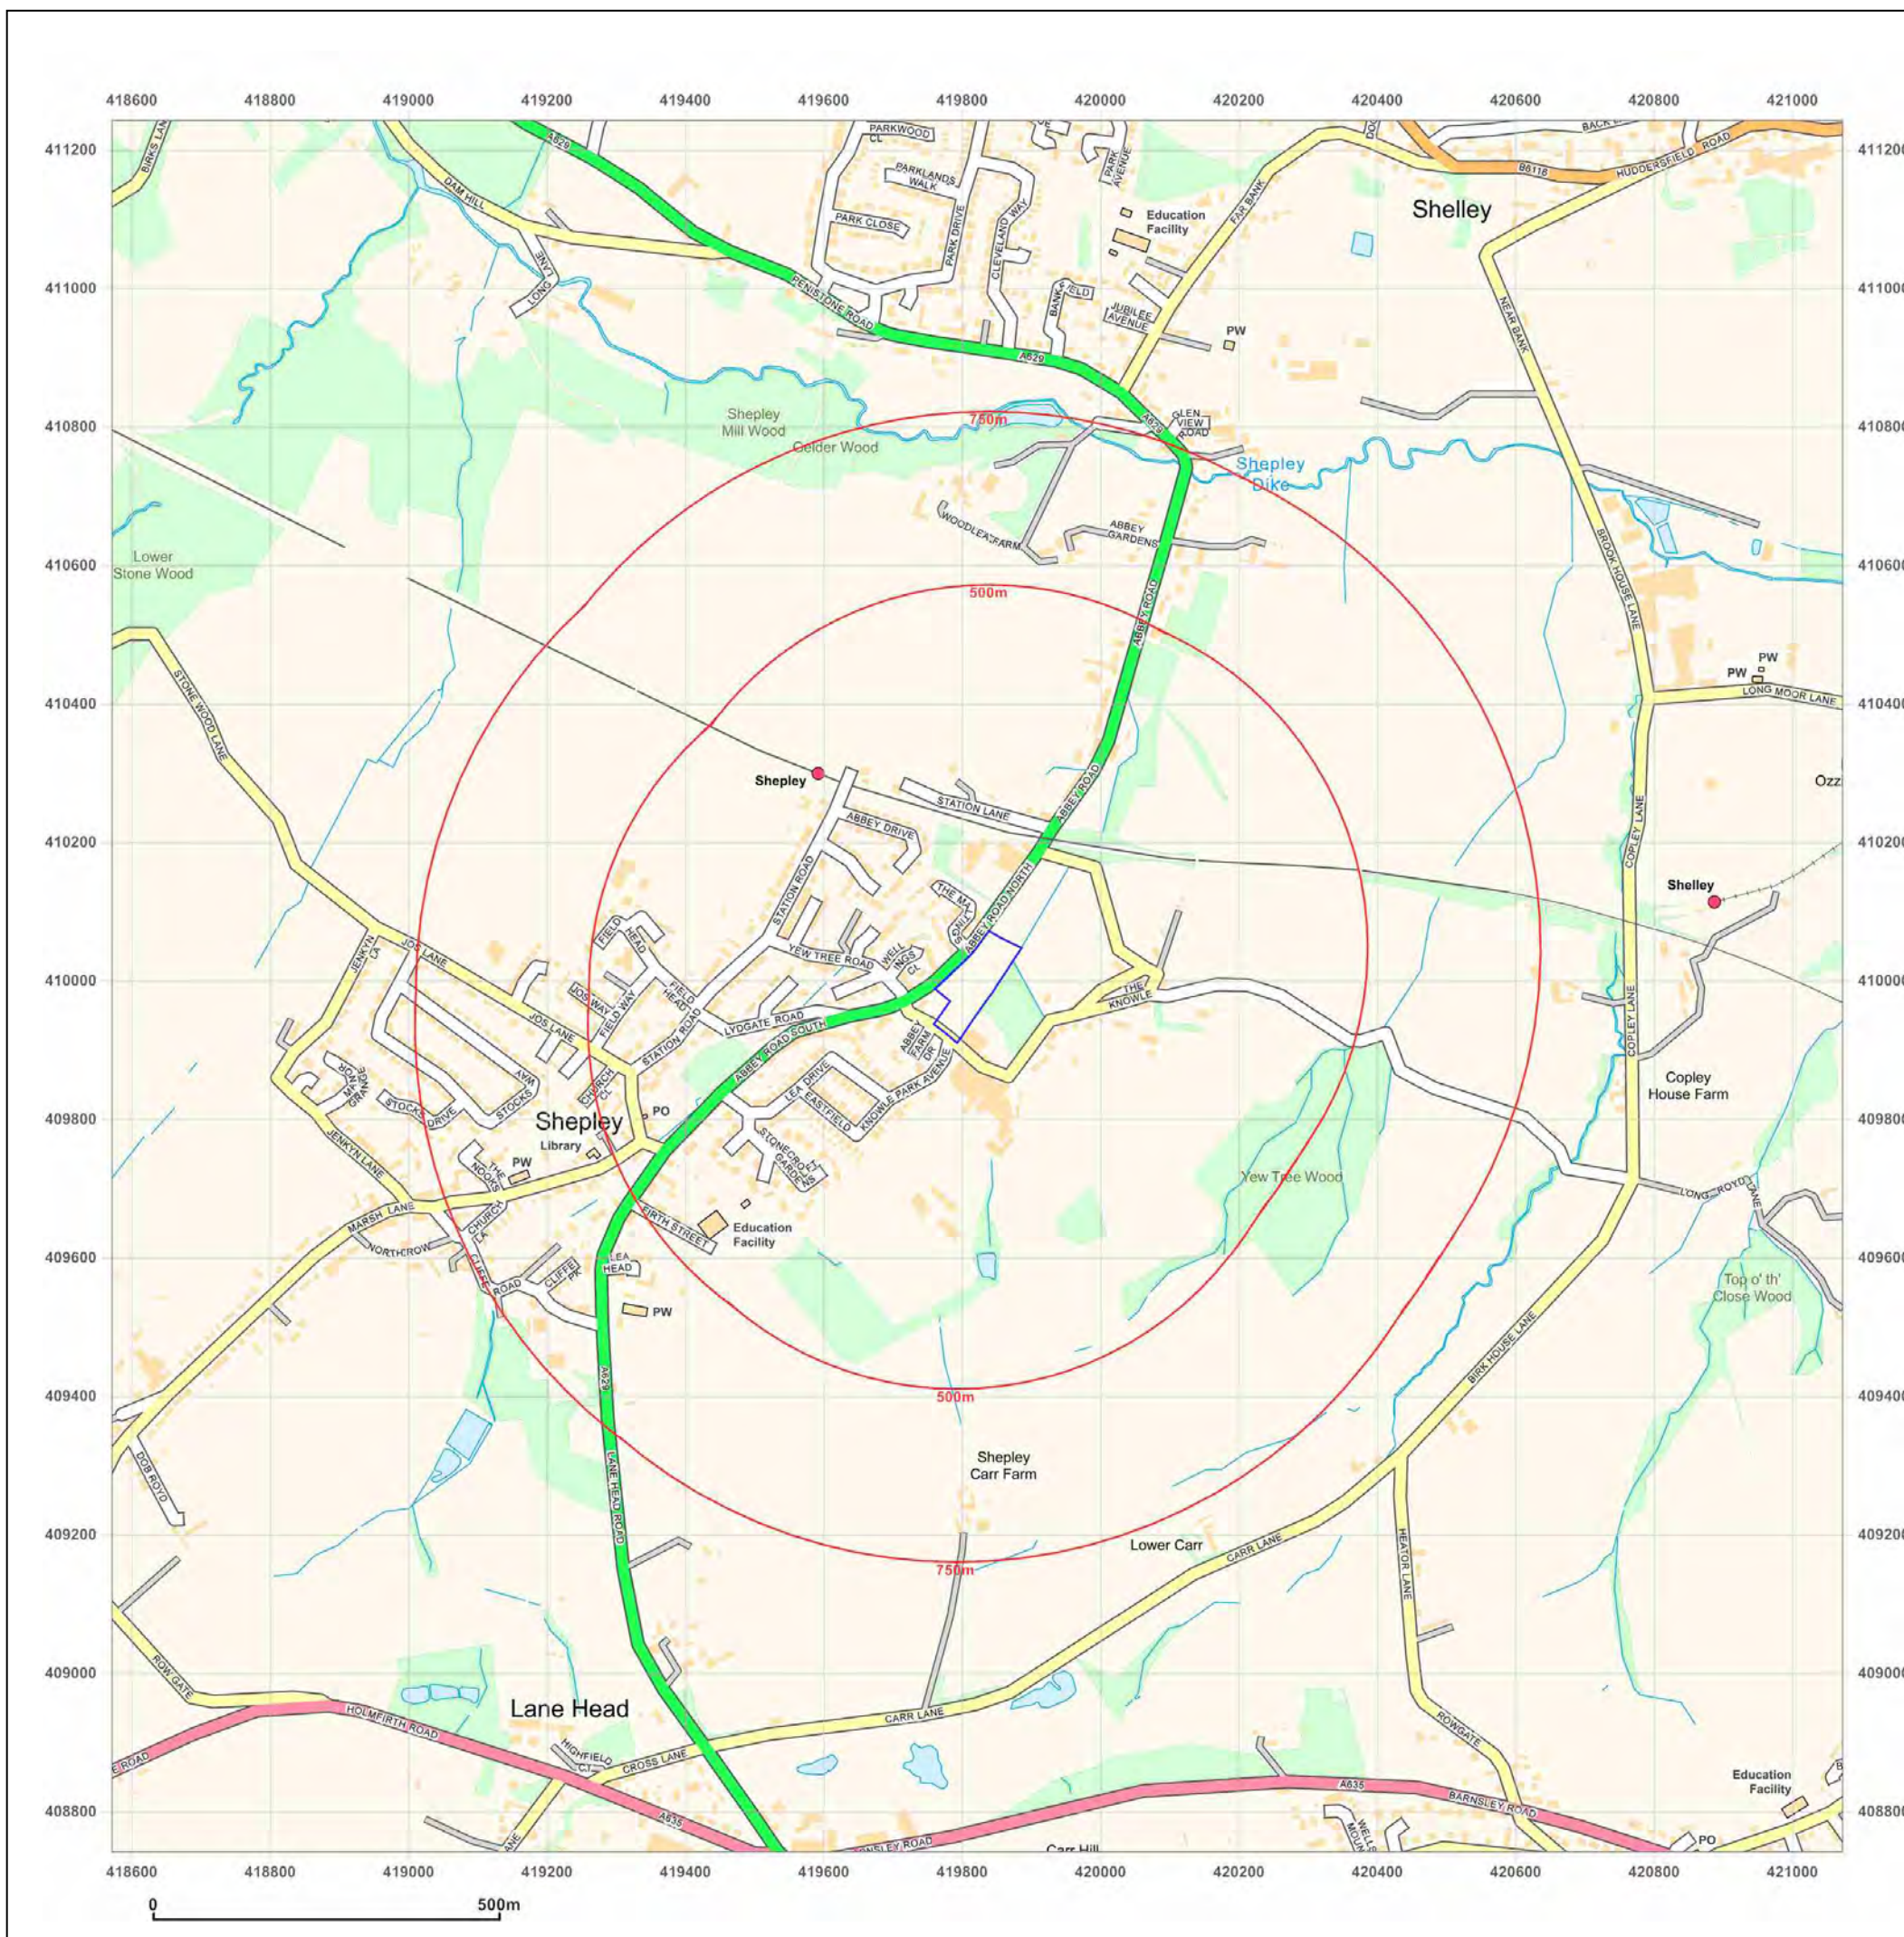

Site Details:

419815, 410001

Client Ref: YORKSHIRE_COUNTRY_PROPERTIES_7465
Report Ref: GS-6047538
Grid Ref: 419822, 409992

Map Name: County Series

Map date: 1906

Scale: 1:2,500

Printed at: 1:2,500



Surveyed 1906
Revised 1906
Edition N/A
Copyright N/A
Levelled N/A





Produced by
Groundsure Insights
T: 08444 159000
E: info@groundsure.com
W: www.groundsure.com

© Crown copyright and database rights 2018 Ordnance Survey 100035207

Production date: 22 May 2019

Map legend available at:
www.groundsure.com/sites/default/files/groundsure_legend.pdf

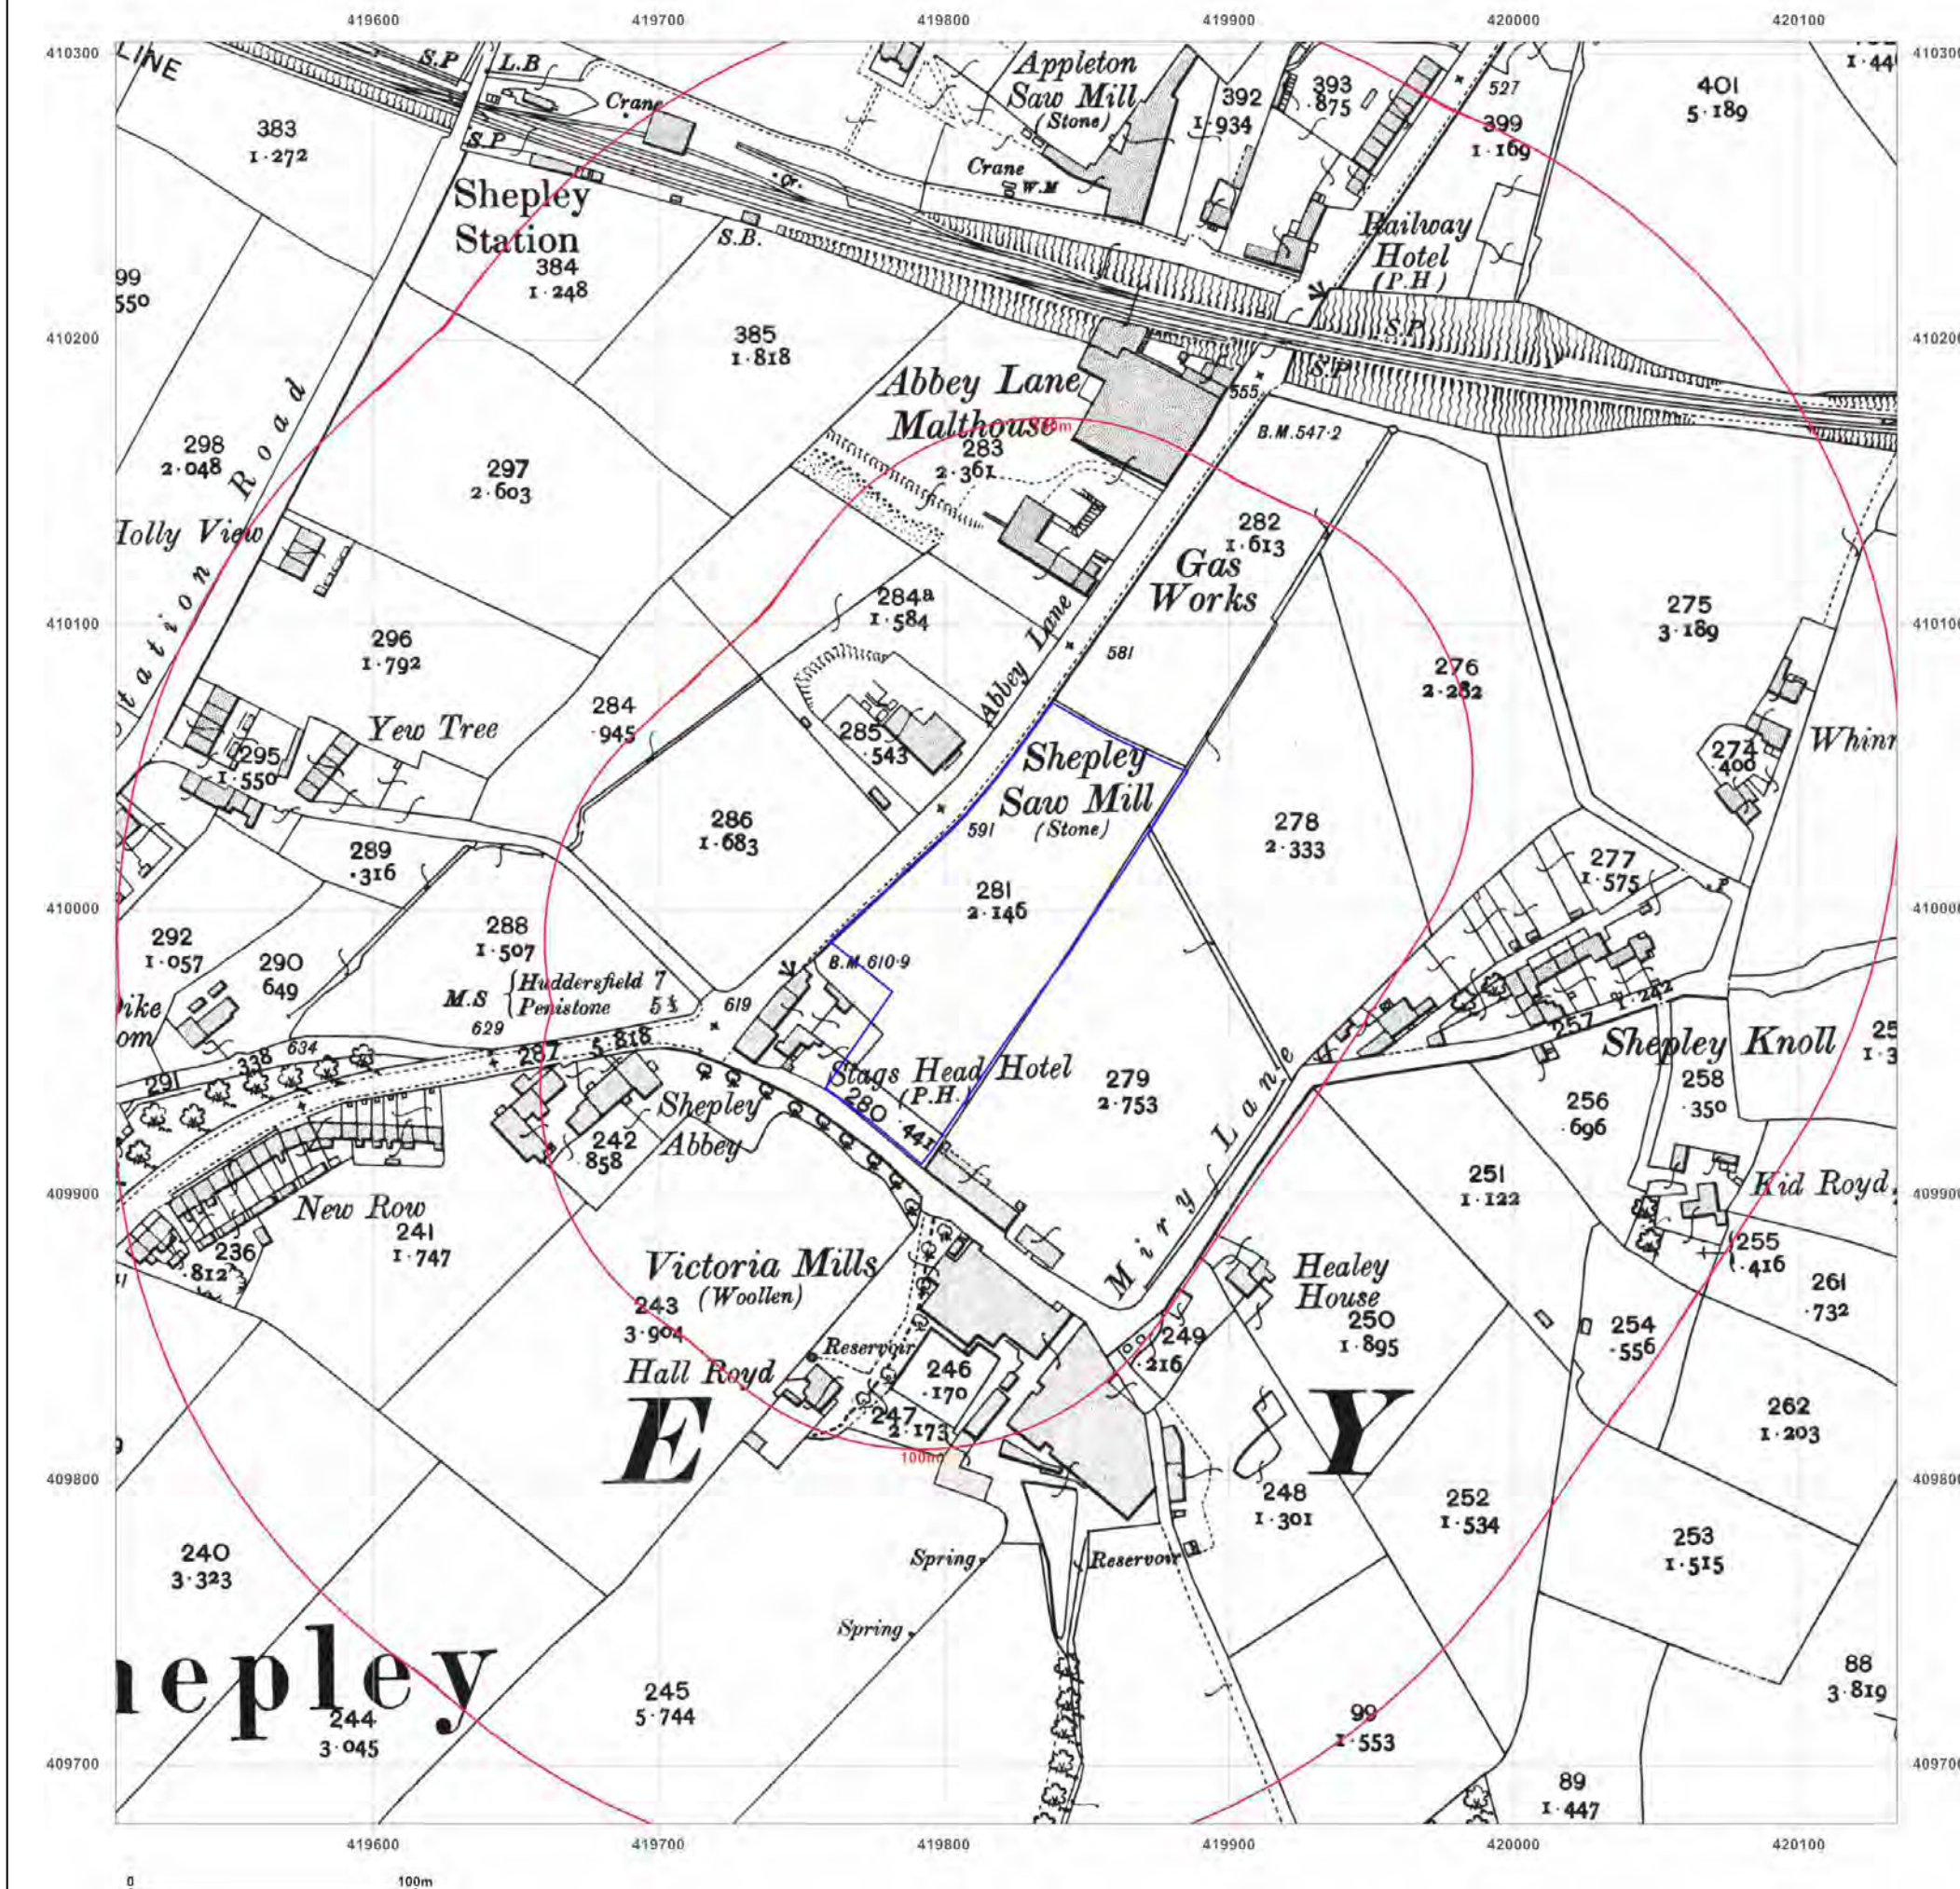

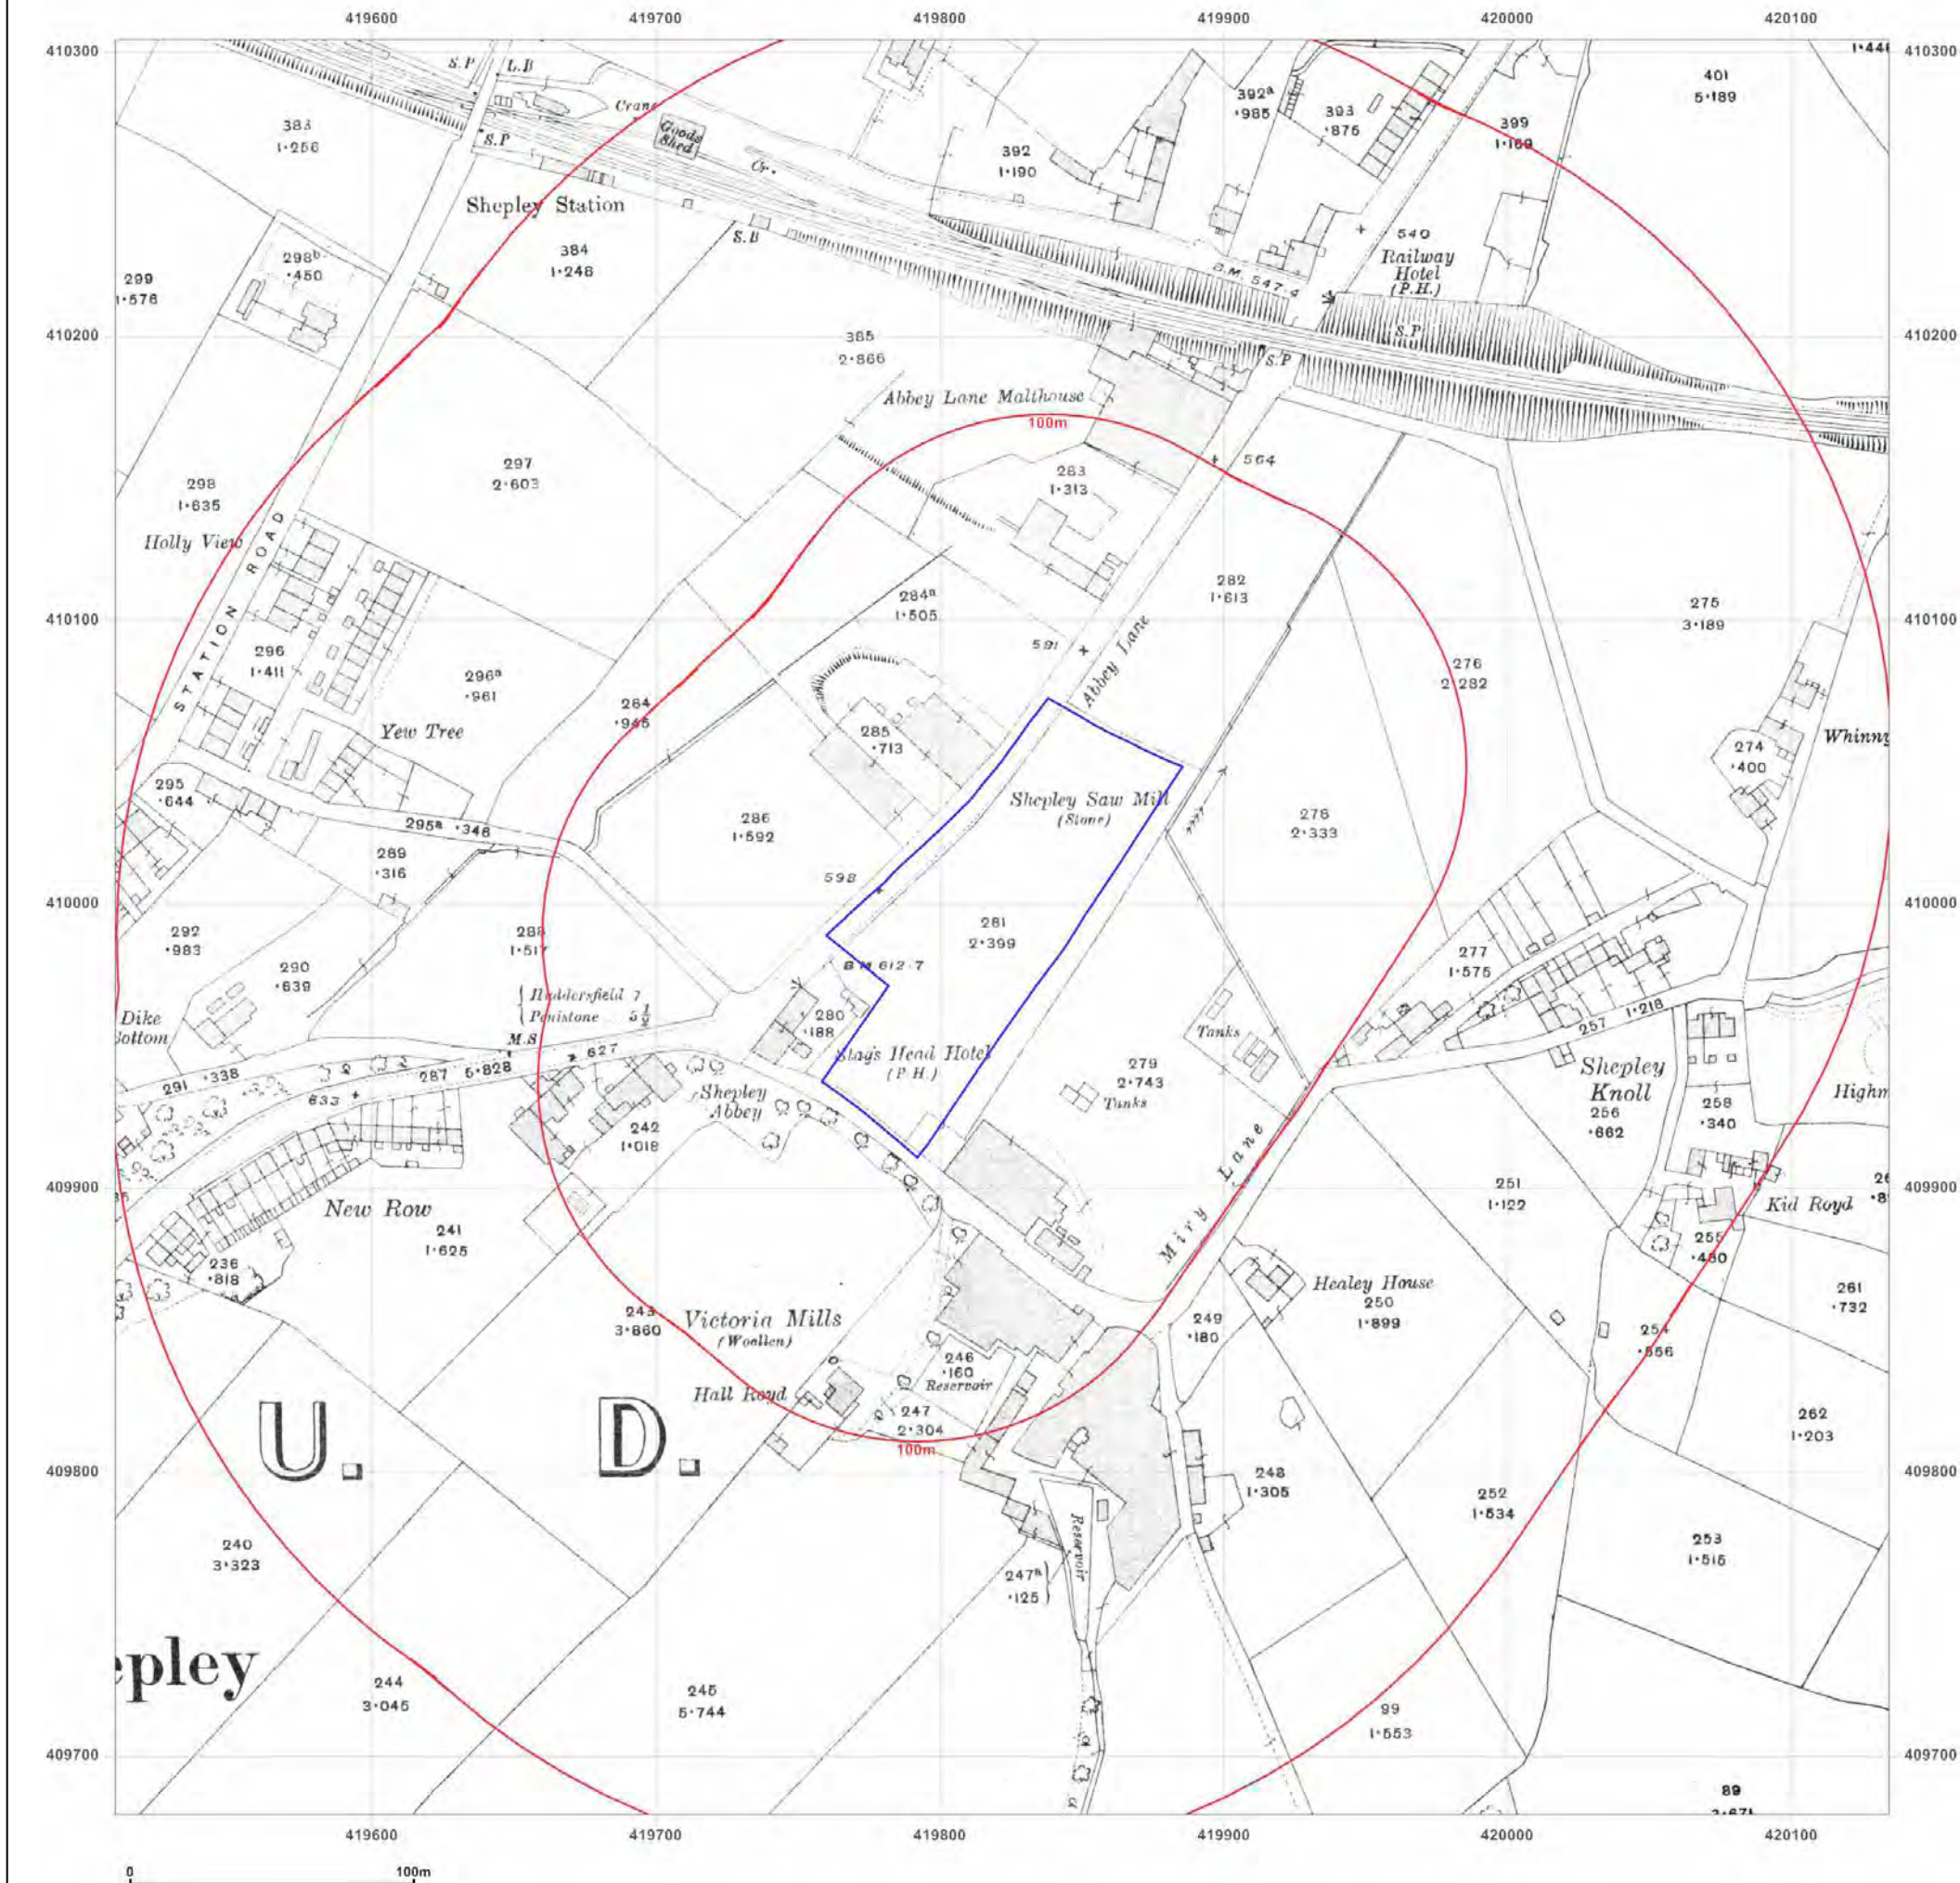

Site Details:

419815, 410001

Client Ref: YORKSHIRE_COUNTRY_PROPERTIES_7465
Report Ref: GS-6047538
Grid Ref: 419822, 409992

Map Name: County Series

Map date: 1913

Scale: 1:2,500

Printed at: 1:2,500



Surveyed 1913
Revised 1913
Edition N/A
Copyright N/A
Levelled N/A



Produced by
Groundsure Insights
T: 08444 159000
E: info@groundsure.com
W: www.groundsure.com

© Crown copyright and database rights 2018 Ordnance Survey 100035207

Production date: 22 May 2019

Map legend available at:
www.groundsure.com/sites/default/files/groundsure_legend.pdf

Site Details:

419815, 410001

Client Ref: YORKSHIRE_COUNTRY_PROPERTIES_7465
Report Ref: GS-6047538
Grid Ref: 419822, 409992

Map Name: National Grid

Map date: 1959

Scale: 1:2,500

Printed at: 1:2,500



Surveyed 1959
 Revised 1959
 Edition N/A
 Copyright 1960
 Levelled 1930

Surveyed 1959
 Revised 1959
 Edition N/A
 Copyright 1960
 Levelled 1930

Surveyed 1959
 Revised 1959
 Edition N/A
 Copyright 1960
 Levelled 1930

Surveyed N/A
 Revised 1959
 Edition 1959
 Copyright 1959
 Levelled 1930




Produced by
 Groundsure Insights
 T: 08444 159000
 E: info@groundsure.com
 W: www.groundsure.com

© Crown copyright and database rights 2018 Ordnance Survey 100035207

Production date: 22 May 2019

Map legend available at:
www.groundsure.com/sites/default/files/groundsure_legend.pdf

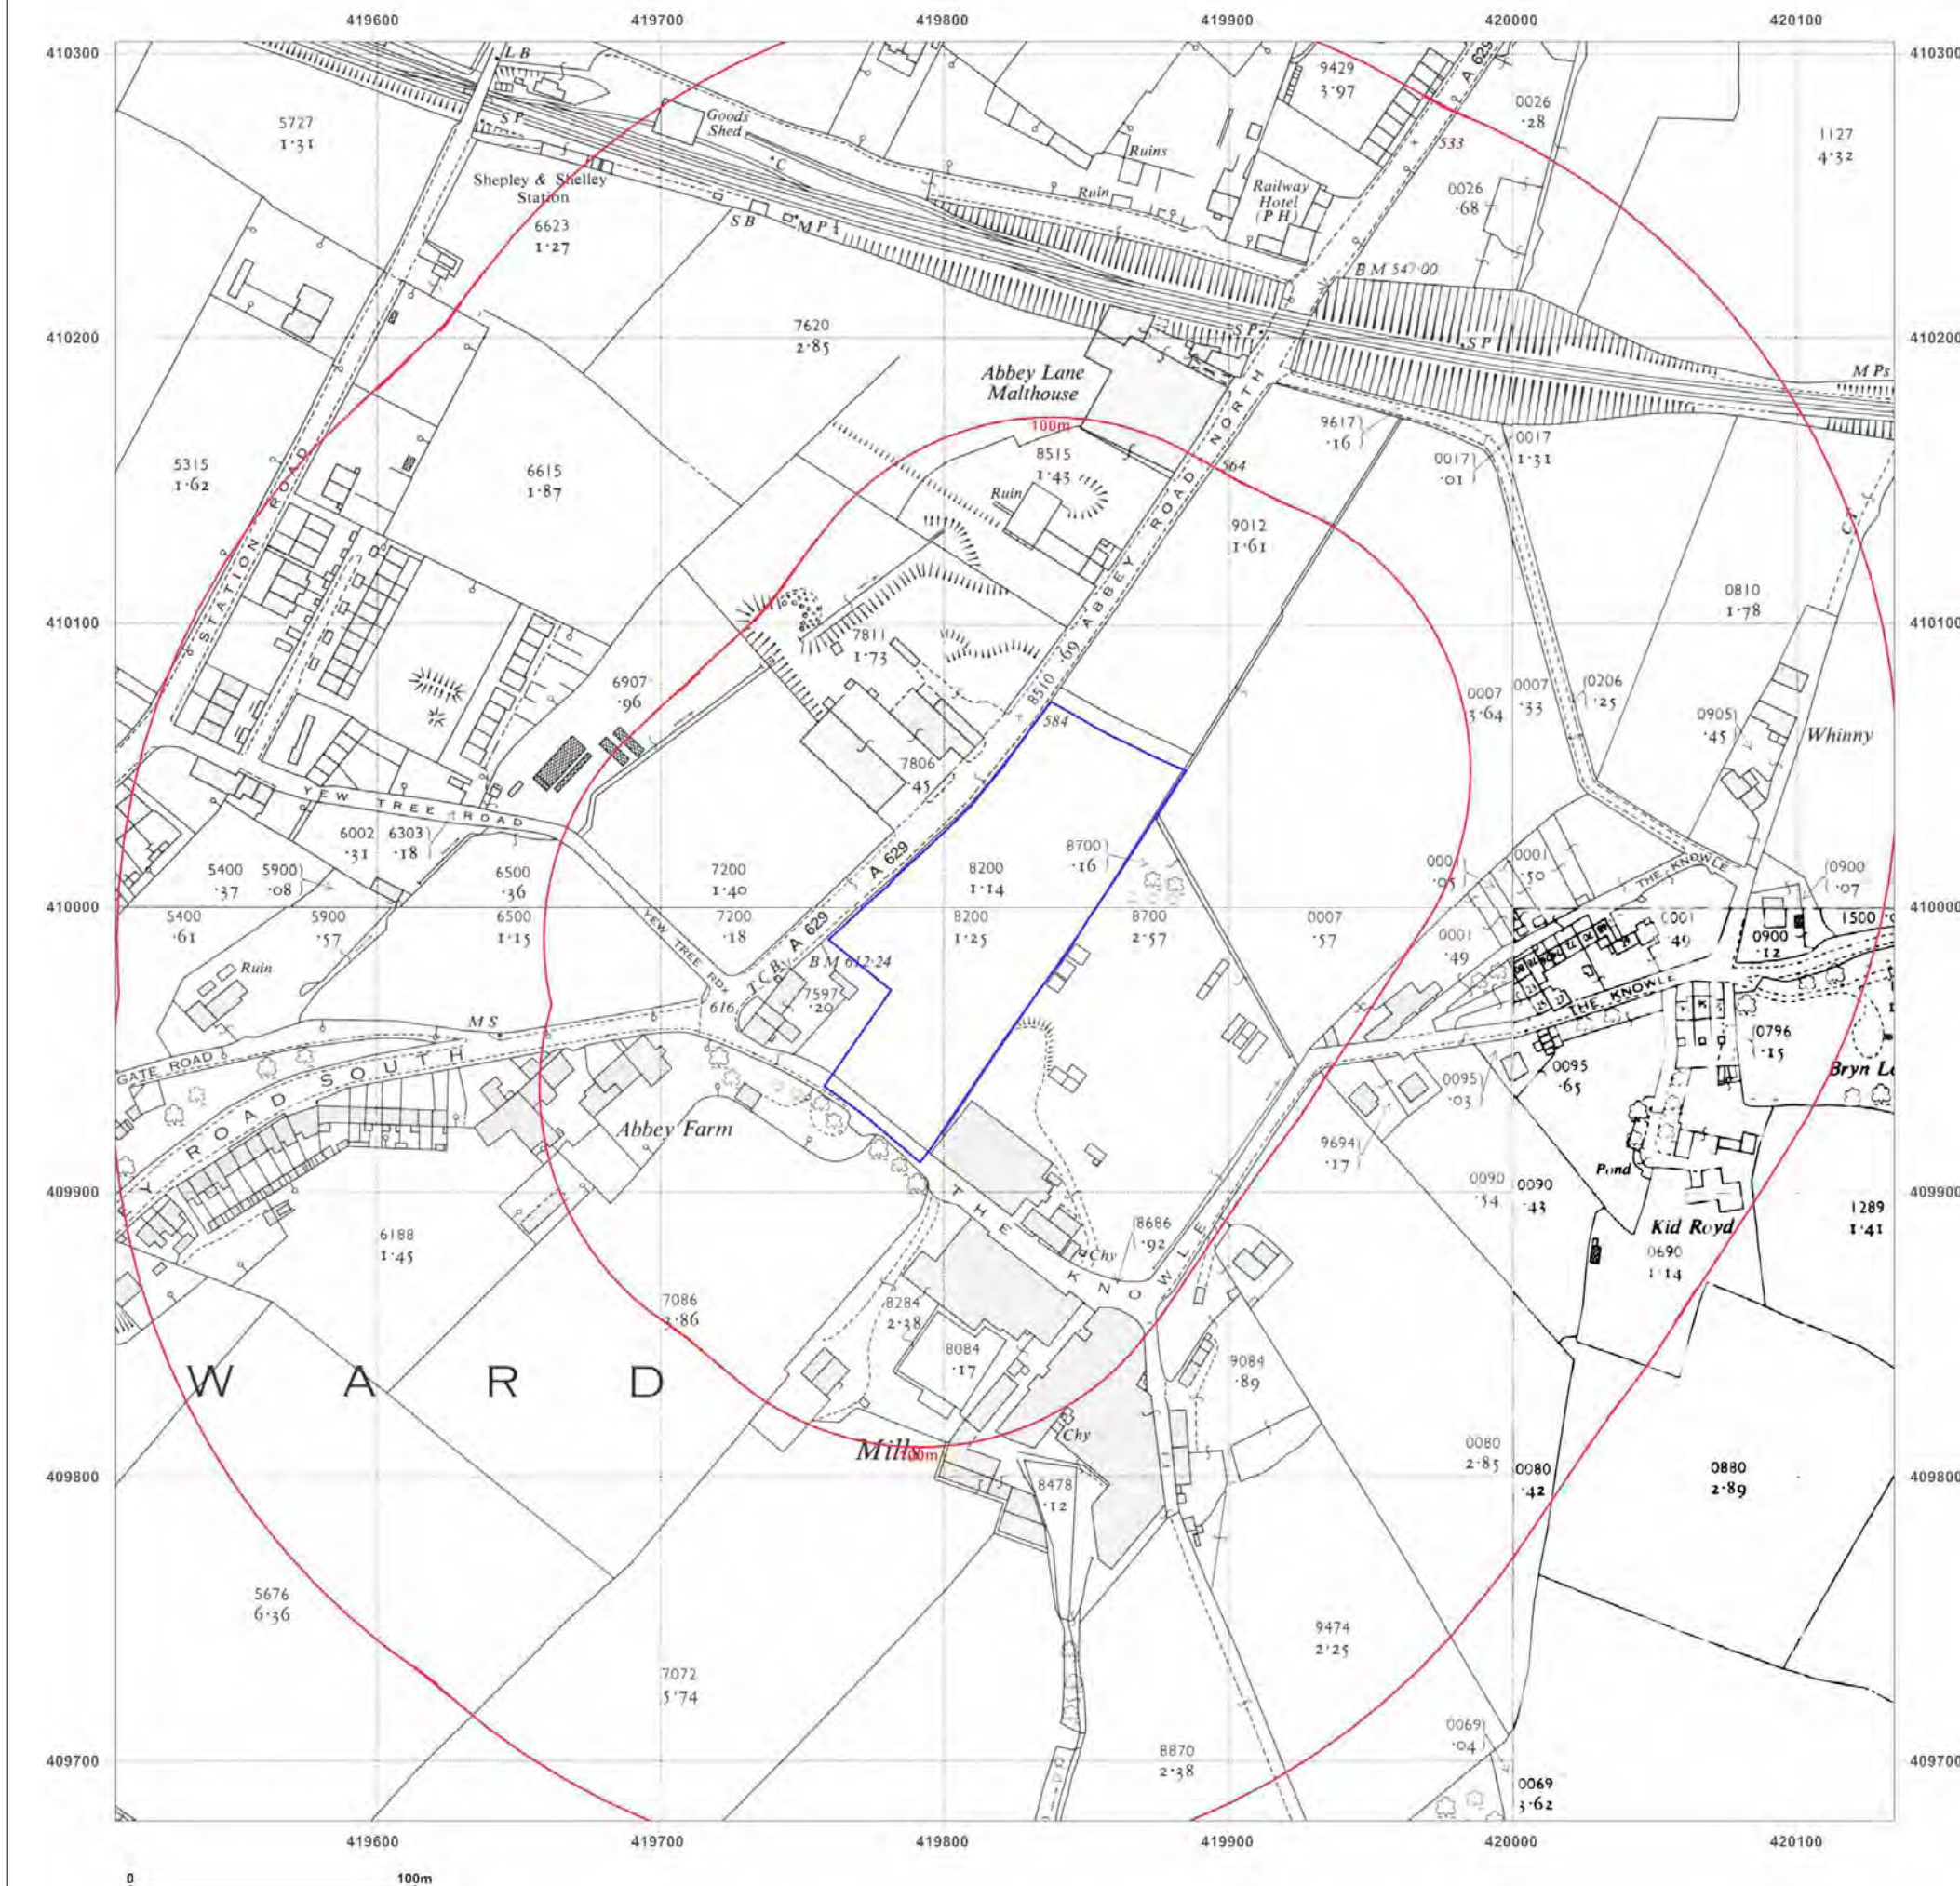

Site Details:

419815, 410001

Client Ref: YORKSHIRE_COUNTRY_PROPERTIES_7465
Report Ref: GS-6047538
Grid Ref: 419822, 409992

Map Name: National Grid


Map date: 1959-1960

Scale: 1:2,500

Printed at: 1:2,500



Surveyed N/A
 Revised N/A
 Edition N/A
 Copyright N/A
 Levelled N/A



Surveyed 1959
 Revised 1959
 Edition N/A
 Copyright 1959
 Levelled 1930



Produced by
 Groundsure Insights
 T: 08444 159000
 E: info@groundsure.com
 W: www.groundsure.com

© Crown copyright and database rights 2018 Ordnance Survey 100035207

Production date: 22 May 2019

Map legend available at:
www.groundsure.com/sites/default/files/groundsure_legend.pdf



Site Details:

419815, 410001

Client Ref: YORKSHIRE_COUNTRY_PROPERTIES_7465
Report Ref: GS-6047538
Grid Ref: 419822, 409992

Map Name: National Grid

Map date: 1968

Scale: 1:2,500

Printed at: 1:2,500



Surveyed 1968
 Revised 1968
 Edition N/A
 Copyright 1969
 Levelled 1959




Produced by
 Groundsure Insights
 T: 08444 159000
 E: info@groundsure.com
 W: www.groundsure.com

© Crown copyright and database rights 2018 Ordnance Survey 100035207

Production date: 22 May 2019

Map legend available at:
www.groundsure.com/sites/default/files/groundsure_legend.pdf

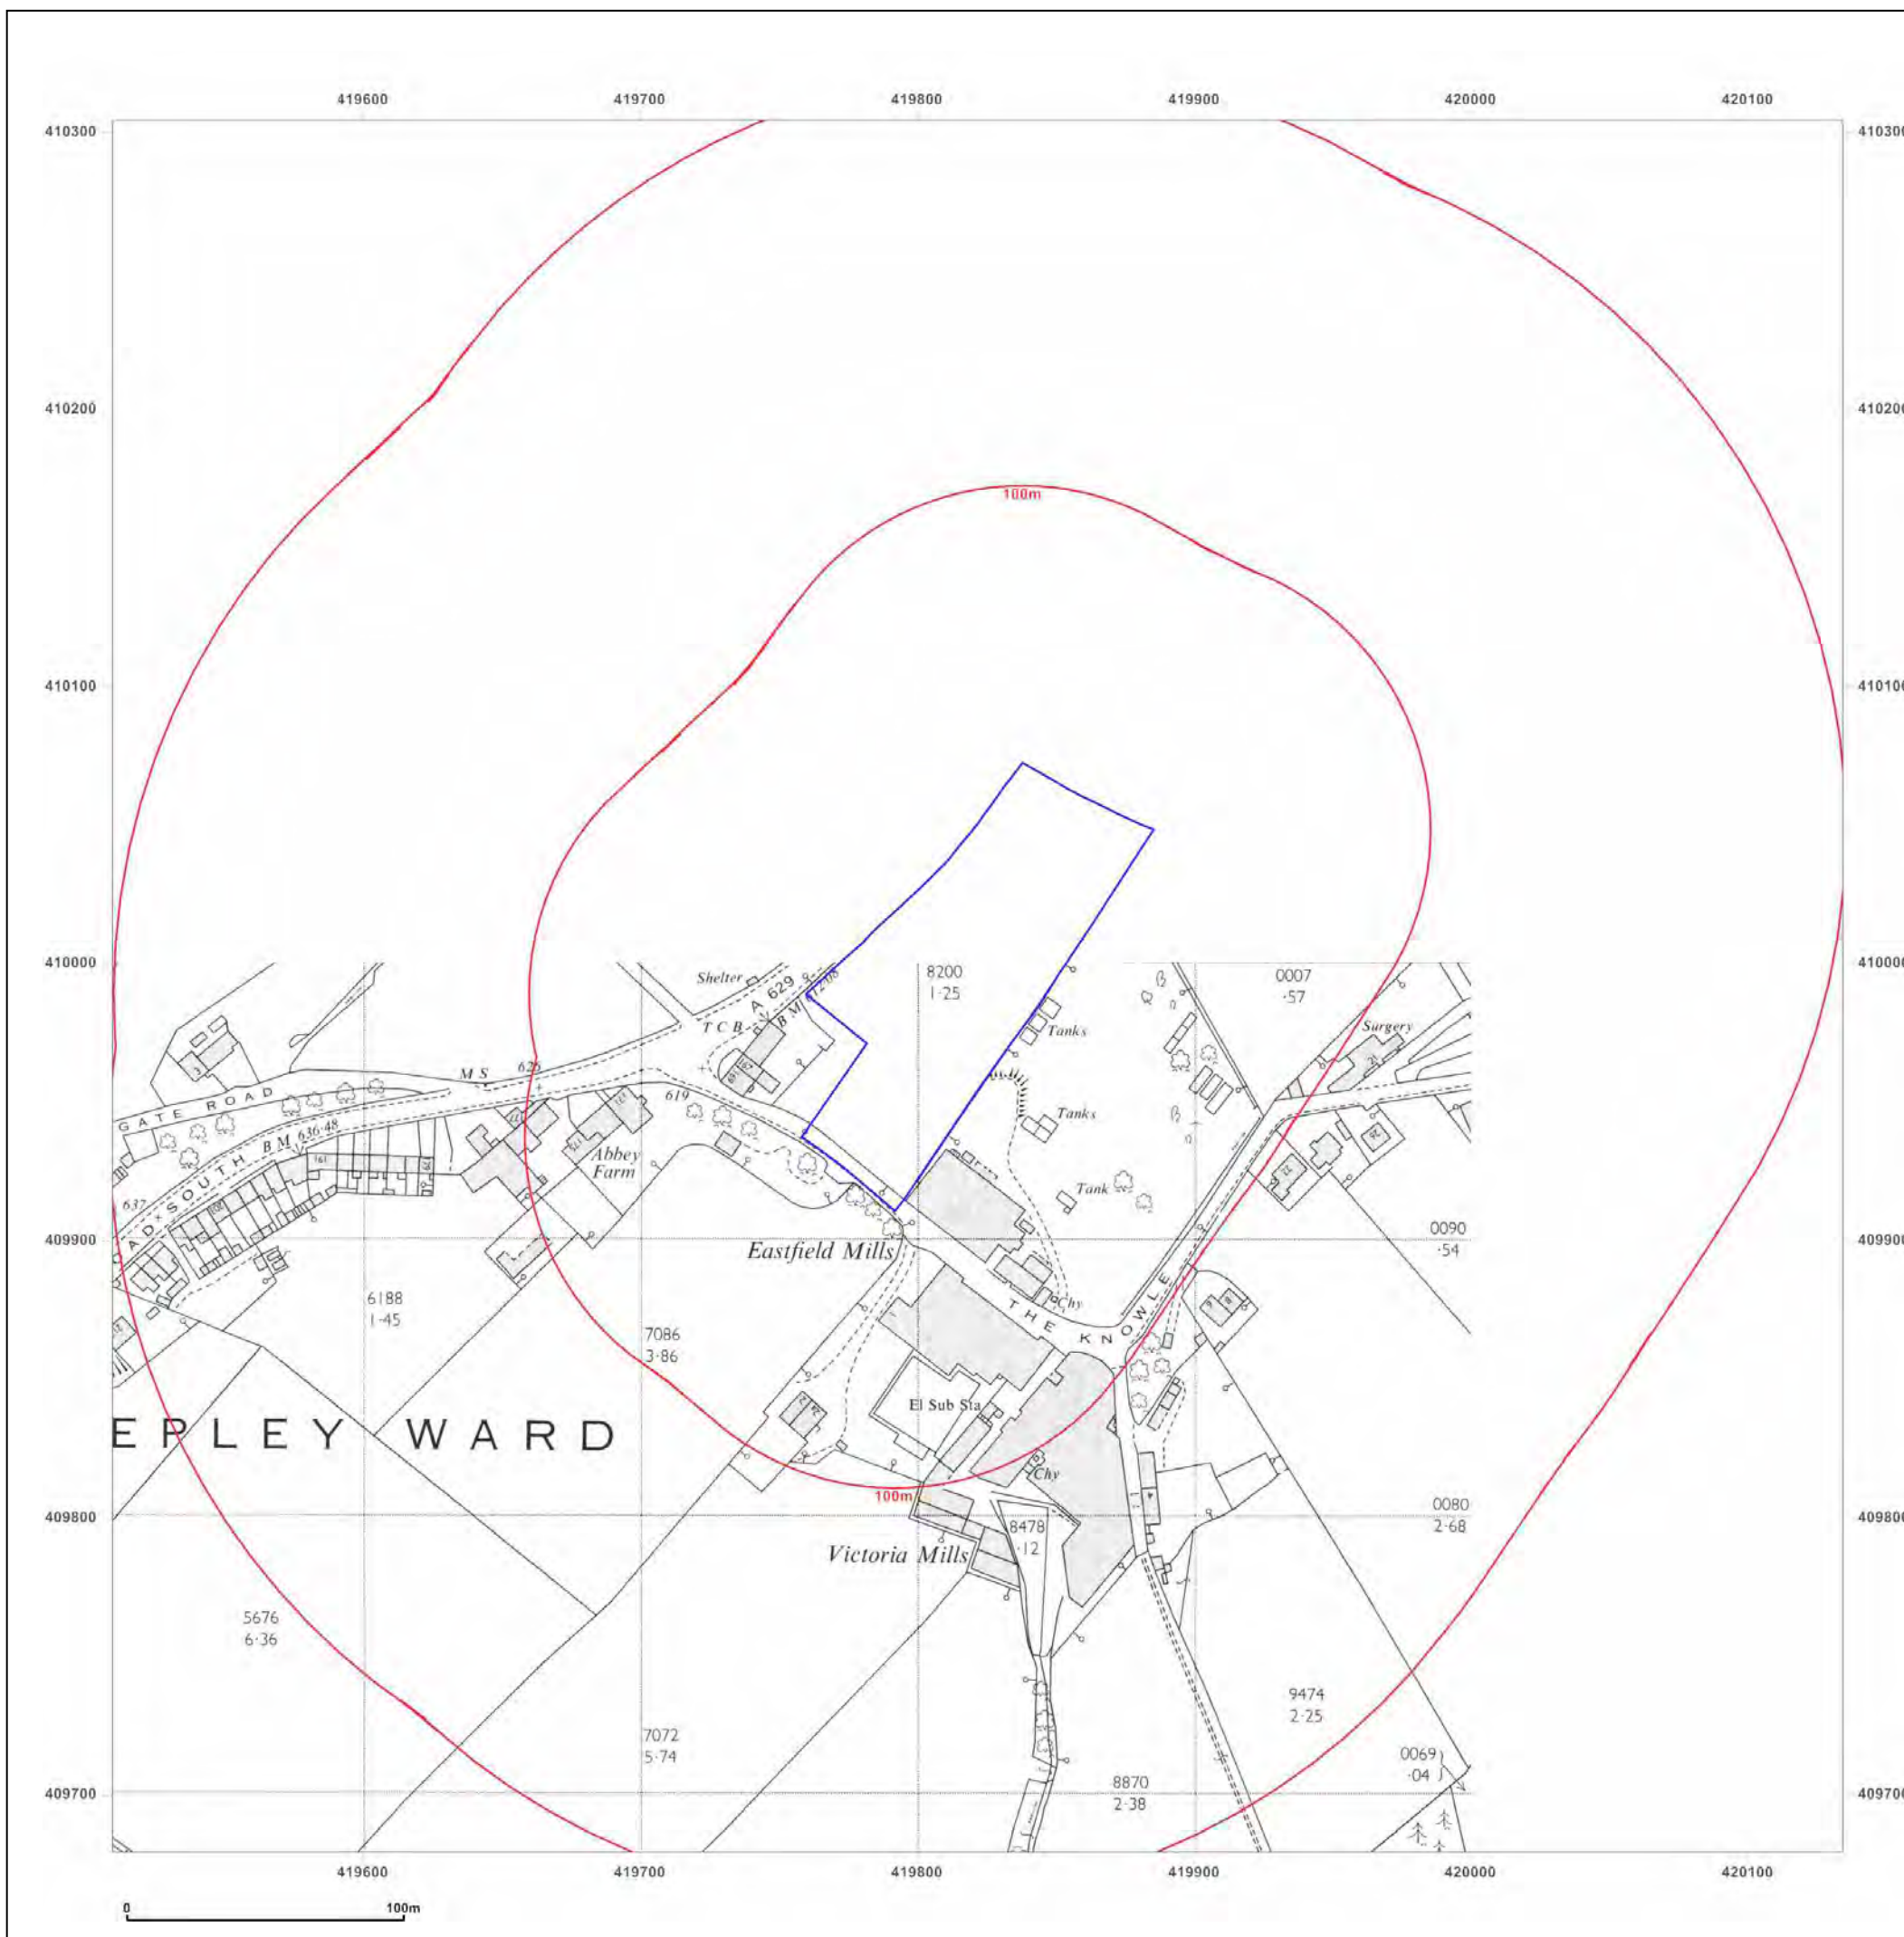

Site Details:

419815, 410001

Client Ref: YORKSHIRE_COUNTRY_PROPERTIES_7465
Report Ref: GS-6047538
Grid Ref: 419822, 409992

Map Name: National Grid

Map date: 1969

Scale: 1:2,500

Printed at: 1:2,500



Surveyed N/A
 Revised N/A
 Edition N/A
 Copyright N/A
 Levelled N/A



Produced by
 Groundsure Insights
 T: 08444 159000
 E: info@groundsure.com
 W: www.groundsure.com

© Crown copyright and database rights 2018 Ordnance Survey 100035207

Production date: 22 May 2019

Map legend available at:
www.groundsure.com/sites/default/files/groundsure_legend.pdf



Site Details:

419815, 410001

Client Ref: YORKSHIRE_COUNTRY_PROPERTIES_7465
Report Ref: GS-6047538
Grid Ref: 419822, 409992

Map Name: National Grid


Map date: 1975

Scale: 1:2,500

Printed at: 1:2,500



Surveyed 1975
 Revised 1975
 Edition N/A
 Copyright 1976
 Levelled 1959

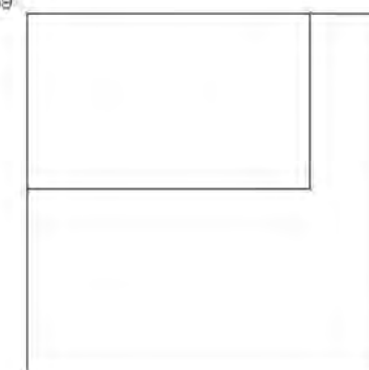


Produced by
 Groundsure Insights
 T: 08444 159000
 E: info@groundsure.com
 W: www.groundsure.com

© Crown copyright and database rights 2018 Ordnance Survey 100035207

Production date: 22 May 2019

Map legend available at:
www.groundsure.com/sites/default/files/groundsure_legend.pdf

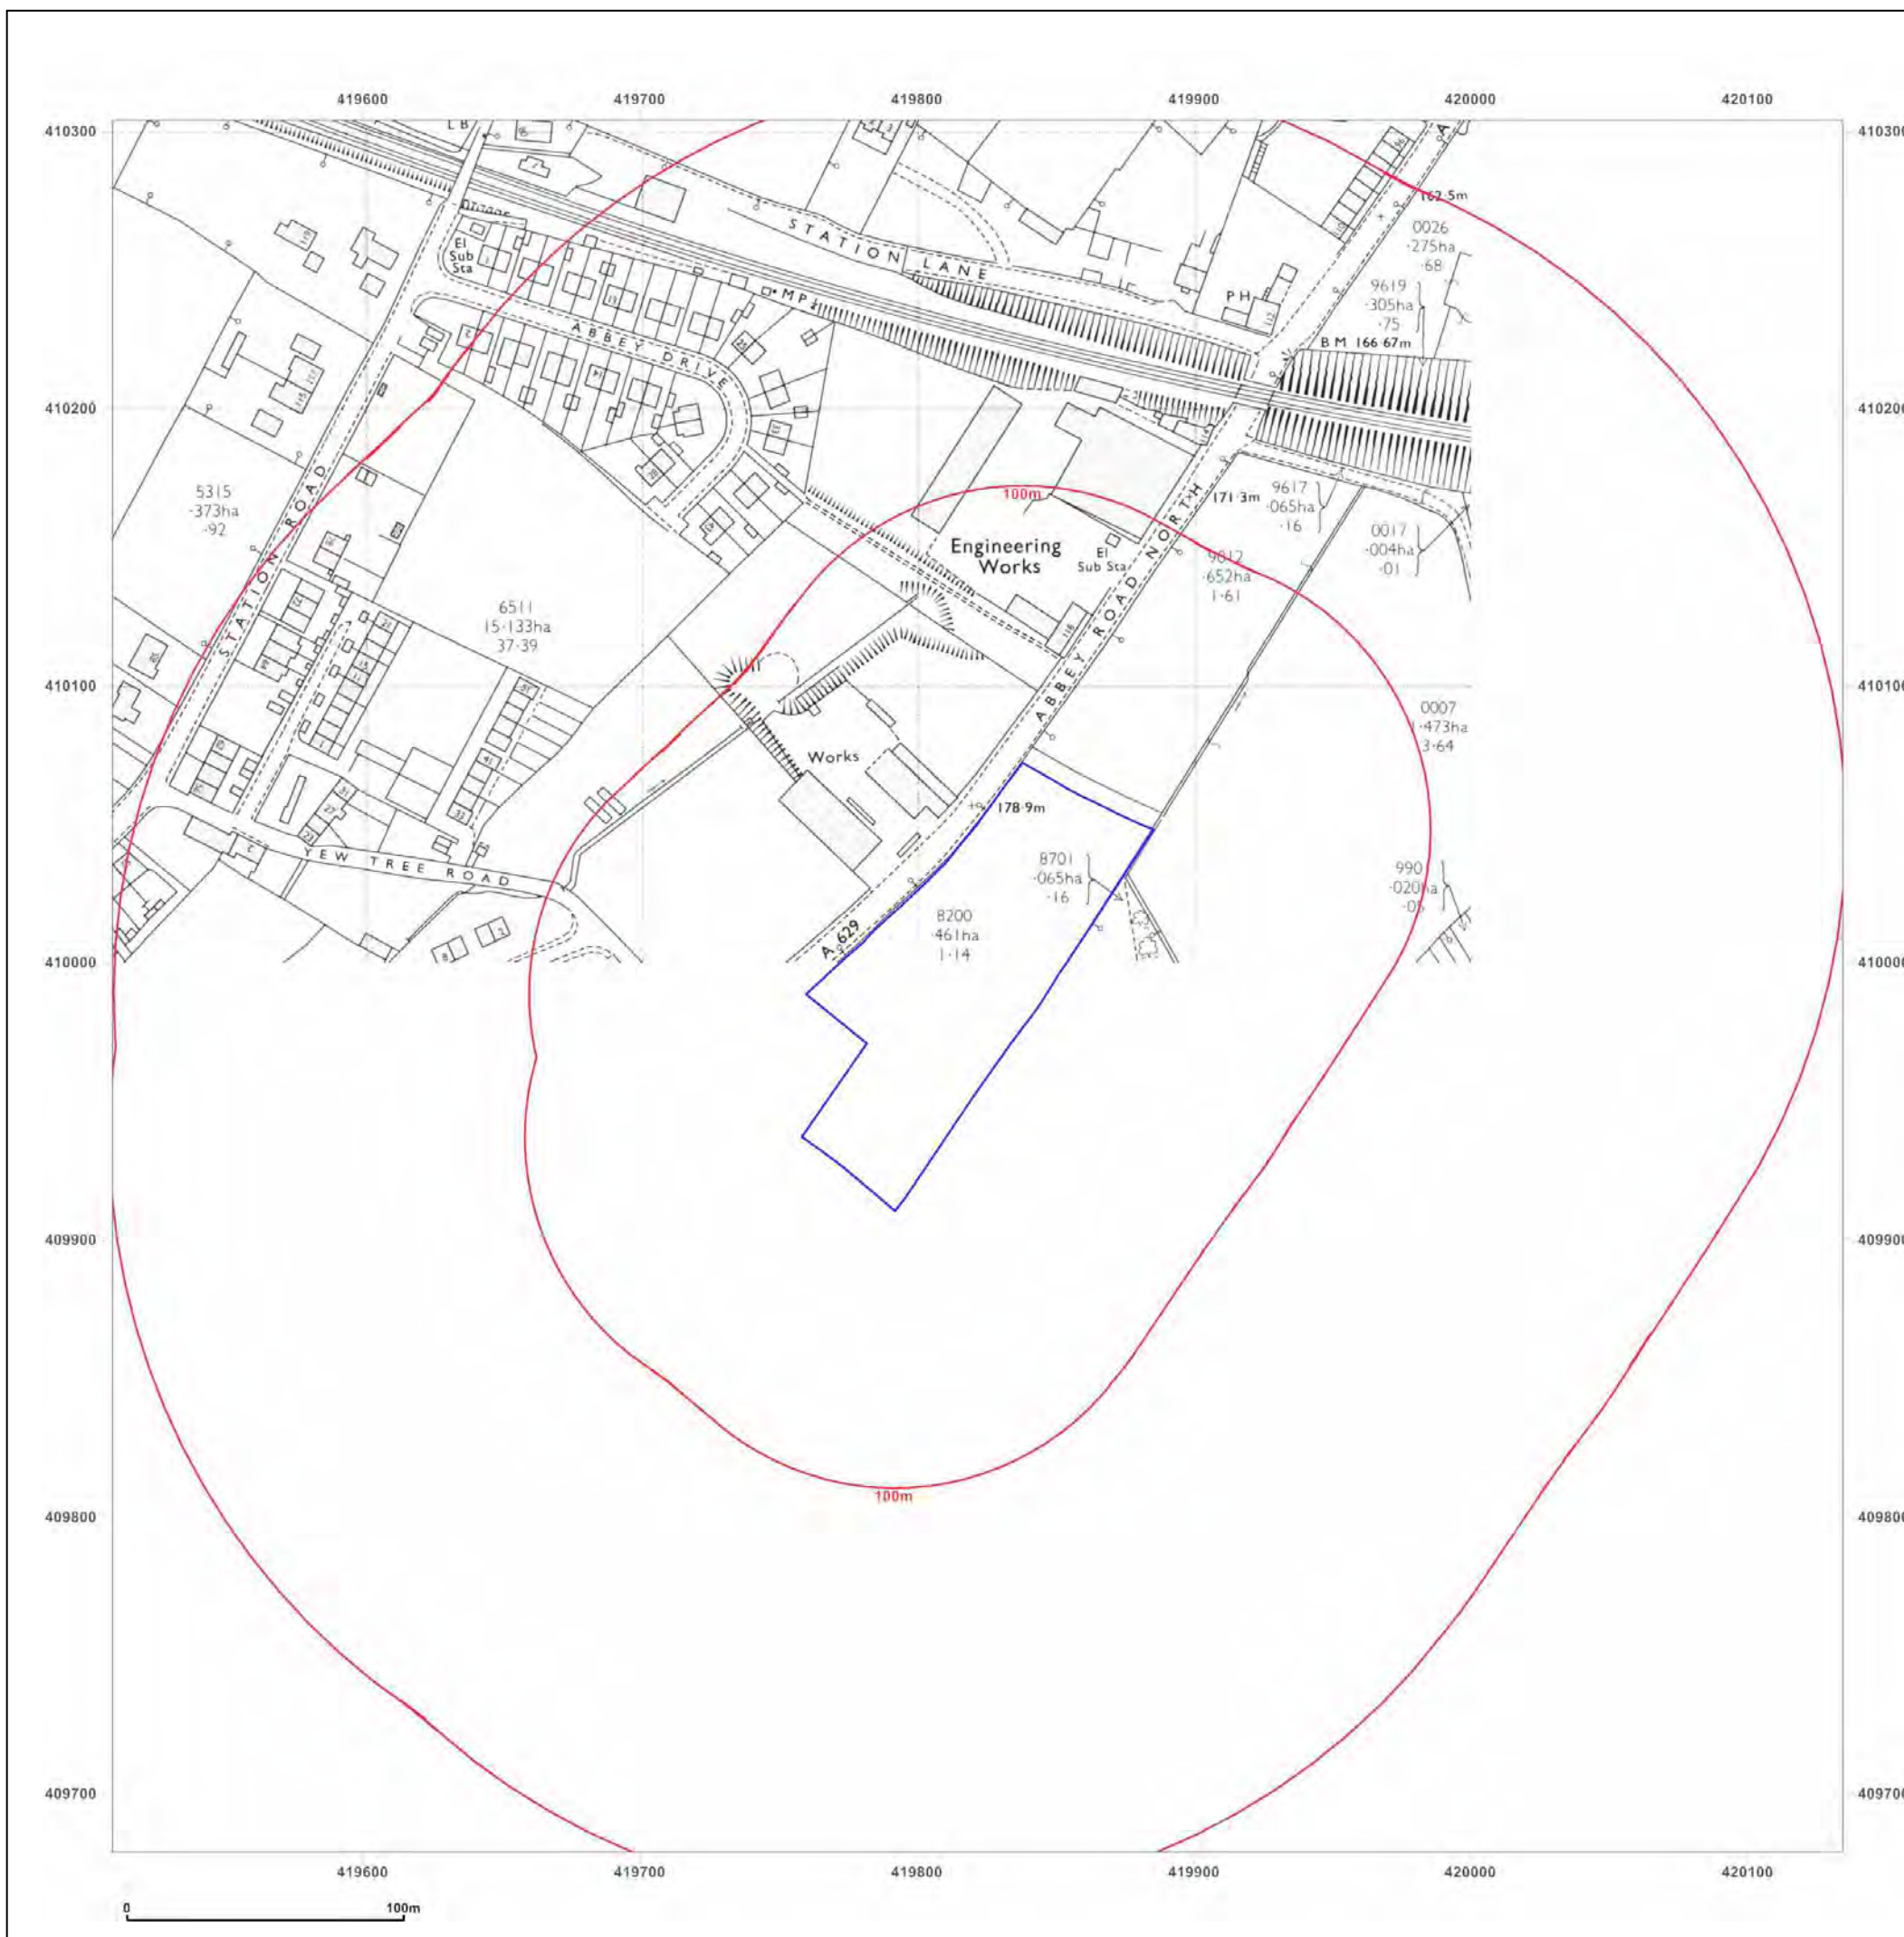

Site Details:

419815, 410001

Client Ref: YORKSHIRE_COUNTRY_PROPERTIES_7465
Report Ref: GS-6047538
Grid Ref: 419822, 409992

Map Name: National Grid

Map date: 1975-1976


Scale: 1:2,500

Printed at: 1:2,500



Surveyed N/A
 Revised N/A
 Edition N/A
 Copyright N/A
 Levelled N/A

Surveyed 1976
 Revised 1976
 Edition N/A
 Copyright 1977
 Levelled 1958



Produced by
 Groundsure Insights
 T: 08444 159000
 E: info@groundsure.com
 W: www.groundsure.com

© Crown copyright and database rights 2018 Ordnance Survey 100035207

Production date: 22 May 2019

Map legend available at:
www.groundsure.com/sites/default/files/groundsure_legend.pdf



Site Details:

419815, 410001

Client Ref: YORKSHIRE_COUNTRY_PROPERTIES_7465
Report Ref: GS-6047538
Grid Ref: 419822, 409992

Map Name: National Grid


Map date: 1976

Scale: 1:2,500

Printed at: 1:2,500



Surveyed N/A
 Revised N/A
 Edition N/A
 Copyright N/A
 Levelled N/A




Produced by
 Groundsure Insights
 T: 08444 159000
 E: info@groundsure.com
 W: www.groundsure.com

© Crown copyright and database rights 2018 Ordnance Survey 100035207

Production date: 22 May 2019

Map legend available at:
www.groundsure.com/sites/default/files/groundsure_legend.pdf

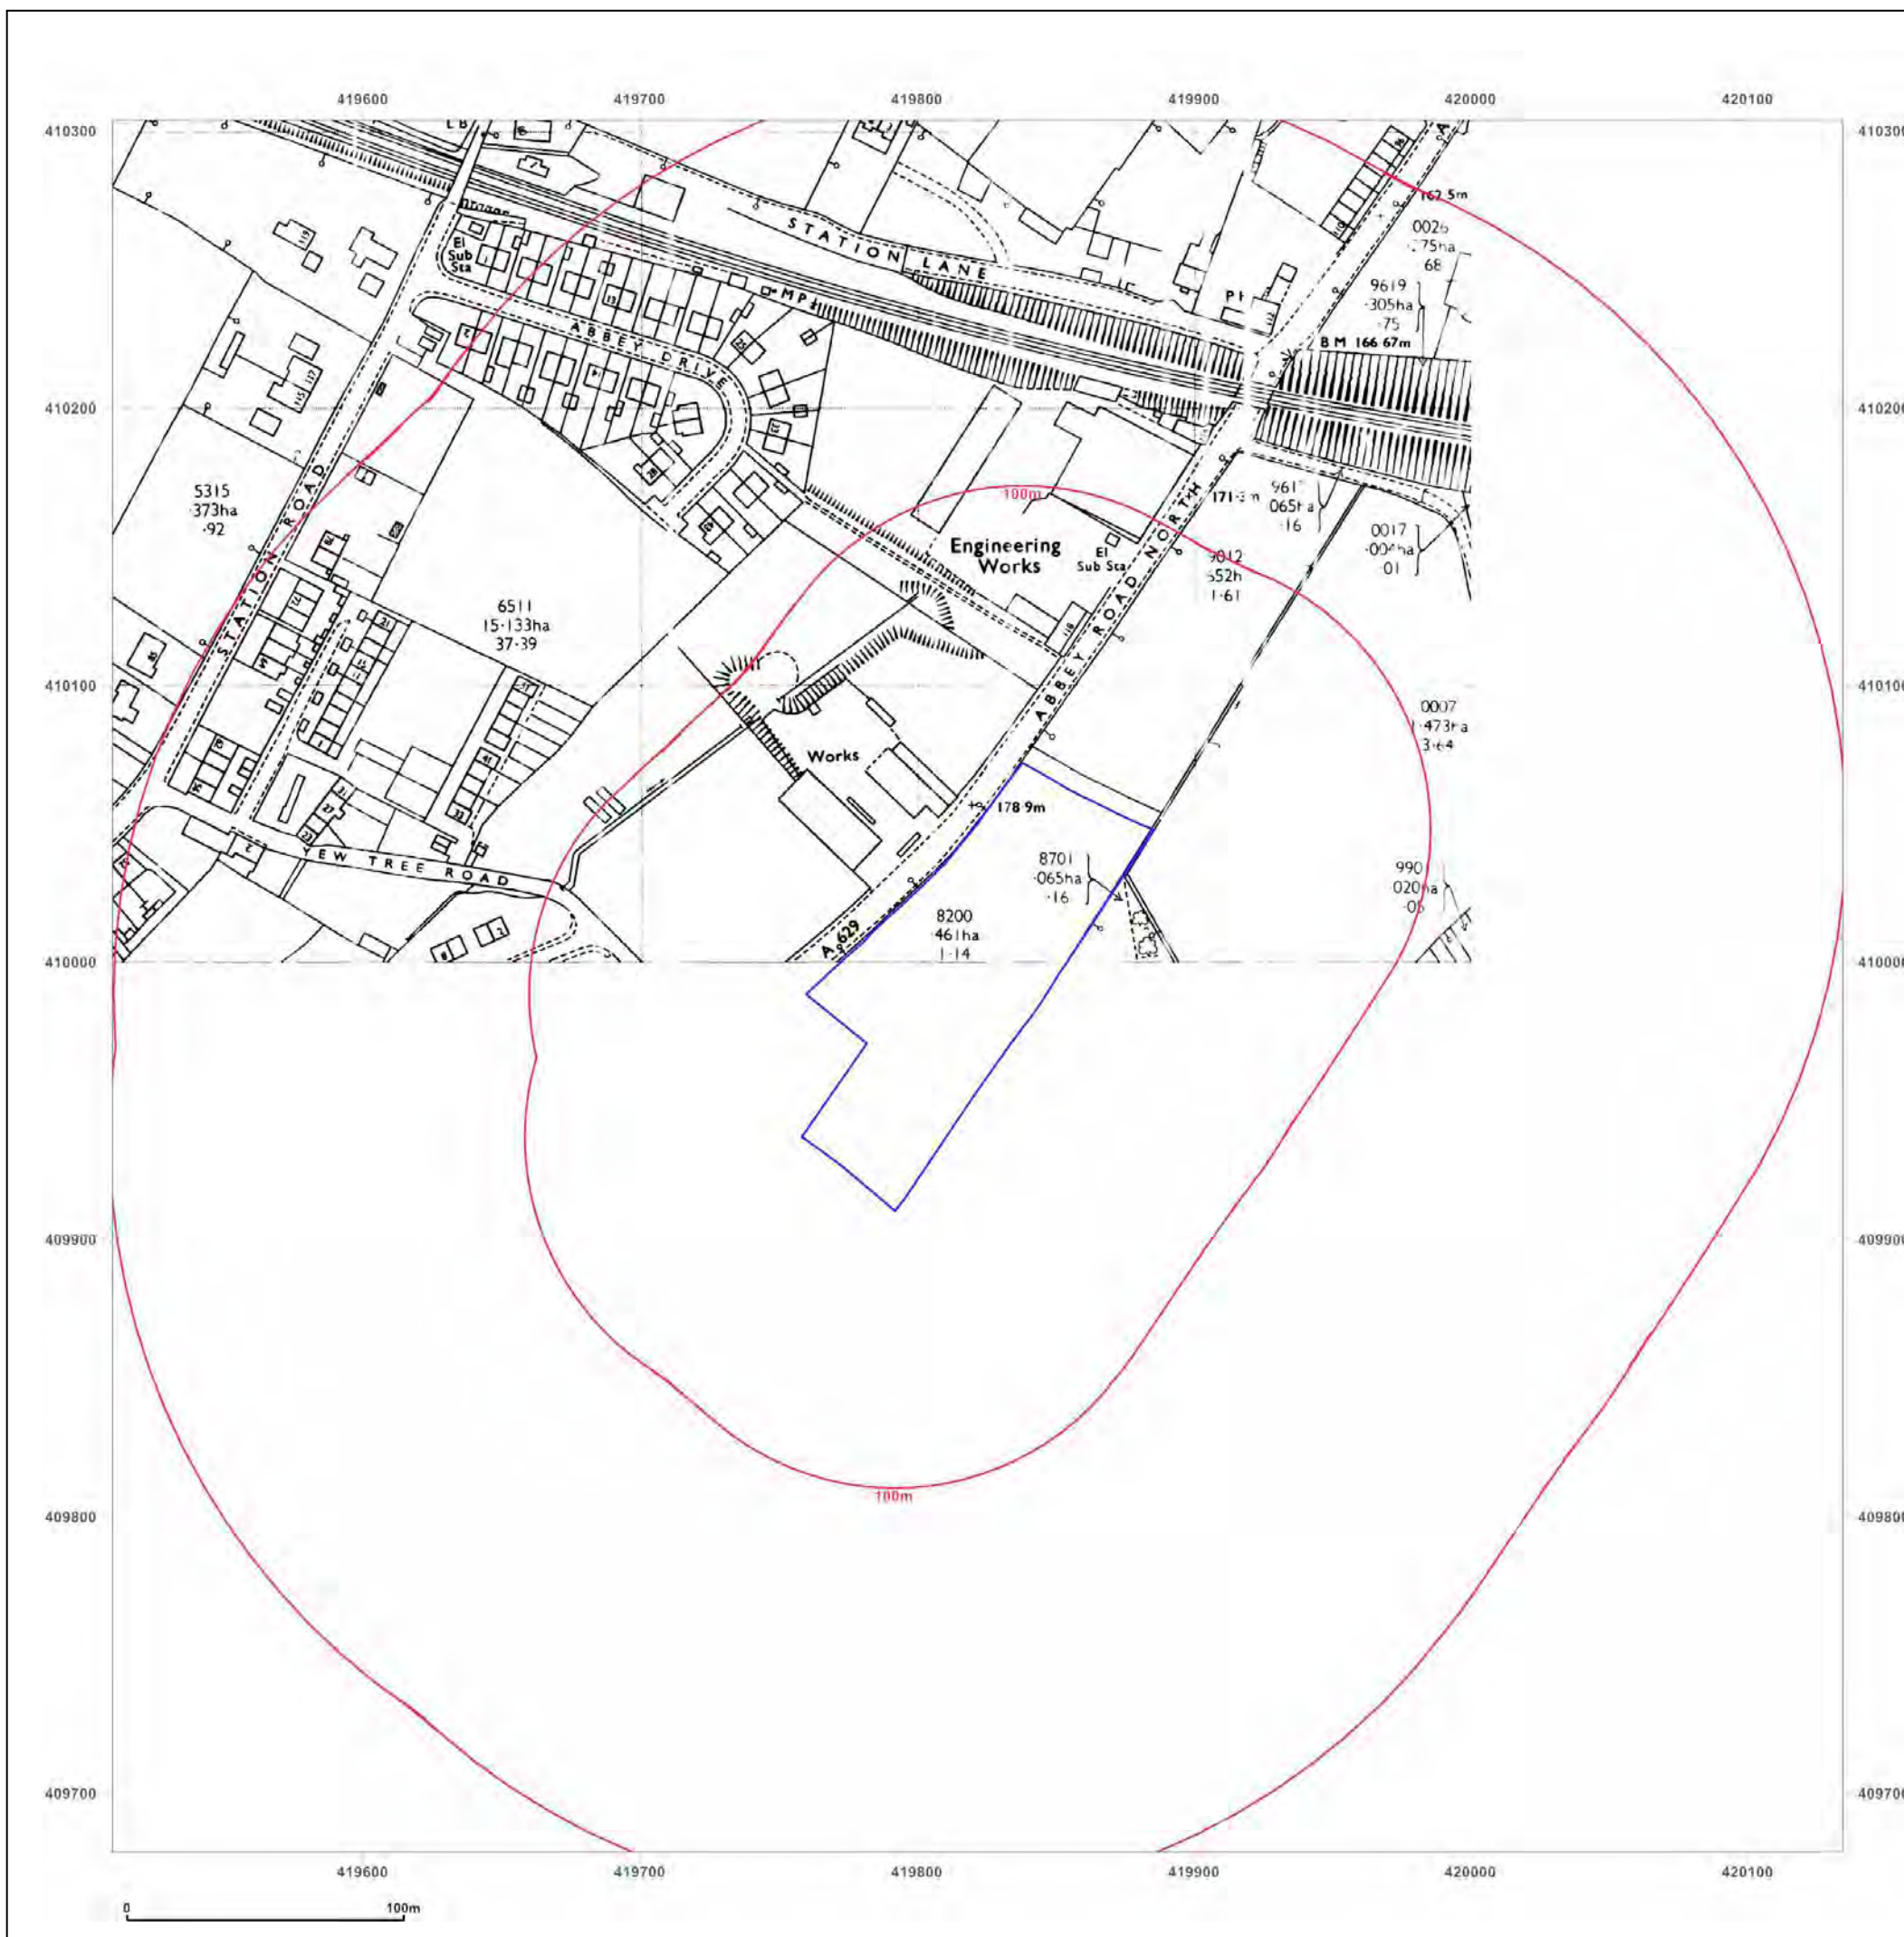

Site Details:

419815, 410001

Client Ref: YORKSHIRE_COUNTRY_PROPERTIES_7465
Report Ref: GS-6047538
Grid Ref: 419822, 409992

Map Name: National Grid

Map date: 1984-1987

Scale: 1:2,500

Printed at: 1:2,500



Surveyed 1959
 Revised 1987
 Edition N/A
 Copyright 1987
 Levelled 1959

Surveyed 1985
 Revised 1985
 Edition N/A
 Copyright 1987
 Levelled 1958

Surveyed 1959
 Revised 1984
 Edition N/A
 Copyright 1984
 Levelled 1959



Produced by
 Groundsure Insights
 T: 08444 159000
 E: info@groundsure.com
 W: www.groundsure.com

© Crown copyright and database rights 2018 Ordnance Survey 100035207

Production date: 22 May 2019

Map legend available at:
www.groundsure.com/sites/default/files/groundsure_legend.pdf



Site Details:

419815, 410001

Client Ref: YORKSHIRE_COUNTRY_PROPERTIES_7465
Report Ref: GS-6047538
Grid Ref: 419822, 409992

Map Name: National Grid

Map date: 1987-1992

Scale: 1:2,500

Printed at: 1:2,500



Surveyed N/A
 Revised N/A
 Edition N/A
 Copyright 1992
 Levelled N/A

Surveyed 1958
 Revised 1987
 Edition N/A
 Copyright 1987
 Levelled 1958

Surveyed 1992
 Revised 1992
 Edition N/A
 Copyright N/A
 Levelled N/A



Produced by
 Groundsure Insights
 T: 08444 159000
 E: info@groundsure.com
 W: www.groundsure.com

© Crown copyright and database rights 2018 Ordnance Survey 100035207

Production date: 22 May 2019

Map legend available at:
www.groundsure.com/sites/default/files/groundsure_legend.pdf



Site Details:

419815, 410001

Client Ref: YORKSHIRE_COUNTRY_PROPERTIES_7465
Report Ref: GS-6047538
Grid Ref: 419822, 409992

Map Name: National Grid

Map date: 1992-1994


Scale: 1:2,500

Printed at: 1:2,500



Surveyed N/A
 Revised N/A
 Edition N/A
 Copyright 1994
 Levelled N/A

Surveyed 1992
 Revised 1992
 Edition N/A
 Copyright N/A
 Levelled N/A

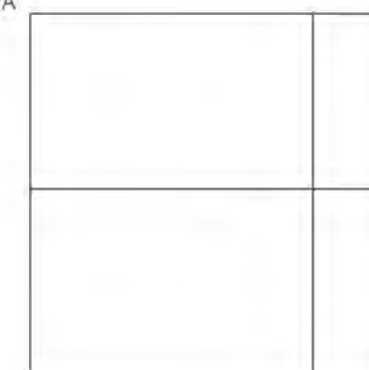

Surveyed 1993
 Revised 1993
 Edition N/A
 Copyright N/A
 Levelled N/A



Produced by
 Groundsure Insights
 T: 08444 159000
 E: info@groundsure.com
 W: www.groundsure.com

© Crown copyright and database rights 2018 Ordnance Survey 100035207

Production date: 22 May 2019

Map legend available at:
www.groundsure.com/sites/default/files/groundsure_legend.pdf



Site Details:

419815, 410001

Client Ref: YORKSHIRE_COUNTRY_PROPERTIES_7465
Report Ref: GS-6047538
Grid Ref: 419822, 409992

Map Name: National Grid


Map date: 1994

Scale: 1:2,500

Printed at: 1:2,500



Surveyed 1994
 Revised 1994
 Edition N/A
 Copyright 1994
 Levelled N/A



Produced by
 Groundsure Insights
 T: 08444 159000
 E: info@groundsure.com
 W: www.groundsure.com

© Crown copyright and database rights 2018 Ordnance Survey 100035207

Production date: 22 May 2019

Map legend available at:
www.groundsure.com/sites/default/files/groundsure_legend.pdf

