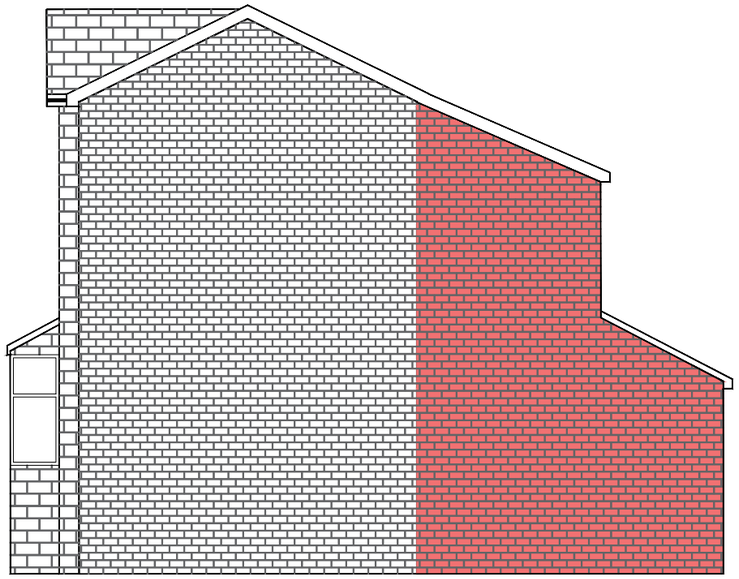

PROPOSED SIDE ELEVATION (NORTH EAST)

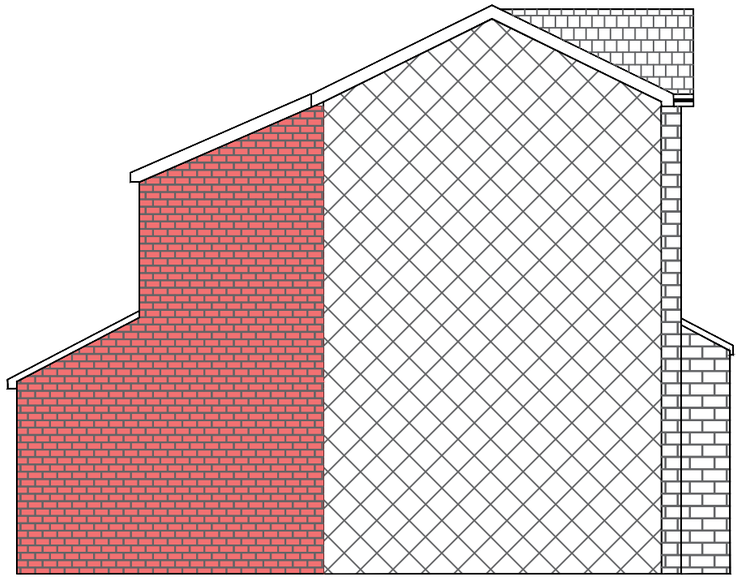

PROPOSED SIDE ELEVATION (SOUTH WEST)

KEYS

- Existing Tiles
- Proposed Marley tiles matching
- Existing Brick work
- Proposed Brick work matching
- Elevation through Gable end

1. Existing UPVC frame brown window
2. Proposed UPVC window in Brown colour
3. Existing upvc door
4. Proposed UPVC composite door in white colour
5. Proposed velux window in white colour
6. Proposed Bi-folding doors in white colour

All Facia / suffits /down pipes /gutters in Dark Grey / Black colour

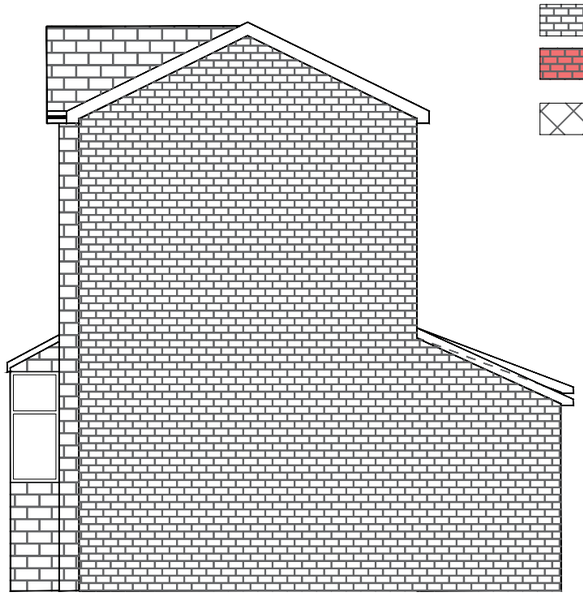

EXISTING SIDE ELEVATION (NORTH EAST)

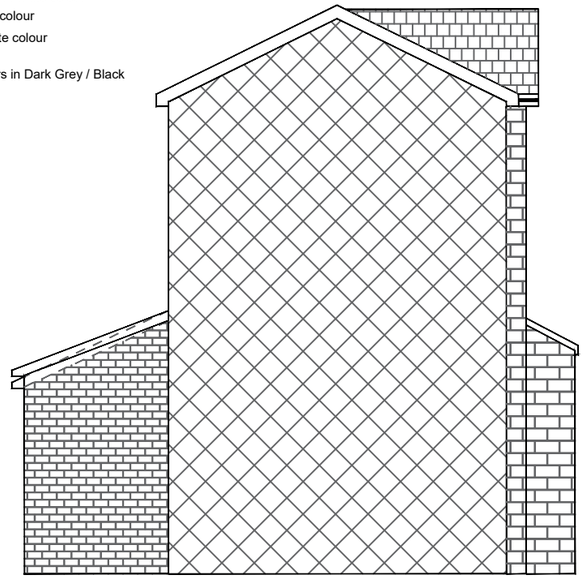

EXISTING SIDE ELEVATION (SOUTH WEST)

NOTES

This drawing is subject to a detailed building and site survey, therefore no guarantee of its accuracy can be given.
This drawing has been draughted in accordance with the clients design requirements.
All areas are approximate and are subject to a detailed building and site survey and further design development.
All dimensions should be checked prior to commencement of construction on site. Measurements should not be taken off the drawing.

Rev		Revision	Date

JOB

ADDRESS

3-5 MYRTLE AVENUE
DEWSBURY
WF13 3AP

MR MOHAMMAD NAVEED

DATE	SCALE	SHEET	
30/05/2024	1:100	5@A3	