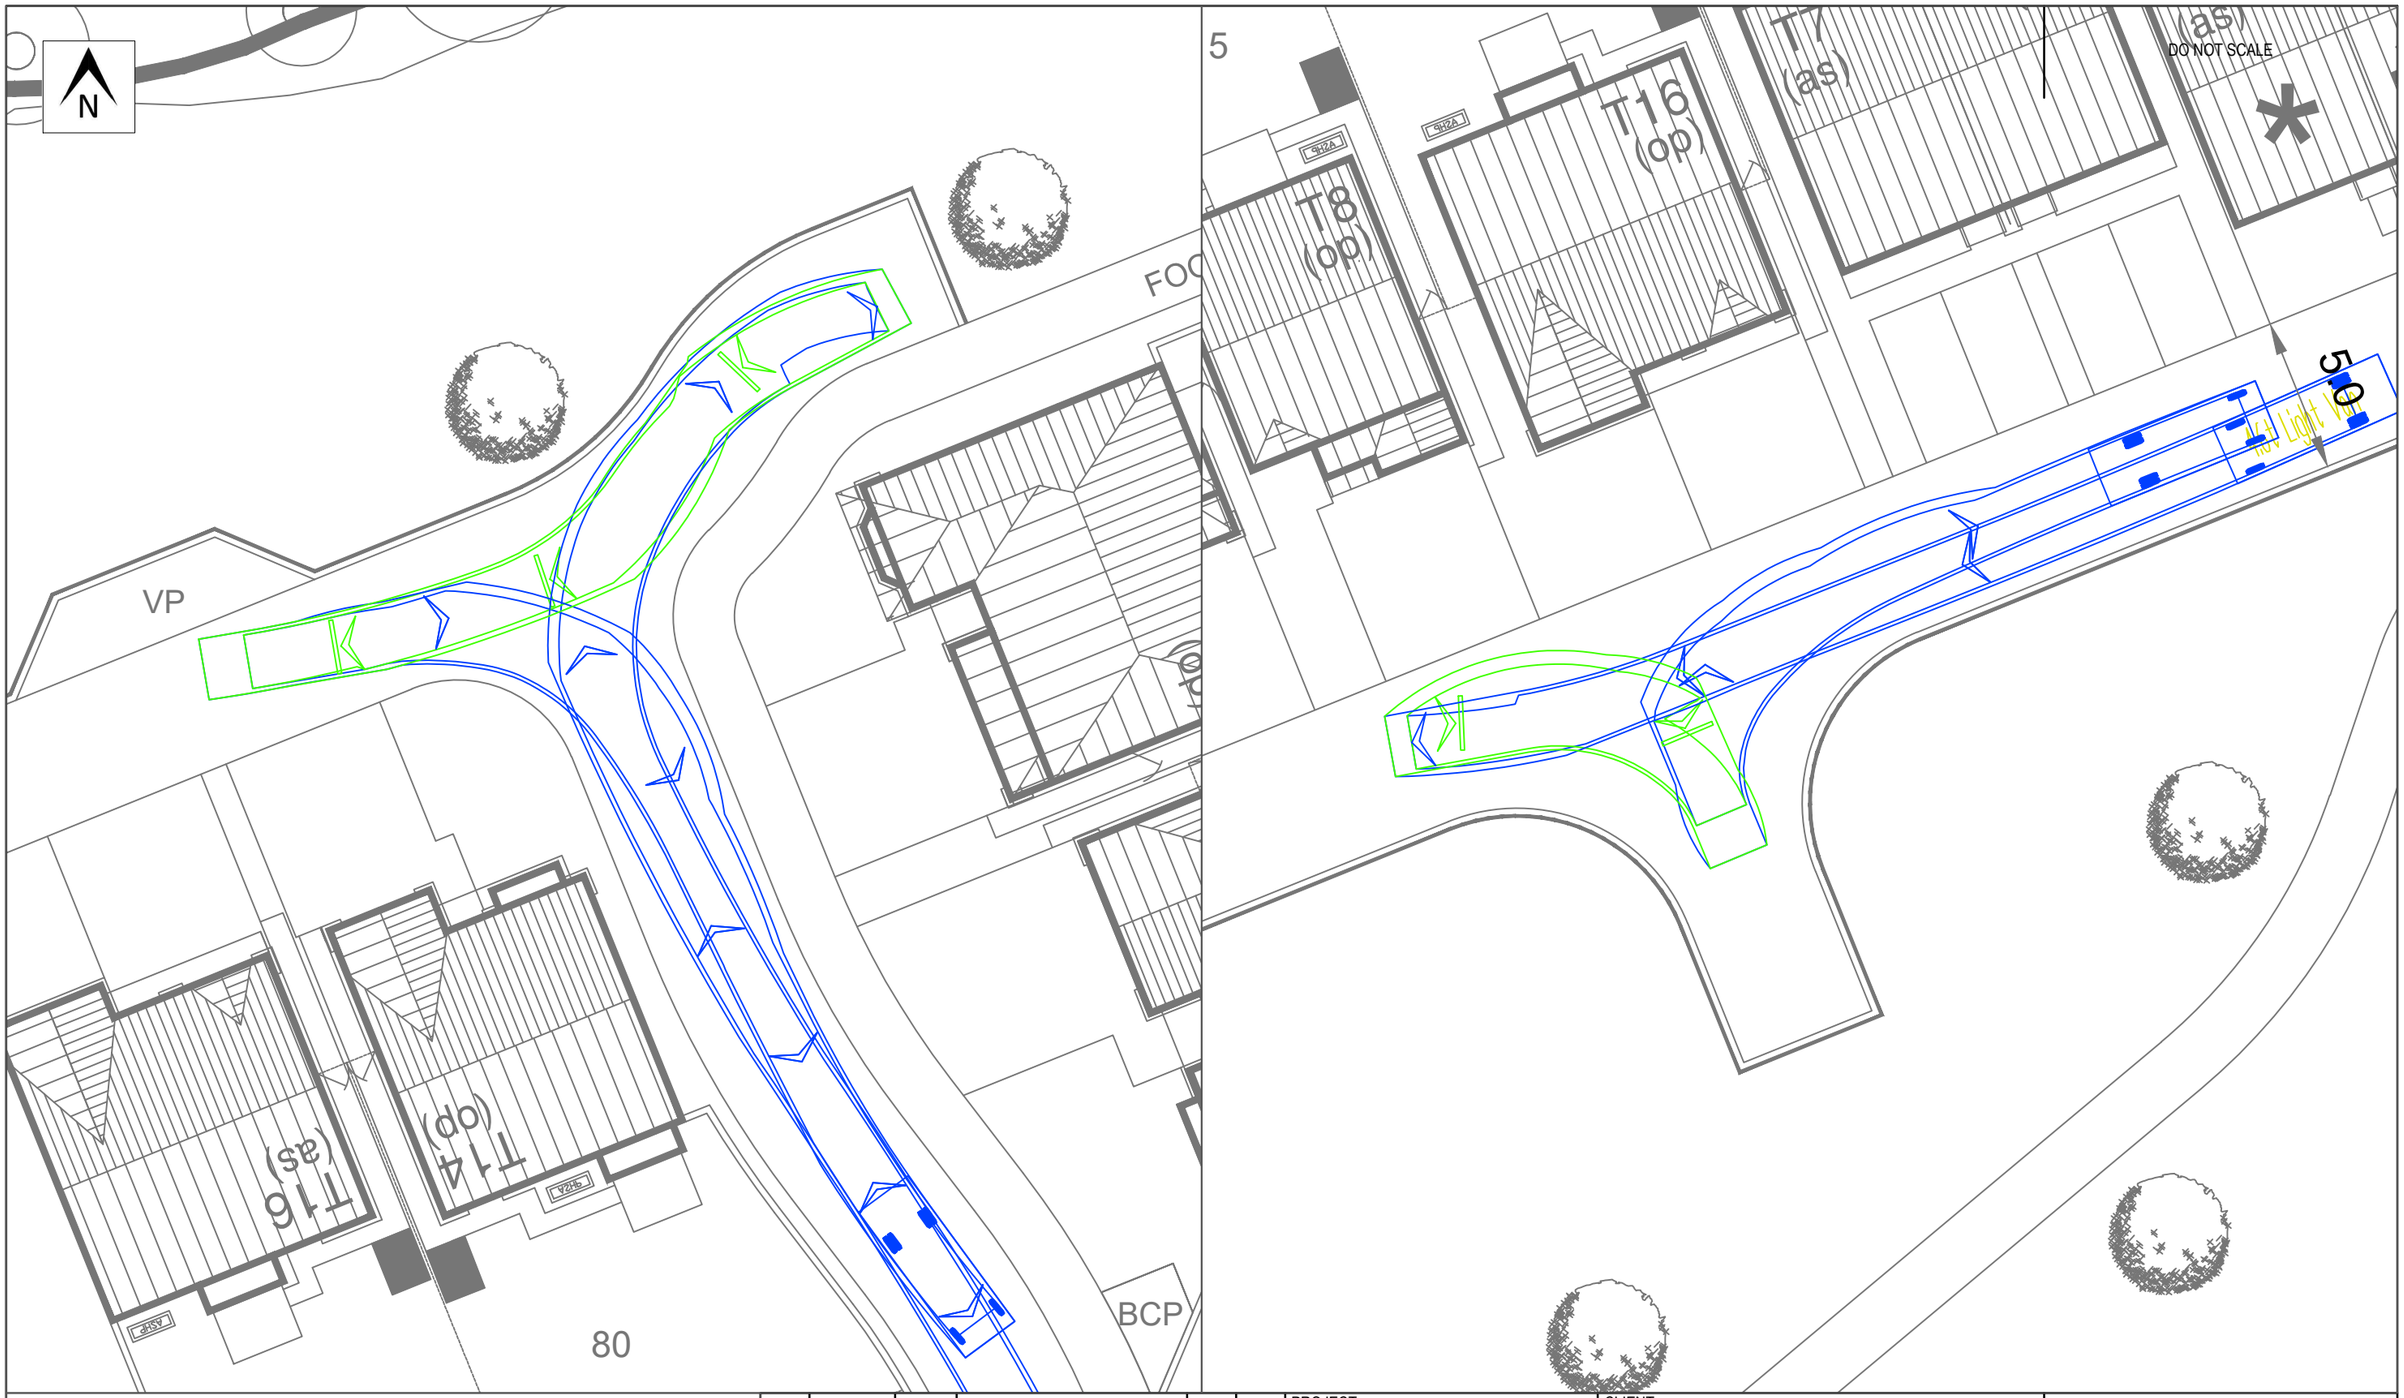



4.6t Light Van	
Overall Length	5.885m
Overall Width	2.000m
Overall Body Height	2.526m
Min Body Ground Clearance	0.299m
Track Width	1.765m
Lock to lock time	4.00s
Kerb to Kerb Turning Radius	6.000m

REV	DATE	BY	DESCRIPTION	CHK	APP
A	23/07/25	RP	UPDATED LAYOUT	PMO	PMO
-	17/04/25	RP	INITIAL ISSUE	PMO	PMO

STATUS: PRELIMINARY

PROJECT: ROSLYN AVENUE, NETHERTON

CLIENT: HARRON HOMES

DRAWING TITLE: SWEPT PATH ANALYSIS DELIVERY VEHICLE TRACKING

CHECKED	APPROVED	DRG No.	
PMO	PMO	25041/ATR/02	
DRAWN BY:	SCALE @ A3	DATE	REV.
RP	1:200	JULY 2025	A

OPTIMA
Intelligent Highway Solutions
Suite 1, 3rd Floor, Goodbard House, Infirmary Street
Leeds LS1 2JP
optimahighways.com T 0113 245 1679