


UNITED CHURCH, MARSDEN

SIDE WINDOW CONSERVATION STRATEGY | INDICATIVE DESIGN PRINCIPLE

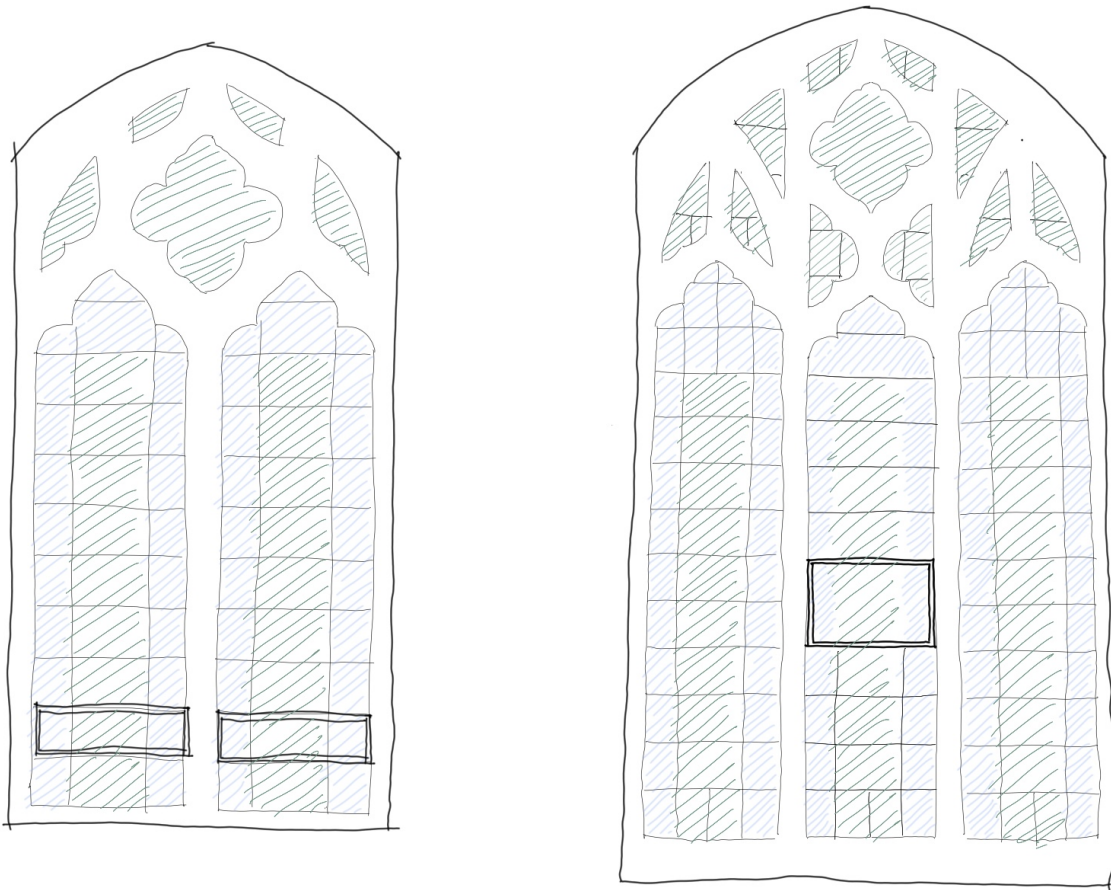

DESIGN INTENT

Retain and enhance the character of the two side elevation windows while introducing a limited amount of clear natural light to the proposed habitable rooms.

PRIMARY ELEVATION

The large, prominent stained-glass window to the primary elevation serves a non-habitable space and will be preserved in full and left untouched. The church will therefore retain its established appearance when viewed from the principal street frontage.

KEY

■ BLUE HATCH

Limited clear glazing introduced as slender linear strips alongside the retained stained glass, remaining subordinate to the historic composition.

■ GREEN HATCH

Existing stained glass retained, carefully repaired and reused. Elements of merit encapsulated where appropriate, following specialist advice.

CONSERVATION PRINCIPLES

- Retain and carefully repair all original stone tracery.
- Retain, repair and reuse all stained glass elements of merit.
- Use clear glazing only in a limited and proportionate manner.
- Allow the retained stained glass to remain the dominant visual element.
- Develop encapsulation, ventilation and opening details with specialist input.

PRIVACY

The relevant side windows are positioned above approximately 1.8 m from floor level. Limited clear glazing is therefore not anticipated to cause harmful overlooking, subject to detailed confirmation.

PUBLIC VIEWS

The proposed strategy relates only to secondary side windows that are not visible from the primary highway or from principal public views within the centre of Marsden.