Copyright: All rights reserved. This drawing must not be reproduced without permission.
Do not scale from this drawing.
Dimensions are in millimetres unless otherwise specified.

no	description	date	by	checked
A	door refs B & D amended	02.06.26	MJD	mjd
B	info added external mechanical services	25.06.26	MJD	mjd



EXISTING ELEVATION FACING SOUTH

0 1 2 3 4 5 10



EXISTING ELEVATION FACING EAST



EXISTING ELEVATION FACING NORTH



EXISTING ELEVATION FACING WEST



PROPOSED ELEVATION FACING SOUTH


0 1 2 3 4 5 10



PROPOSED ELEVATION FACING EAST



PROPOSED ELEVATION FACING NORTH

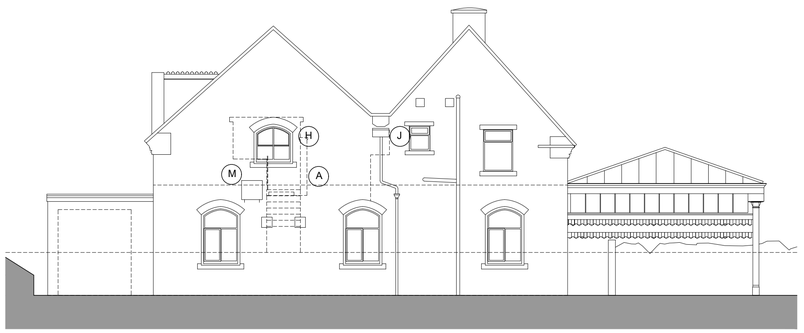

PROPOSED ELEVATION FACING WEST

KEY:

- (A) brick and steel fire escape bridge removed
- (B) existing doors replaced with new
- (C) existing window retained but opened up to new stair - refer to plans
- (D) existing doors replaced with new glazed doors - with t and g boarding above to match hay loft doors
- (E) existing door retained
- (F) existing doors replaced with new - to include diagonal boarding to match existing retained door
- (G) existing doors replaced with door/window combination - window provides natural light to peripatetic room.1
- (H) existing door and window removed and replaced with window with detailing to match original windows
- (J) dashed lines indicate position of external front wall of original building
- (L) dashed bold lines indicate adjacent timber / prefabricated structures
- (M) a.c.condenser unit - new vrf unit to replace aged and inefficient condenser
- (N) conservation roof light
- (P) original widow opening currently infilled with stone to be opened up and with new window and security grille
- ☐ indicates new fresh air grille - painted to match existing stone

Note: all existing and new doors to be painted mid/dark blue to match school colours.
all existing timber window frames to be repainted white

Drawing Status
PLANNING APPLICATION

Space
architecture and design limited
Park Bottom
Litton
Skipton
BD23 5QJ
t: 01756 520104
m: 07795 146905
e: md@spacearchitecture.net
w: www.spacearchitecture.net

Client
—

Project
Refurbishment of The Argyle Building
Huddersfield Grammar School
Luck Lane, Huddersfield
HD1 4QX

Drawing Title
Existing Elevations and
Proposed Elevations

COPYRIGHT ©

Scale @ A1	Scale @ A3	Date	Drawn	Checked	Drawing Number	Revision
1:100	1:200	24.04.26	MJD	mjd	26.004(2-)011	B